



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECfp<sup>®</sup>\_rate2006 = 576

### PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

### SPECfp\_rate\_base2006 = 561

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

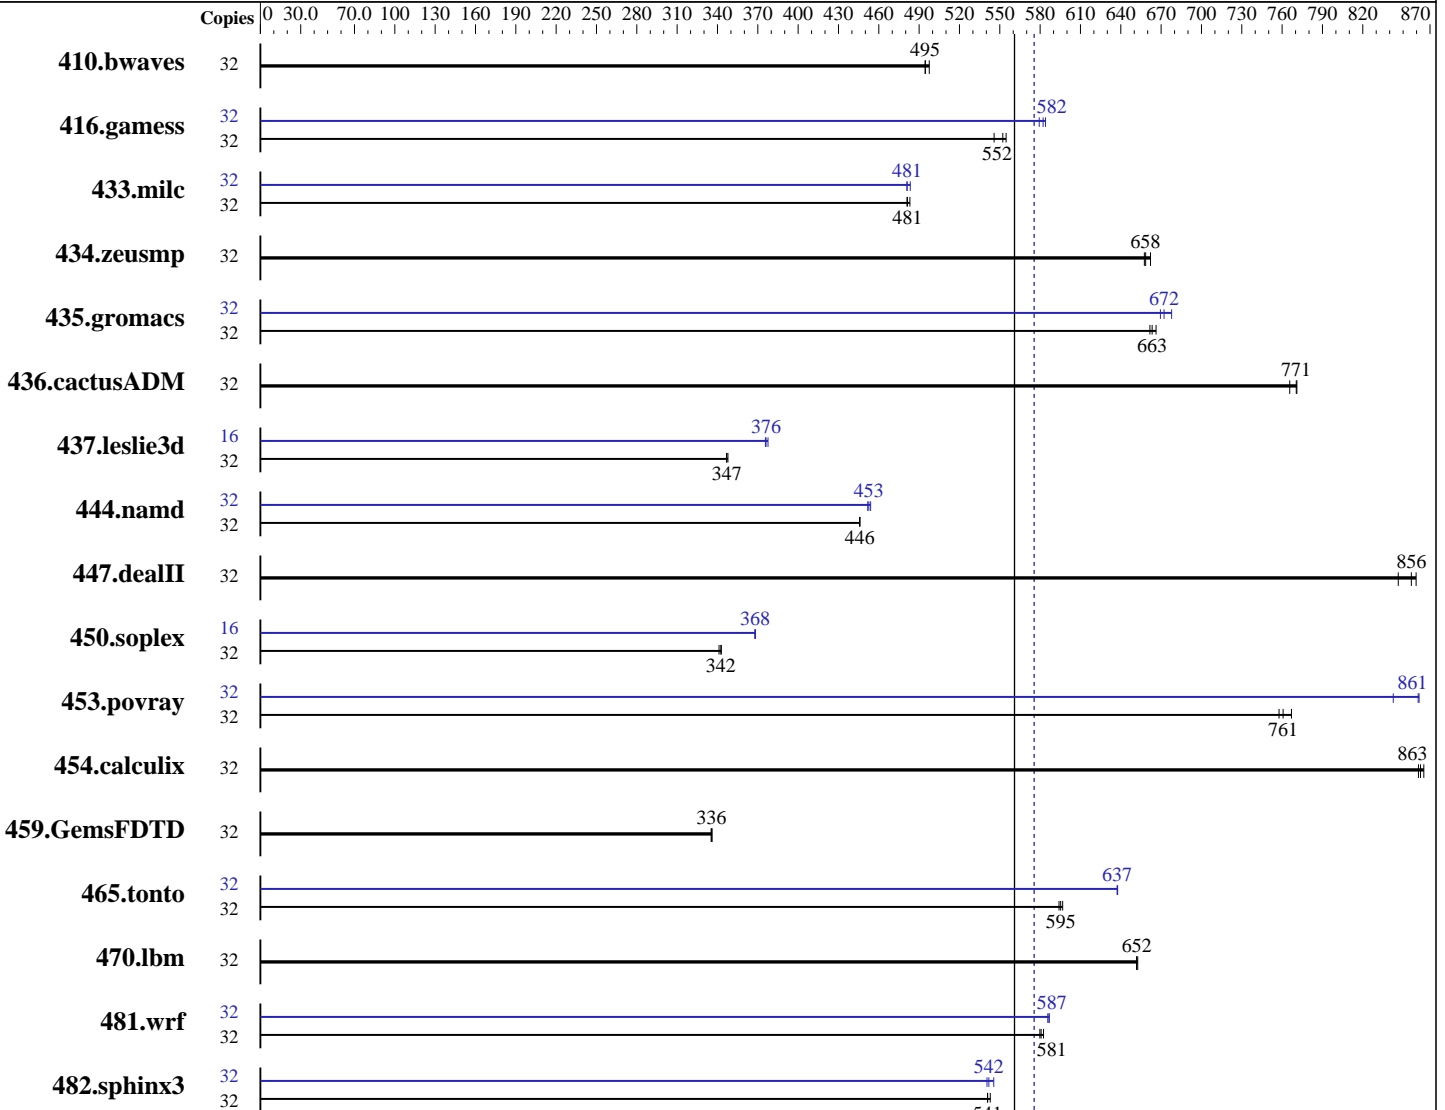

SPECfp\_rate\_base2006 = 561

SPECfp\_rate2006 = 576

### Hardware

CPU Name: Intel Xeon E5-2630 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
Disk Subsystem: 500 GB 7200 RPM SATA  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	874	498	<b>879</b>	<b>495</b>	879	494	32	874	498	<b>879</b>	<b>495</b>	879	494		
416.gamess	32	1130	555	<b>1135</b>	<b>552</b>	1148	546	32	1073	584	<b>1076</b>	<b>582</b>	1081	579		
433.milc	32	608	483	<b>610</b>	<b>481</b>	611	481	32	608	483	<b>611</b>	<b>481</b>	611	481		
434.zeusmp	32	440	662	<b>442</b>	<b>658</b>	443	658	32	440	662	<b>442</b>	<b>658</b>	443	658		
435.gromacs	32	343	666	<b>344</b>	<b>663</b>	345	662	32	341	669	<b>340</b>	<b>672</b>	337	678		
436.cactusADM	32	<b>496</b>	<b>771</b>	499	766	496	771	32	<b>496</b>	<b>771</b>	499	766	496	771		
437.leslie3d	32	868	347	865	348	<b>867</b>	<b>347</b>	16	<b>400</b>	<b>376</b>	400	376	398	378		
444.namd	32	<b>576</b>	<b>446</b>	575	446	576	446	32	565	454	568	452	<b>567</b>	<b>453</b>		
447.dealII	32	433	846	<b>428</b>	<b>856</b>	426	860	32	433	846	<b>428</b>	<b>856</b>	426	860		
450.soplex	32	778	343	782	341	<b>779</b>	<b>342</b>	16	<b>363</b>	<b>368</b>	363	368	362	368		
453.povray	32	<b>224</b>	<b>761</b>	225	758	222	767	32	198	862	202	843	<b>198</b>	<b>861</b>		
454.calculix	32	<b>306</b>	<b>863</b>	305	865	306	861	32	<b>306</b>	<b>863</b>	305	865	306	861		
459.GemsFDTD	32	1013	335	<b>1011</b>	<b>336</b>	1011	336	32	1013	335	<b>1011</b>	<b>336</b>	1011	336		
465.tonto	32	528	597	530	594	<b>529</b>	<b>595</b>	32	494	638	494	637	<b>494</b>	<b>637</b>		
470.lbm	32	674	653	675	652	<b>674</b>	<b>652</b>	32	674	653	675	652	<b>674</b>	<b>652</b>		
481.wrf	32	<b>615</b>	<b>581</b>	616	580	614	583	32	609	587	610	586	<b>609</b>	<b>587</b>		
482.sphinx3	32	<b>1153</b>	<b>541</b>	1149	543	1153	541	32	1143	546	<b>1151</b>	<b>542</b>	1154	540		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Snoop Mode set to Cluster on Die  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

## Platform Notes (Continued)

System Profile set to Performance  
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Tue May 12 22:06:01 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2630 v3 @ 2.40GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264045624 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 12 10:32
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  489G  8.1G  456G   2% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 04/16/2015

Memory:

13x 00AD00B300AD HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1866 MHz

3x 00AD063200AD HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz, configured at 1866 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test date: May-2015

Test sponsor: Dell Inc.

Hardware Availability: May-2015

Tested by: Dell Inc.

Software Availability: Nov-2014

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revE.20150421.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 576

PowerEdge R530xd (Intel Xeon E5-2630 v3, 2.40 GHz)

SPECfp\_rate\_base2006 = 561

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: May-2015

Hardware Availability: May-2015

Software Availability: Nov-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jun 17 10:49:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 June 2015.