



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®2006 = 48.2

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = 46.8

CPU2006 license: 9017


Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

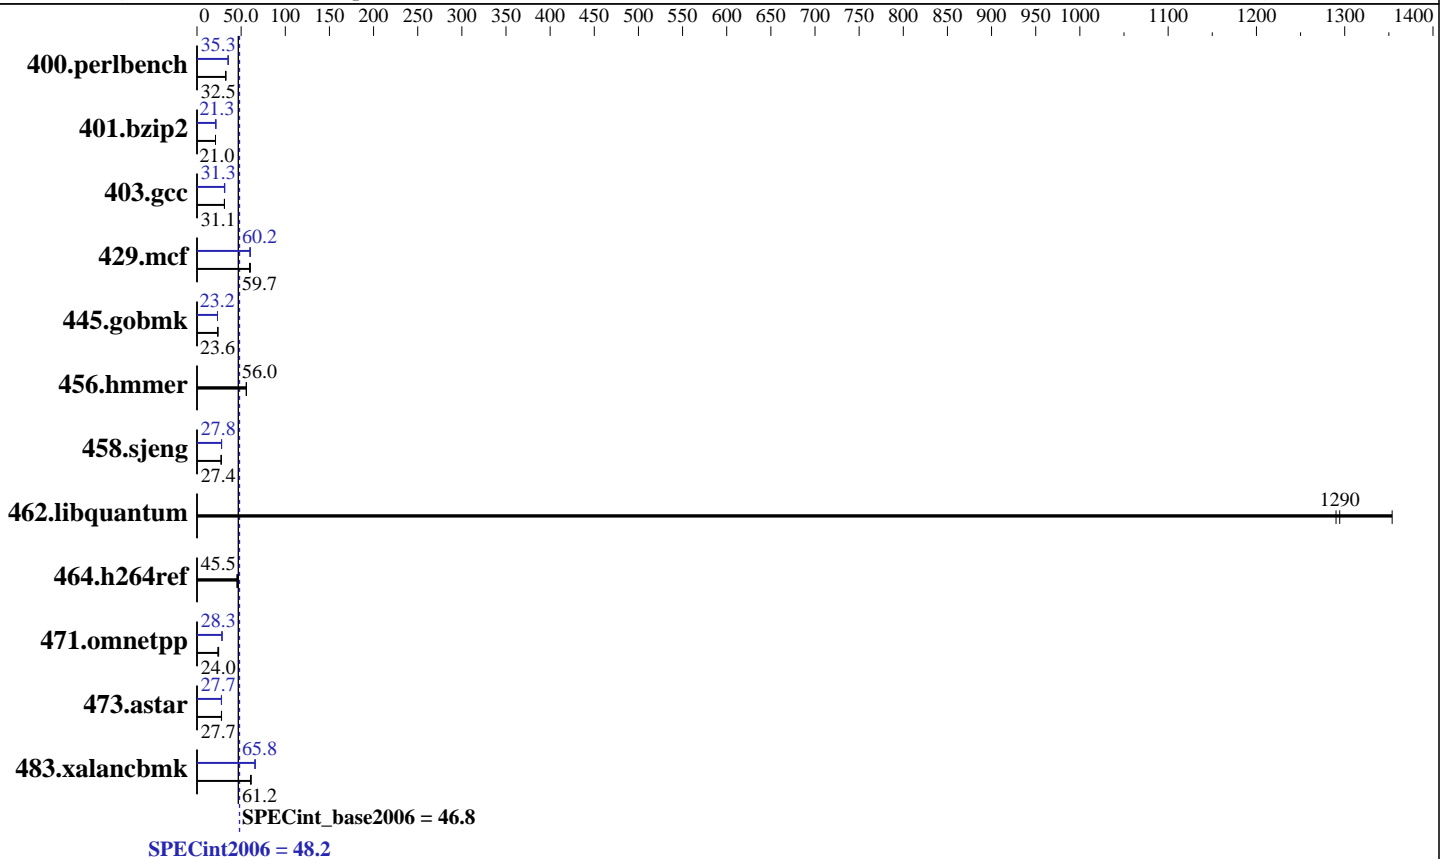

Hardware

CPU Name: Intel Xeon E3-1230L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB 2Rx8 PC3L-12800E-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = **48.2**

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = **46.8**

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	299	32.7	300	32.5	301	32.5	<u>277</u>	<u>35.3</u>	277	35.3	277	35.3
401.bzip2	460	21.0	460	21.0	460	21.0	453	21.3	453	21.3	<u>453</u>	<u>21.3</u>
403.gcc	259	31.1	259	31.1	259	31.0	256	31.4	259	31.1	<u>257</u>	<u>31.3</u>
429.mcf	153	59.6	151	60.5	153	59.7	151	60.4	152	60.0	<u>151</u>	<u>60.2</u>
445.gobmk	445	23.6	445	23.6	445	23.6	452	23.2	452	23.2	452	23.2
456.hammer	167	56.0	167	55.8	167	56.0	<u>167</u>	<u>56.0</u>	167	55.8	167	56.0
458.sjeng	441	27.4	441	27.4	441	27.4	435	27.8	435	27.8	<u>435</u>	<u>27.8</u>
462.libquantum	15.3	1350	16.0	1290	16.1	1290	15.3	1350	16.0	1290	16.1	1290
464.h264ref	486	45.5	485	45.6	486	45.5	<u>486</u>	<u>45.5</u>	485	45.6	486	45.5
471.omnetpp	255	24.5	263	23.8	260	24.0	221	28.3	221	28.3	<u>221</u>	<u>28.3</u>
473.astar	252	27.8	254	27.7	253	27.7	253	27.8	254	27.6	<u>254</u>	<u>27.7</u>
483.xalancbmk	113	61.2	113	61.3	114	60.6	105	65.7	105	65.8	105	65.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:

Hyper-Threading set to Disable

Operating Mode set to "Efficiency-Favor Performance"

Sysinfo program /root/cpu2006_icl6/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on x3100m5.labs.lenovo.com Thu Oct 1 07:00:13 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1230L v3 @ 1.80GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 48.2

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = 46.8

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Platform Notes (Continued)

```
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16100784 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux x3100m5.labs.lenovo.com 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29
18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 1 06:51
```

```
SPEC is set to: /root/cpu2006_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   49G  1.6G  97% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[J9E113LUS-1.05]- 07/06/2014

Memory:
4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 2 rank 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/cpu2006_ic16/libs/32:/root/cpu2006_ic16/libs/64:/root/cpu2006_ic16/sh"
OMP_NUM_THREADS = "4"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 48.2

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = 46.8

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 48.2

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = 46.8

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 48.2

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint_base2006 = 46.8

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3100 M5
(Intel Xeon E3-1230L v3, 2.80 GHz)

SPECint2006 = 48.2

SPECint_base2006 = 46.8

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: May-2014

Software Availability: Jun-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 3 11:55:53 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 November 2015.