



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Feb-2016

Hardware Availability: Jul-2015

Software Availability: Nov-2015

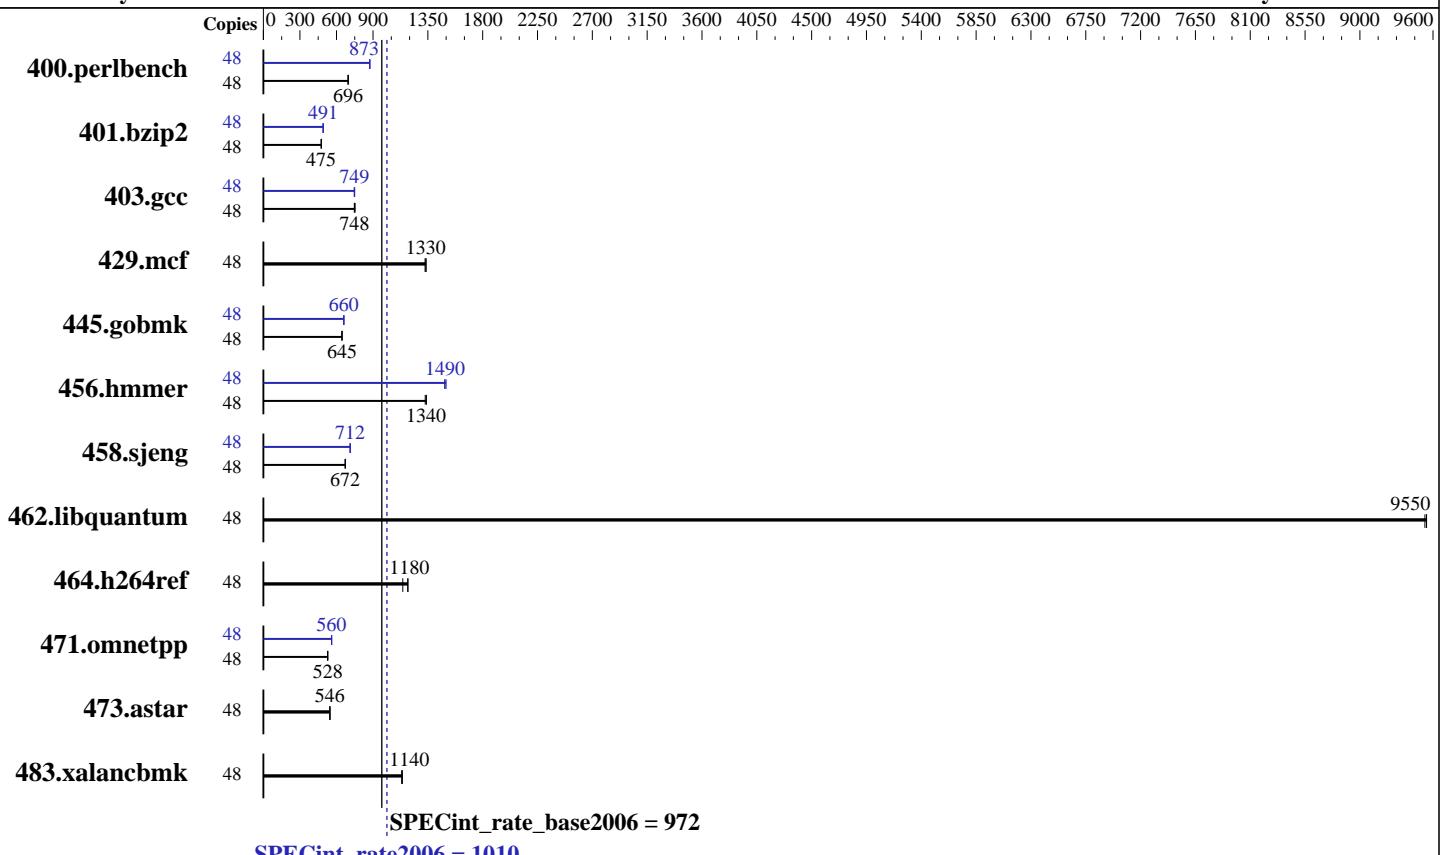

## Hardware

CPU Name: Intel Xeon E5-2670 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
CPU MHz: 2300  
FPU: Integrated  
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 2 x 800 GB SSD, RAID 1  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
Compiler: Kernel 3.10.0-327.el7.x86\_64  
Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

CPU2006 license: 3

Test date: Feb-2016

Test sponsor: HPE

Hardware Availability: Jul-2015

Tested by: HPE

Software Availability: Nov-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	<b>674</b>	<b>696</b>	675	695	673	697	48	<b>537</b>	<b>873</b>	537	873	537	874
401.bzip2	48	<b>975</b>	<b>475</b>	975	475	975	475	48	<b>944</b>	<b>491</b>	944	490	943	491
403.gcc	48	513	753	<b>516</b>	<b>748</b>	518	746	48	<b>516</b>	<b>749</b>	516	749	518	745
429.mcf	48	330	1330	<b>328</b>	<b>1330</b>	328	1340	48	330	1330	<b>328</b>	<b>1330</b>	328	1340
445.gobmk	48	<b>780</b>	<b>645</b>	781	645	780	646	48	762	660	<b>763</b>	<b>660</b>	763	660
456.hammer	48	335	1340	337	1330	<b>335</b>	<b>1340</b>	48	299	1500	301	1490	<b>300</b>	<b>1490</b>
458.sjeng	48	864	672	864	672	<b>864</b>	<b>672</b>	48	815	712	814	713	<b>815</b>	<b>712</b>
462.libquantum	48	<b>104</b>	<b>9550</b>	104	9550	104	9530	48	<b>104</b>	<b>9550</b>	104	9550	104	9530
464.h264ref	48	895	1190	<b>897</b>	<b>1180</b>	928	1140	48	895	1190	<b>897</b>	<b>1180</b>	928	1140
471.omnetpp	48	569	527	568	528	<b>568</b>	<b>528</b>	48	<b>536</b>	<b>560</b>	536	559	534	562
473.astar	48	617	546	617	546	<b>617</b>	<b>546</b>	48	617	546	617	546	<b>617</b>	<b>546</b>
483.xalancbmk	48	292	1140	<b>291</b>	<b>1140</b>	290	1140	48	292	1140	<b>291</b>	<b>1140</b>	290	1140

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core State set to C6 State

Minimum Processor Idle Power Package State set to No Package State

QPI Snoop Configuration set to Cluster on Die

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL190r Gen9

(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Feb-2016

**Hardware Availability:** Jul-2015

**Software Availability:** Nov-2015

## Platform Notes (Continued)

```
Sysinfo program /cpu/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$
running on apollo3115.epc.ext.hpe.com Thu Feb 4 22:12:50 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2670 v3 @ 2.30GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 12
        siblings : 24
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263715360 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 7.2 (Maipo)
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux apollo3115.epc.ext.hpe.com 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29
17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 4 13:30
```

```
SPEC is set to: /cpu
Filesystem           Type  Size  Used  Avail Use% Mounted on
/dev/mapper/rootvg01-lv01 ext4 733G 49G 647G 7% /
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Feb-2016

**Hardware Availability:** Jul-2015

**Software Availability:** Nov-2015

## Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U14 07/20/2015  
Memory:  
16x HP 752369-081 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
`LD_LIBRARY_PATH = "/cpu/libs/32:/cpu/libs/64:/cpu/sh"`

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

## Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`  
401.bzip2: `-D_FILE_OFFSET_BITS=64`  
403.gcc: `-D_FILE_OFFSET_BITS=64`  
429.mcf: `-D_FILE_OFFSET_BITS=64`  
445.gobmk: `-D_FILE_OFFSET_BITS=64`  
456.hmmer: `-D_FILE_OFFSET_BITS=64`  
458.sjeng: `-D_FILE_OFFSET_BITS=64`  
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`  
464.h264ref: `-D_FILE_OFFSET_BITS=64`  
471.omnetpp: `-D_FILE_OFFSET_BITS=64`  
473.astar: `-D_FILE_OFFSET_BITS=64`  
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2016

Hardware Availability: Jul-2015

Software Availability: Nov-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Feb-2016

Hardware Availability: Jul-2015

Software Availability: Nov-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant XL190r Gen9  
(2.30 GHz, Intel Xeon E5-2670 v3)

**SPECint\_rate2006 = 1010**

**SPECint\_rate\_base2006 = 972**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Feb-2016

**Hardware Availability:** Jul-2015

**Software Availability:** Nov-2015

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 23 17:37:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 February 2016.