



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

CPU2006 license: 9017


Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

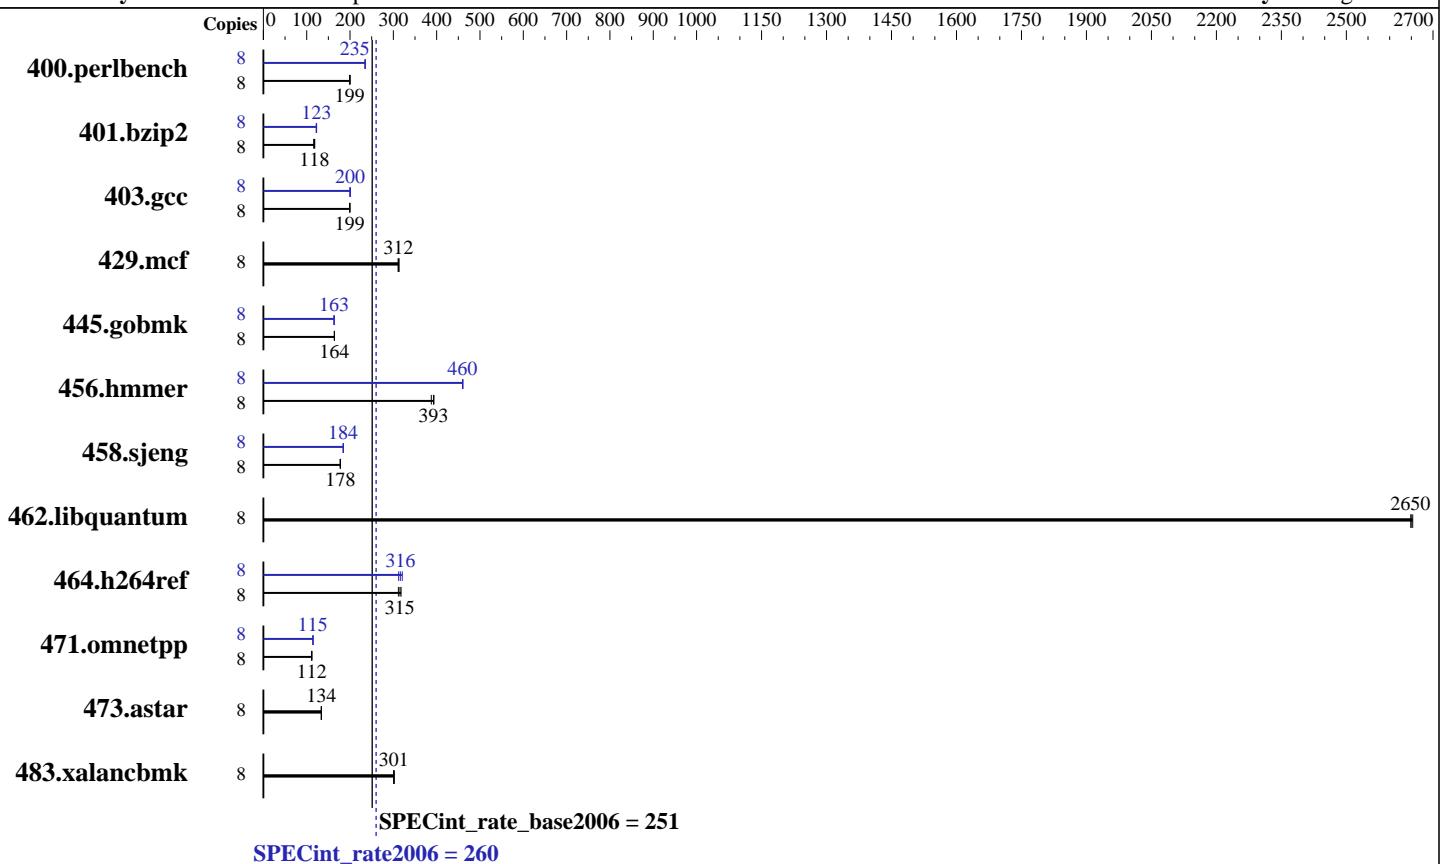

### Hardware

CPU Name:	Intel Xeon E3-1275 v5
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	3600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64)
Compiler:	Kernel 3.12.28-4-default
Auto Parallel:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
File System:	No
System State:	xfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

CPU2006 license: 9017

Test date: Feb-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	390	200	393	199	<b>392</b>	<b>199</b>	8	<b>333</b>	<b>235</b>	333	235	332	235
401.bzip2	8	652	118	<b>653</b>	<b>118</b>	665	116	8	634	122	<b>629</b>	<b>123</b>	628	123
403.gcc	8	322	200	<b>323</b>	<b>199</b>	324	199	8	<b>322</b>	<b>200</b>	321	201	322	200
429.mcf	8	235	311	<b>234</b>	<b>312</b>	233	313	8	235	311	<b>234</b>	<b>312</b>	233	313
445.gobmk	8	511	164	512	164	<b>512</b>	<b>164</b>	8	514	163	514	163	<b>514</b>	<b>163</b>
456.hammer	8	190	394	<b>190</b>	<b>393</b>	193	388	8	<b>162</b>	<b>460</b>	162	460	162	461
458.sjeng	8	546	177	544	178	<b>544</b>	<b>178</b>	8	525	184	525	184	<b>525</b>	<b>184</b>
462.libquantum	8	62.6	2650	62.5	2650	<b>62.6</b>	<b>2650</b>	8	62.6	2650	62.5	2650	<b>62.6</b>	<b>2650</b>
464.h264ref	8	568	312	557	318	<b>562</b>	<b>315</b>	8	567	312	552	321	<b>560</b>	<b>316</b>
471.omnetpp	8	<b>448</b>	<b>112</b>	448	112	448	112	8	437	114	<b>437</b>	<b>115</b>	436	115
473.astar	8	420	134	419	134	<b>419</b>	<b>134</b>	8	420	134	419	134	<b>419</b>	<b>134</b>
483.xalancbmk	8	183	302	183	301	<b>183</b>	<b>301</b>	8	183	302	183	301	<b>183</b>	<b>301</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

## Platform Notes

BIOS Configuration:

EIST Support set to Enabled

Intel (R) Hyper-Threading set to Enabled

C1E Support set to Enabled

C State Support set to Enabled

Turbo Mode set to Enable

Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on TS450-SLE12 Thu Feb 18 16:37:00 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1275 v5 @ 3.60GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 8
    physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32932764 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux TS450-SLE12 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 18 16:34
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        xfs   600G  7.6G  593G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO FWKT32A 12/25/2015  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Platform Notes (Continued)

### Memory:

4x Samsung M378A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

### C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

### C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

### C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Feb-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
403.gcc: -D_FILE_OFFSET_BITS=64  
429.mcf: -D_FILE_OFFSET_BITS=64  
445.gobmk: -D_FILE_OFFSET_BITS=64  
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64  
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Feb-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Aug-2015

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS450  
(3.60 GHz, Intel Xeon E3-1275 v5)

**SPECint\_rate2006 = 260**

**SPECint\_rate\_base2006 = 251**

**CPU2006 license:** 9017

**Test date:** Feb-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Oct-2015

**Tested by:** Lenovo Group Limited

**Software Availability:** Aug-2015

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 8 12:33:03 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 March 2016.