



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2016

Hardware Availability: Dec-2014

Software Availability: Nov-2015

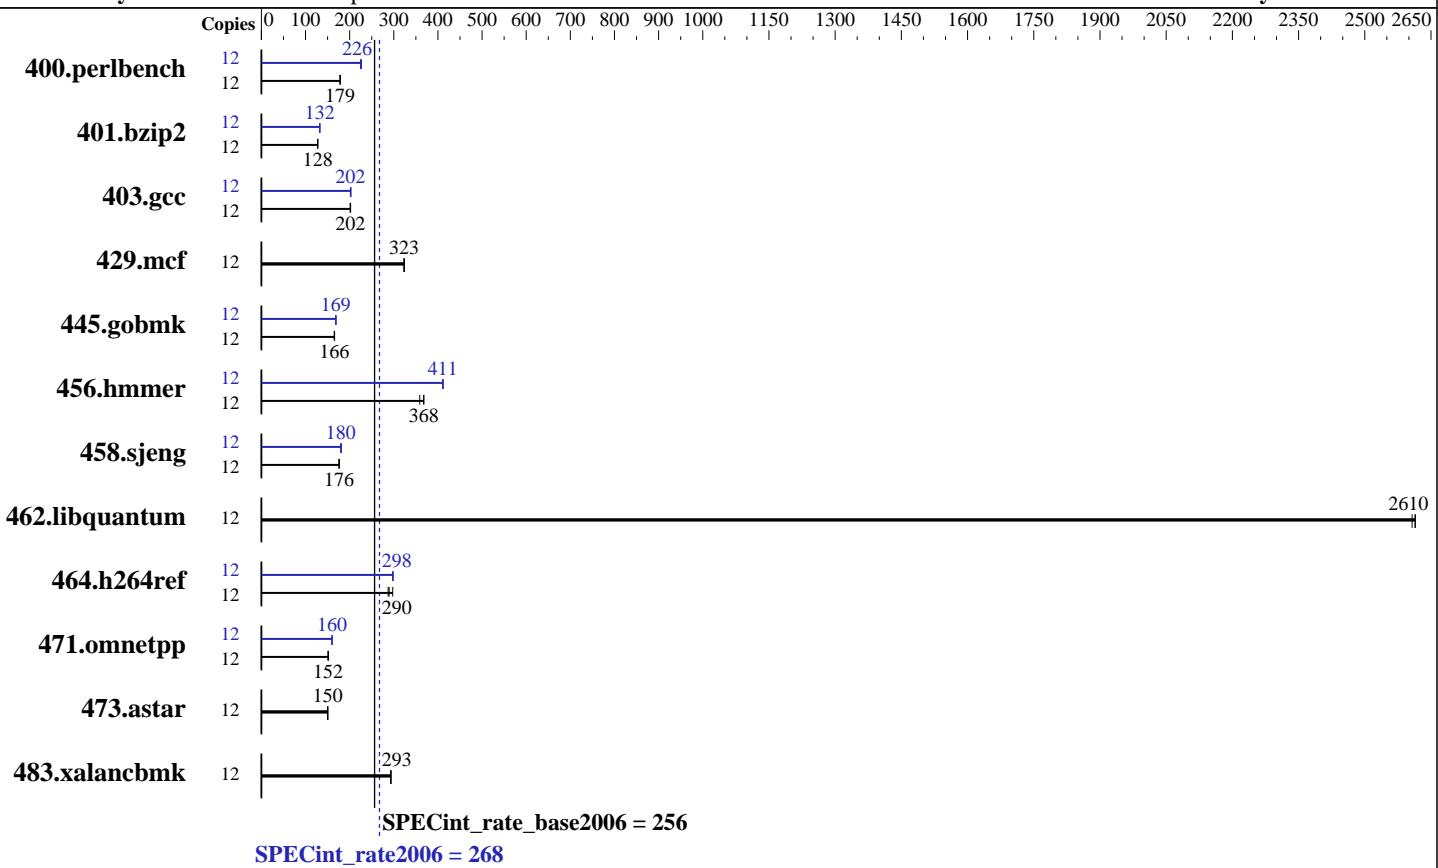

Hardware		Software	
CPU Name:	Intel Xeon E5-2620 v3	Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz	Compiler:	Kernel 3.10.0-327.el7.x86_64
CPU MHz:	2400	Auto Parallel:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
FPU:	Integrated	File System:	No
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core	System State:	xfs
CPU(s) orderable:	1,2 chips	Base Pointers:	Run level 3 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	32/64-bit
L3 Cache:	15 MB I+D on chip per chip		Microquill SmartHeap V10.0
Other Cache:	None		
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)		
Disk Subsystem:	1 x 800 GB SATA SSD		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

CPU2006 license: 9017

Test date: Mar-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	656	179	<b>657</b>	<b>179</b>	658	178	12	<b>518</b>	<b>226</b>	517	227	522	225
401.bzip2	12	908	128	<b>907</b>	<b>128</b>	907	128	12	<b>875</b>	<b>132</b>	<b>875</b>	<b>132</b>	874	132
403.gcc	12	478	202	481	201	<b>478</b>	<b>202</b>	12	<b>478</b>	<b>202</b>	479	202	476	203
429.mcf	12	338	324	<b>338</b>	<b>323</b>	339	323	12	338	324	<b>338</b>	<b>323</b>	339	323
445.gobmk	12	<b>759</b>	<b>166</b>	759	166	763	165	12	<b>746</b>	<b>169</b>	746	169	745	169
456.hammer	12	304	368	<b>304</b>	<b>368</b>	312	359	12	272	412	273	410	<b>272</b>	<b>411</b>
458.sjeng	12	823	176	<b>823</b>	<b>176</b>	826	176	12	<b>807</b>	<b>180</b>	801	181	807	180
462.libquantum	12	95.1	2610	<b>95.1</b>	<b>2610</b>	95.4	2610	12	95.1	2610	<b>95.1</b>	<b>2610</b>	95.4	2610
464.h264ref	12	<b>917</b>	<b>290</b>	925	287	892	298	12	890	299	893	297	<b>892</b>	<b>298</b>
471.omnetpp	12	497	151	493	152	<b>495</b>	<b>152</b>	12	470	160	468	160	<b>468</b>	<b>160</b>
473.astar	12	<b>560</b>	<b>150</b>	562	150	560	150	12	<b>560</b>	<b>150</b>	562	150	560	150
483.xalancbmk	12	282	293	<b>282</b>	<b>293</b>	282	294	12	282	293	<b>282</b>	<b>293</b>	282	294

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Configuration:

Cluster On Die set to Enabled  
Early Snoop set to Disabled  
Performance Profile set to Custom  
C1E Support set to Disabled  
Core C3 set to Disabled  
Core C6 set to Disabled  
Thermal Profile set to High Fan Speed  
Memory Power Savings set to Disabled  
Sysinfo program /home/cpu2006-ic15/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Thu Mar 3 19:53:58 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

**CPU2006 license:** 9017

**Test date:** Mar-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2015

## Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2620 v3 @ 2.40GHz
        1 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
    cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:       131919248 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 3 19:32
```

```
SPEC is set to: /home/cpu2006-ic15
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   411G  5.5G  406G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO VB3TS155 01/13/2016

Memory:
8x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1866 MHz
8x NO DIMM NO DIMM

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

**CPU2006 license:** 9017

**Test date:** Mar-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2015

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-ic15/libs/32:/home/cpu2006-ic15/libs/64:/home/cpu2006-ic15/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

**CPU2006 license:** 9017

**Test date:** Mar-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2015

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer RD350  
(2.40 GHz, Intel Xeon E5-2620 v3)

**SPECint\_rate2006 = 268**

**SPECint\_rate\_base2006 = 256**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Mar-2016

**Hardware Availability:** Dec-2014

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Mar 30 10:57:01 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 March 2016.