



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp®2006 = 124**

**SPECfp\_base2006 = 116**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

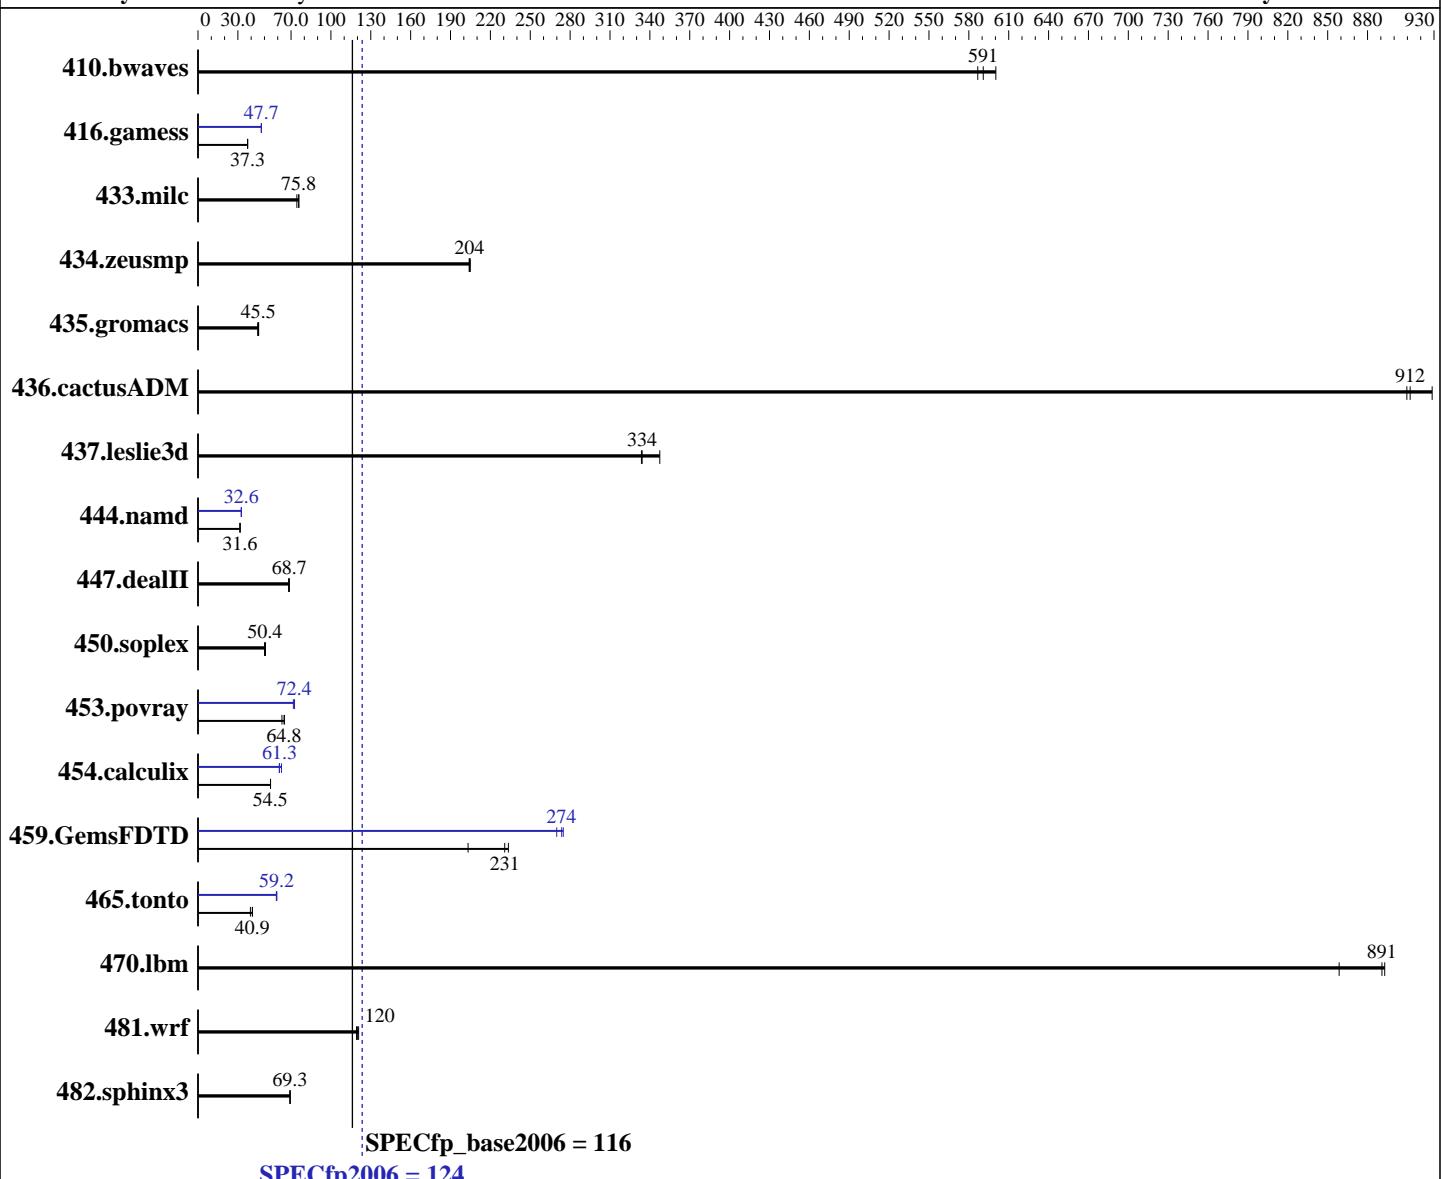

### Hardware

CPU Name: Intel Xeon E5-2698 v4  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2200  
FPU: Integrated  
CPU(s) enabled: 40 cores, 2 chips, 20 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64) 3.12.49-11-default  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 = 124**

**SPECfp\_base2006 = 116**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

L3 Cache: 50 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 1.8 TB SSD SAS HDD  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>23.0</b>	<b>591</b>	23.2	587	22.6	600	<b>23.0</b>	<b>591</b>	23.2	587	22.6	600
416.gamess	524	37.4	<b>525</b>	<b>37.3</b>	525	37.3	411	47.6	<b>410</b>	<b>47.7</b>	410	47.7
433.milc	123	74.4	121	75.9	<b>121</b>	<b>75.8</b>	123	74.4	121	75.9	<b>121</b>	<b>75.8</b>
434.zeusmp	<b>44.5</b>	<b>204</b>	44.4	205	44.6	204	<b>44.5</b>	<b>204</b>	44.4	205	44.6	204
435.gromacs	<b>157</b>	<b>45.5</b>	159	44.9	156	45.6	<b>157</b>	<b>45.5</b>	159	44.9	156	45.6
436.cactusADM	13.1	910	<b>13.1</b>	<b>912</b>	12.9	929	13.1	910	<b>13.1</b>	<b>912</b>	12.9	929
437.leslie3d	27.1	347	28.2	334	<b>28.1</b>	<b>334</b>	27.1	347	28.2	334	<b>28.1</b>	<b>334</b>
444.namd	253	31.7	254	31.6	<b>254</b>	<b>31.6</b>	246	32.6	<b>246</b>	<b>32.6</b>	246	32.6
447.dealII	168	68.2	167	68.7	<b>167</b>	<b>68.7</b>	168	68.2	167	68.7	<b>167</b>	<b>68.7</b>
450.soplex	164	50.8	<b>165</b>	<b>50.4</b>	167	50.1	164	50.8	<b>165</b>	<b>50.4</b>	167	50.1
453.povray	<b>82.1</b>	<b>64.8</b>	84.2	63.2	81.8	65.0	<b>73.5</b>	<b>72.4</b>	73.2	72.6	74.1	71.8
454.calculix	151	54.5	151	54.6	<b>151</b>	<b>54.5</b>	131	62.8	135	61.1	<b>135</b>	<b>61.3</b>
459.GemsFDTD	<b>46.0</b>	<b>231</b>	52.2	203	45.4	234	<b>38.8</b>	<b>274</b>	39.3	270	38.6	275
465.tonto	240	41.0	<b>241</b>	<b>40.9</b>	250	39.4	166	59.3	167	59.0	<b>166</b>	<b>59.2</b>
470.lbm	15.4	893	16.0	859	<b>15.4</b>	<b>891</b>	15.4	893	16.0	859	<b>15.4</b>	<b>891</b>
481.wrf	93.6	119	92.4	121	<b>93.1</b>	<b>120</b>	93.6	119	92.4	121	<b>93.1</b>	<b>120</b>
482.sphinx3	282	69.1	281	69.4	<b>281</b>	<b>69.3</b>	282	69.1	281	69.4	<b>281</b>	<b>69.3</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology option set to Disabled

CPU performance set to Enterprise

Power Technology set to Energy Efficient

Energy Performance BIAS setting set to Balanced Performance

Memory RAS configuration set to Maximum Performance

Memory Power Saving Mode set to Disabled

QPI Snoop Mode set to Home Directory Snoop with OSB

Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 =**

**124**

**SPECfp\_base2006 =**

**116**

**CPU2006 license:** 9019

**Test date:** Jul-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Platform Notes (Continued)

running on linux-103t Wed Jul 13 18:57:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2698 v4 @ 2.20GHz
        2 "physical id"s (chips)
        40 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 20
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
        physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    cache size : 51200 kB
```

```
From /proc/meminfo
MemTotal:       264566368 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-103t 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 12 19:55
```

SPEC is set to: /home/cpu2006-1.2  
Filesystem Type Size Used Avail Use% Mounted on  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 =**

**124**

**SPECfp\_base2006 =**

**116**

**CPU2006 license:** 9019

**Test date:** Jul-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
/dev/sda3      xfs  1.8T  11G  1.8T  1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M4.2.0.10c.0.032320160820 03/23/2016

Memory:

```
16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh"

OMP\_NUM\_THREADS = "40"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 =**

**124**

**SPECfp\_base2006 =**

**116**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:**

Jul-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 =**

**124**

**SPECfp\_base2006 =**

**116**

**CPU2006 license:** 9019

**Test date:** Jul-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2698 v4, 2.20 GHz)

**SPECfp2006 =**

**124**

**SPECfp\_base2006 =**

**116**

**CPU2006 license:** 9019

**Test date:** Jul-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 24 13:15:13 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 August 2016.