



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp®2006 = 115

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp_base2006 = 107

CPU2006 license: 9046


Test date: May-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: May-2016

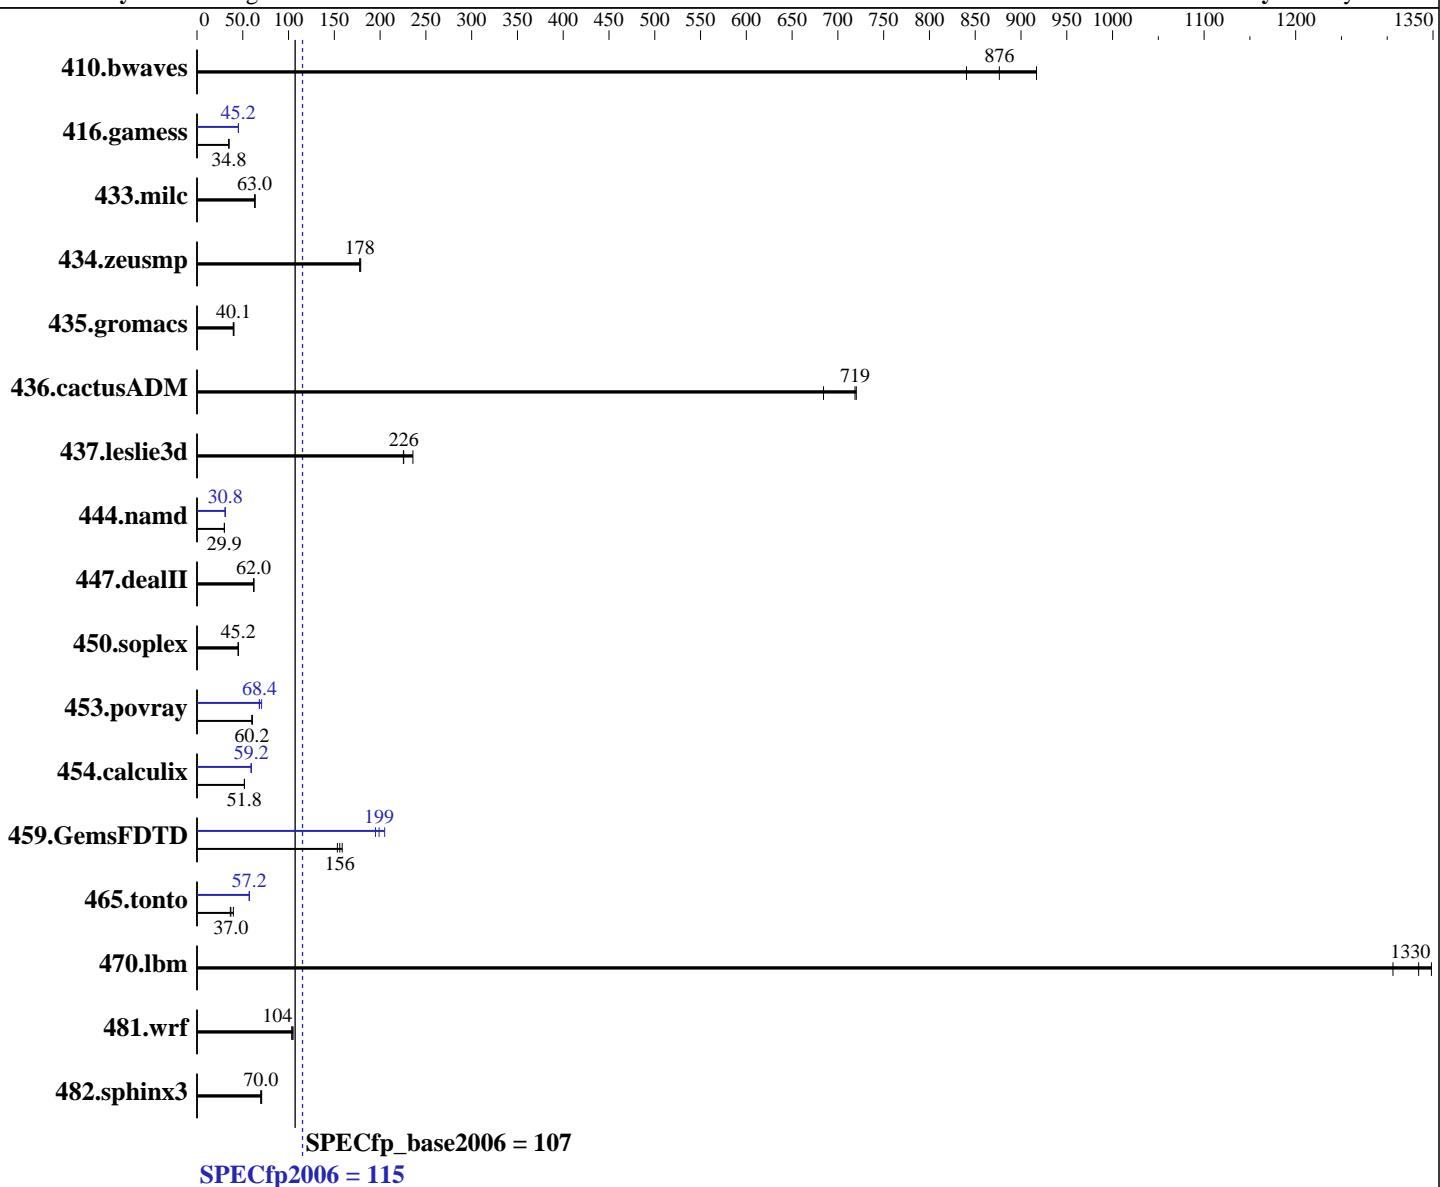

Hardware

CPU Name: Intel Xeon E7-8890 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: NeoKylin Linux Advanced Server release V7Update2 (Potassium)
 Compiler: 3.10.0-327.el7.x86_64
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 System State: Yes
 xfs
 Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp2006 = 115

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp_base2006 = 107

CPU2006 license: 9046

Test date: May-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: May-2016

L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 2 x 1 TB SATA, 7200 RPM, RAID 1
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	16.2	840	14.8	917	<u>15.5</u>	<u>876</u>	16.2	840	14.8	917	<u>15.5</u>	<u>876</u>
416.gamess	562	34.8	564	34.7	<u>563</u>	<u>34.8</u>	<u>433</u>	<u>45.2</u>	433	45.2	432	45.3
433.milc	144	63.6	146	63.0	<u>146</u>	<u>63.0</u>	144	63.6	146	63.0	<u>146</u>	<u>63.0</u>
434.zeusmp	51.2	178	<u>51.2</u>	<u>178</u>	50.9	179	51.2	178	<u>51.2</u>	<u>178</u>	50.9	179
435.gromacs	180	39.6	<u>178</u>	<u>40.1</u>	177	40.3	180	39.6	<u>178</u>	<u>40.1</u>	177	40.3
436.cactusADM	17.5	684	<u>16.6</u>	<u>719</u>	16.6	720	<u>17.5</u>	<u>684</u>	<u>16.6</u>	<u>719</u>	16.6	720
437.leslie3d	41.7	225	<u>41.6</u>	<u>226</u>	39.9	236	41.7	225	<u>41.6</u>	<u>226</u>	39.9	236
444.namd	268	29.9	<u>268</u>	<u>29.9</u>	268	30.0	<u>260</u>	<u>30.8</u>	260	30.8	260	30.8
447.dealII	<u>185</u>	<u>62.0</u>	184	62.0	185	62.0	<u>185</u>	<u>62.0</u>	184	62.0	185	62.0
450.soplex	<u>185</u>	<u>45.2</u>	184	45.3	186	44.9	<u>185</u>	<u>45.2</u>	184	45.3	186	44.9
453.povray	<u>88.3</u>	<u>60.2</u>	88.0	60.5	88.8	59.9	<u>75.4</u>	<u>70.6</u>	<u>78.2</u>	<u>68.0</u>	<u>77.8</u>	<u>68.4</u>
454.calculix	159	51.8	<u>159</u>	<u>51.8</u>	159	51.8	<u>139</u>	<u>59.2</u>	139	59.2	139	59.3
459.GemsFDTD	<u>68.0</u>	<u>156</u>	66.9	159	69.2	153	<u>51.8</u>	<u>205</u>	54.4	195	<u>53.3</u>	<u>199</u>
465.tonto	<u>266</u>	<u>37.0</u>	270	36.4	248	39.7	<u>172</u>	<u>57.2</u>	173	57.0	172	57.3
470.lbm	10.2	1350	10.5	1310	<u>10.3</u>	<u>1330</u>	10.2	1350	<u>10.5</u>	1310	<u>10.3</u>	<u>1330</u>
481.wrf	<u>107</u>	<u>104</u>	106	105	108	103	<u>107</u>	<u>104</u>	106	105	108	103
482.sphinx3	280	69.6	<u>278</u>	<u>70.0</u>	276	70.6	<u>280</u>	<u>69.6</u>	<u>278</u>	<u>70.0</u>	276	70.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

ACPI T-States set as "Disable"

Package C State limit set as "C0/C1 state"

Enhanced Halt State (C1E) set as "Disable"

Energy Performance BIAS setting. set as "Performance"

Sysinfo program /cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on I840G25 Fri May 20 00:17:02 2016

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp2006 =

115

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp_base2006 =

107

CPU2006 license: 9046

Test date: May-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: May-2016

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
        4 "physical id"s (chips)
        192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 24
    siblings   : 48
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
    27 28 29
    cache size : 30720 KB
```

```
From /proc/meminfo
    MemTotal:       1056727052 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
    NeoKylin Linux Advanced Server release V7Update2 (Potassium)
```

```
From /etc/*release* /etc/*version*
    neokylin-release: NeoKylin Linux Advanced Server release V7Update2
    (Potassium)
    os-release:
        NAME="NeoKylin Linux Advanced Server"
        VERSION="V7Update2 (Potassium)"
        ID="neokylin"
        ID_LIKE="fedora"
        VERSION_ID="V7Update2"
        PRETTY_NAME="NeoKylin Linux Advanced Server V7Update2 (Potassium)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:neokylin:enterprise_linux:V7Update2:GA:server"
    system-release: NeoKylin Linux Advanced Server release V7Update2 (Potassium)
    system-release-cpe: cpe:/o:neokylin:enterprise_linux:v7update2:ga:server
```

```
uname -a:
    Linux I840G25 3.10.0-327.el7.x86_64 #1 SMP Thu Nov 26 13:46:27 CST 2015
    x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 19 13:29
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp2006 =

115

SPECfp_base2006 =

107

CPU2006 license: 9046

Test date: May-2016

Test sponsor: Sugon

Hardware Availability: May-2016

Tested by: Sugon

Software Availability: May-2016

Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb1	xfs	836G	6.8G	830G	1%	/cpu2006

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 3.0 05/02/2016

Memory:

64x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz
32x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP_NUM_THREADS = "96"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp2006 =

115

SPECfp_base2006 =

107

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date:

May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Base Portability Flags (Continued)

```
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp2006 =

115

SPECfp_base2006 =

107

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date:

May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

Sugon I840-G25 (Intel Xeon E7-8890 v4)

SPECfp2006 =

115

SPECfp_base2006 =

107

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date:

May-2016

Hardware Availability: May-2016

Software Availability: May-2016

Peak Optimization Flags (Continued)

465.tonto (continued):

-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-BDW-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Nov 3 10:37:04 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 November 2016.