



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2017

Hardware Availability: Jun-2016

Software Availability: Sep-2016

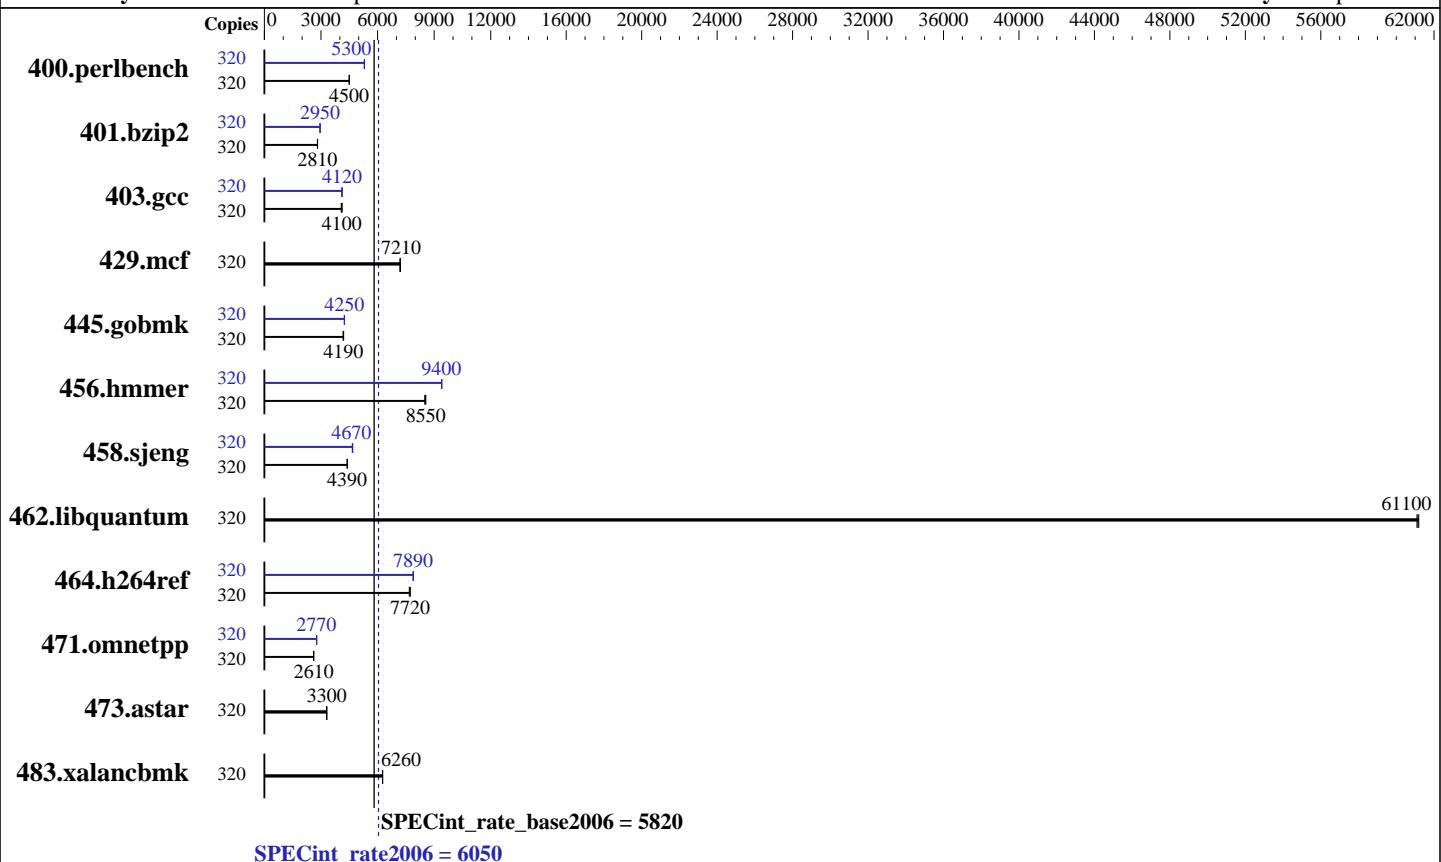

### Hardware

CPU Name:	Intel Xeon E7-8870 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	160 cores, 8 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	4,8 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	50 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

### Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) Kernel 3.12.49-11-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

CPU2006 license: 9017

Test date: Jan-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	320	<b>695</b>	<b>4500</b>	695	4500	694	4500	320	590	5300	589	5310	<b>590</b>	<b>5300</b>
401.bzip2	320	1099	2810	1094	2820	<b>1097</b>	<b>2810</b>	320	1048	2950	<b>1046</b>	<b>2950</b>	1045	2960
403.gcc	320	<b>629</b>	<b>4100</b>	632	4070	625	4120	320	625	4120	627	4110	<b>625</b>	<b>4120</b>
429.mcf	320	<b>405</b>	<b>7210</b>	404	7220	406	7180	320	<b>405</b>	<b>7210</b>	404	7220	406	7180
445.gobmk	320	799	4200	<b>802</b>	<b>4190</b>	804	4180	320	790	4250	793	4230	<b>790</b>	<b>4250</b>
456.hammer	320	<b>349</b>	<b>8550</b>	351	8500	349	8550	320	<b>318</b>	<b>9400</b>	317	9410	318	9390
458.sjeng	320	<b>882</b>	<b>4390</b>	880	4400	882	4390	320	<b>829</b>	<b>4670</b>	831	4660	826	4690
462.libquantum	320	<b>108</b>	<b>61100</b>	108	61200	109	61100	320	<b>108</b>	<b>61100</b>	108	61200	109	61100
464.h264ref	320	<b>917</b>	<b>7720</b>	916	7730	922	7680	320	<b>897</b>	<b>7890</b>	896	7900	899	7880
471.omnetpp	320	<b>765</b>	<b>2610</b>	765	2610	766	2610	320	<b>721</b>	<b>2770</b>	<b>722</b>	<b>2770</b>	723	2770
473.astar	320	<b>680</b>	<b>3300</b>	680	3300	680	3300	320	<b>680</b>	<b>3300</b>	680	3300	680	3300
483.xalancbmk	320	353	6260	352	6270	<b>352</b>	<b>6260</b>	320	353	6260	352	6270	<b>352</b>	<b>6260</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:

Memory Mode set to Independent

Operating Mode set to Maximum Performance

DCU Streamer Prefetcher set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on Draco-8S Wed Jan 25 17:53:20 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

**CPU2006 license:** 9017

**Test date:** Jan-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E7-8870 v4 @ 2.10GHz
  8 "physical id"s (chips)
  320 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 20
siblings : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 4: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 5: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 6: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 7: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 51200 KB
```

```
From /proc/meminfo
MemTotal:      1058535688 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux Draco-8S 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 25 17:52
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       btrfs  744G   31G  709G   5%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

**CPU2006 license:** 9017

**Test date:** Jan-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[A9E135LUS-3.11]- 11/18/2016

Memory:

47x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
17x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
128x NO DIMM Unknown

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jan-2017

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmr: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jan-2017

**Hardware Availability:** Jun-2016

**Software Availability:** Sep-2016

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3950 X6  
(Intel Xeon E7-8870 v4, 2.10 GHz)

**SPECint\_rate2006 = 6050**

**SPECint\_rate\_base2006 = 5820**

**CPU2006 license:** 9017

**Test date:** Jan-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-D.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 7 16:14:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 March 2017.