



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint®2006 = 70.4

SPECint_base2006 = 68.0

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

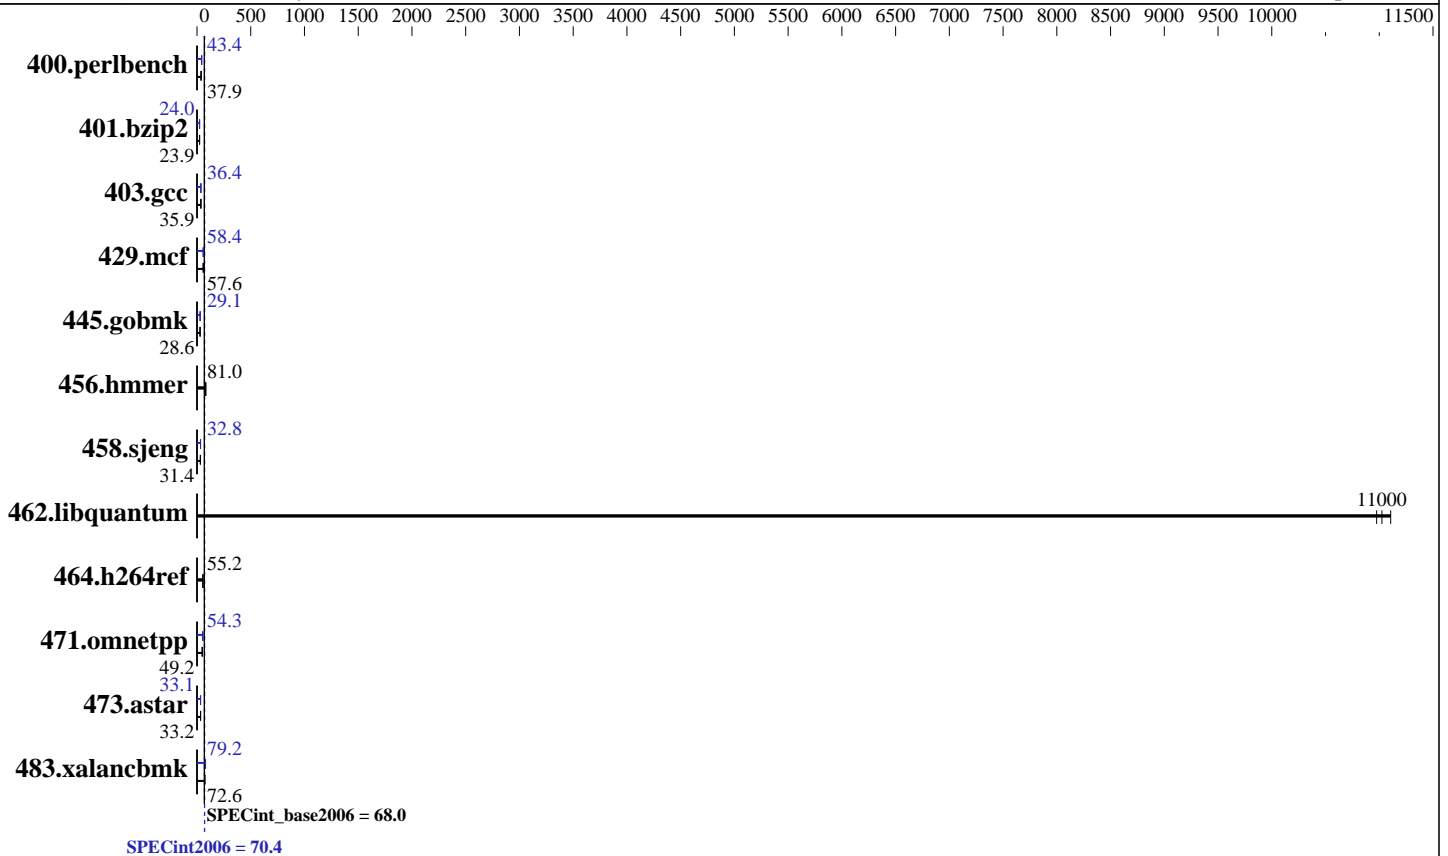

Hardware

CPU Name: Intel Xeon E7-8880 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 88 cores, 4 chips, 22 cores/chip
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 55 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SAS SSD
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint2006 = **70.4**

SPECint_base2006 = **68.0**

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Apr-2017
Hardware Availability: Apr-2016
Software Availability: Sep-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	258	37.9	<u>258</u>	<u>37.9</u>	258	37.9	<u>225</u>	<u>43.4</u>	<u>225</u>	<u>43.4</u>	224	43.6
401.bzip2	<u>403</u>	<u>23.9</u>	405	23.8	402	24.0	<u>402</u>	<u>24.0</u>	402	24.0	402	24.0
403.gcc	225	35.8	224	35.9	<u>224</u>	<u>35.9</u>	222	36.3	221	36.4	<u>221</u>	<u>36.4</u>
429.mcf	152	59.9	158	57.5	<u>158</u>	<u>57.6</u>	157	58.0	<u>156</u>	<u>58.4</u>	155	58.8
445.gobmk	367	28.6	370	28.4	<u>367</u>	<u>28.6</u>	<u>360</u>	<u>29.1</u>	361	29.1	360	29.1
456.hammer	<u>115</u>	<u>81.0</u>	115	80.9	115	81.0	<u>115</u>	<u>81.0</u>	115	80.9	115	81.0
458.sjeng	380	31.9	387	31.2	<u>385</u>	<u>31.4</u>	<u>368</u>	<u>32.8</u>	368	32.8	369	32.8
462.libquantum	1.87	11100	<u>1.88</u>	<u>11000</u>	1.89	11000	1.87	11100	<u>1.88</u>	<u>11000</u>	1.89	11000
464.h264ref	<u>401</u>	<u>55.2</u>	402	55.1	401	55.2	<u>401</u>	<u>55.2</u>	402	55.1	401	55.2
471.omnetpp	127	49.2	<u>127</u>	<u>49.2</u>	130	48.1	<u>115</u>	<u>54.3</u>	115	54.2	114	54.7
473.astar	<u>212</u>	<u>33.2</u>	212	33.2	211	33.3	<u>212</u>	<u>33.1</u>	212	33.1	213	33.0
483.xalancbmk	94.8	72.8	96.0	71.9	<u>95.0</u>	<u>72.6</u>	87.1	79.2	86.8	79.5	<u>87.1</u>	<u>79.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

```

Intel Hyper-Threading Technology option set to Disabled
CPU performance set to Enterprise
Power Technology set to Energy Efficient
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Home Directory Snoop with OSB
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-3y2r Wed Apr 19 20:52:20 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E7-8880 v4 @ 2.20GHz
4 "physical id"s (chips)

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint2006 = 70.4

SPECint_base2006 = 68.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

Platform Notes (Continued)

88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 22
siblings  : 22
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
```

cache size : 56320 KB

From /proc/meminfo

```
MemTotal:      1058506896 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux linux-3y2r 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 3 01:10

SPEC is set to: /opt/cpu2006-1.2

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdal        xfs       373G      23G  351G   6% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint2006 = 70.4

SPECint_base2006 = 68.0

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Apr-2017
Hardware Availability: Apr-2016
Software Availability: Sep-2016

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. EXM4.3.1.2c.0.080220161434 08/02/2016

Memory:

32x 0xCE00 M393A4K40BB0-CPB 32 GB 2 rank 2133 MHz, configured at 1600 MHz
64x NO DIMM NO DIMM 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "88"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 70.4

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint_base2006 = 68.0

CPU2006 license: 9019

Test date: Apr-2017

Test sponsor: Cisco Systems

Hardware Availability: Apr-2016

Tested by: Cisco Systems

Software Availability: Sep-2016

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint2006 = 70.4

SPECint_base2006 = 68.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Apr-2017

Hardware Availability: Apr-2016

Software Availability: Sep-2016

Peak Optimization Flags

C benchmarks:

- 400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-prefetch
- 401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -auto-ilp32 -qopt-prefetch
- 403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32
- 429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32
- 445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)
- 456.hmmer: basepeak = yes
- 458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4
- 462.libquantum: basepeak = yes
- 464.h264ref: basepeak = yes

C++ benchmarks:

- 471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmarheap
- 473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmarheap64
- 483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint2006 = 70.4

SPECint_base2006 = 68.0

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Apr-2017
Hardware Availability: Apr-2016
Software Availability: Sep-2016

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed May 31 12:00:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 May 2017.