



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®_rate2006 = 208

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = 201

CPU2006 license: 9006


Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

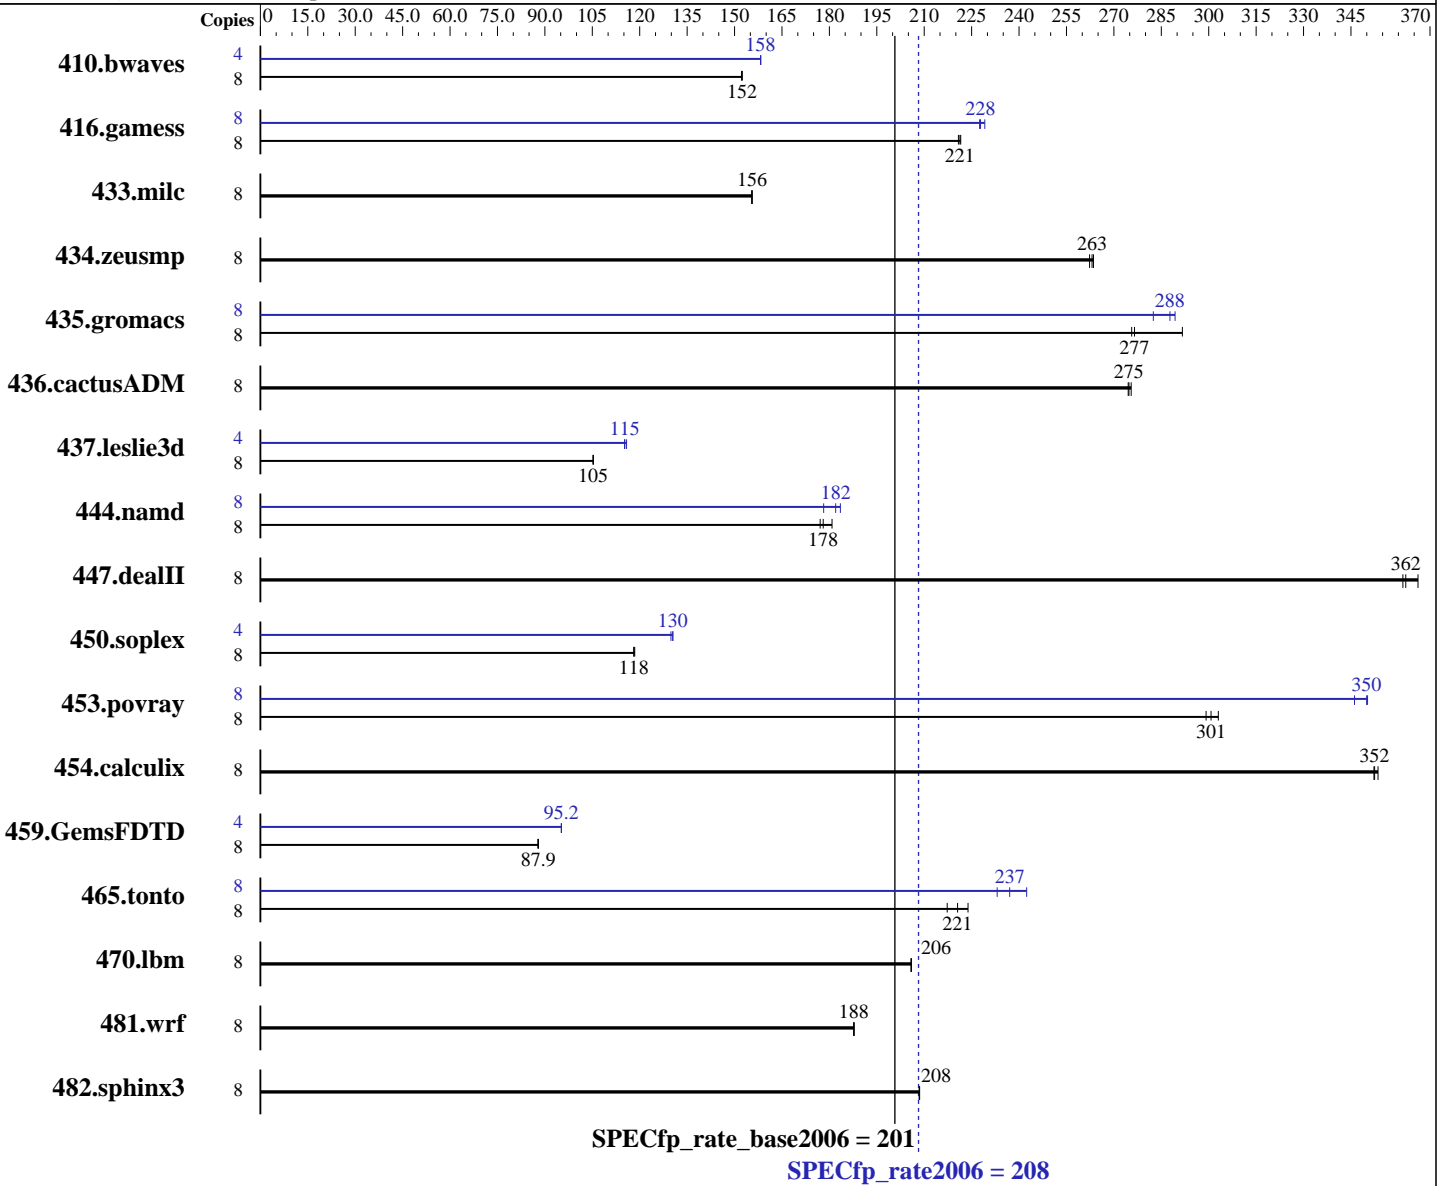

Hardware

CPU Name: Intel Xeon E3-1230 v6
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 Kernel 3.10.0-514.6.1.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **208**

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = **201**

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2400T-E)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	713	152	<u>714</u>	<u>152</u>	714	152	4	344	158	<u>344</u>	<u>158</u>	343	158
416.gamess	8	709	221	707	222	<u>708</u>	<u>221</u>	8	688	228	<u>688</u>	<u>228</u>	684	229
433.milc	8	472	155	472	156	<u>472</u>	<u>156</u>	8	472	155	472	156	<u>472</u>	<u>156</u>
434.zeusmp	8	276	264	278	262	<u>277</u>	<u>263</u>	8	276	264	278	262	<u>277</u>	<u>263</u>
435.gromacs	8	207	276	196	292	<u>207</u>	<u>277</u>	8	202	282	<u>199</u>	<u>288</u>	197	289
436.cactusADM	8	347	275	<u>348</u>	<u>275</u>	348	275	8	347	275	<u>348</u>	<u>275</u>	348	275
437.leslie3d	8	714	105	<u>714</u>	<u>105</u>	714	105	4	326	115	325	116	<u>326</u>	<u>115</u>
444.namd	8	<u>360</u>	<u>178</u>	355	181	362	177	8	360	178	<u>353</u>	<u>182</u>	350	183
447.dealII	8	<u>253</u>	<u>362</u>	253	361	250	366	8	<u>253</u>	<u>362</u>	253	361	250	366
450.soplex	8	563	118	565	118	<u>565</u>	<u>118</u>	4	<u>256</u>	<u>130</u>	256	130	257	130
453.povray	8	<u>142</u>	<u>301</u>	142	299	140	303	8	122	350	123	346	<u>122</u>	<u>350</u>
454.calculix	8	187	352	<u>187</u>	<u>352</u>	187	354	8	187	352	<u>187</u>	<u>352</u>	187	354
459.GemsFDTD	8	<u>966</u>	<u>87.9</u>	965	87.9	967	87.8	4	<u>446</u>	<u>95.2</u>	446	95.2	446	95.2
465.tonto	8	<u>357</u>	<u>221</u>	352	224	362	217	8	<u>332</u>	<u>237</u>	338	233	325	242
470.lbm	8	<u>534</u>	<u>206</u>	534	206	534	206	8	<u>534</u>	<u>206</u>	534	206	534	206
481.wrf	8	<u>476</u>	<u>188</u>	476	188	476	188	8	<u>476</u>	<u>188</u>	476	188	476	188
482.sphinx3	8	748	209	748	208	<u>748</u>	<u>208</u>	8	748	209	748	208	<u>748</u>	<u>208</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 208

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = 201

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Platform Notes (Continued)

DCU Streamer Prefetcher: Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 208

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = 201

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Jan-2017

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 208

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = 201

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -fno-alias -auto-ilp32
 -qopt-mem-layout-trans=3

447.dealIII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 208

Express5800/R110i-1 (Intel Xeon E3-1230 v6)

SPECfp_rate_base2006 = 201

CPU2006 license: 9006

Test date: Mar-2017

Test sponsor: NEC Corporation

Hardware Availability: Apr-2017

Tested by: NEC Corporation

Software Availability: Jan-2017

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-110i-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:18 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 May 2017.