



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECfp®2006 = 146**

**SPECfp\_base2006 = 140**

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Aug-2017

Hardware Availability: Aug-2017

Software Availability: Nov-2016

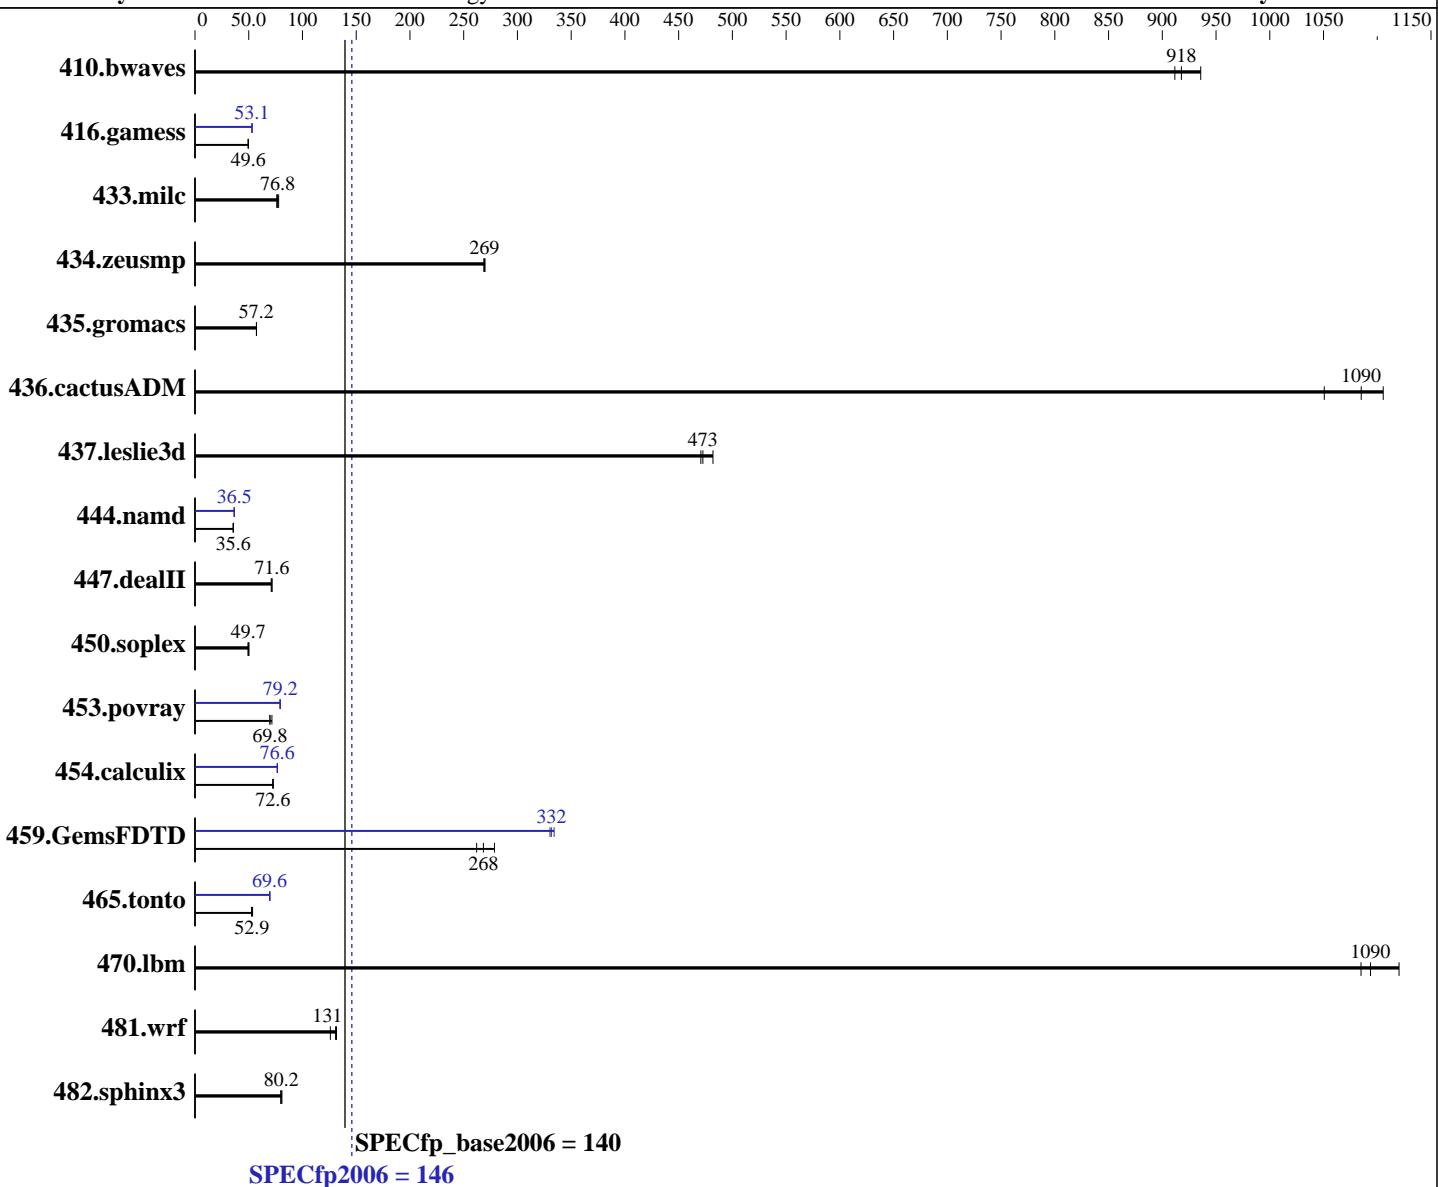

Hardware		Software	
CPU Name:	Intel Xeon Gold 6126	Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz	Compiler:	Kernel 4.4.21-69-default
CPU MHz:	2600		C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
FPU:	Integrated		Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip	Auto Parallel:	Yes
CPU(s) orderable:	1,2 chips	File System:	btrfs
Primary Cache:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (multi-user)
Secondary Cache:	1 MB I+D on chip per core		

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECfp2006 = 146**

**SPECfp\_base2006 = 140**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

L3 Cache: 19.25 MB I+D on chip per chip  
Other Cache: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	<b>14.8</b>	<b>918</b>	14.5	936	14.9	912	<b>14.8</b>	<b>918</b>	14.5	936	14.9	912
416.gamess	394	49.7	<b>394</b>	<b>49.6</b>	396	49.4	<b>369</b>	<b>53.1</b>	<b>369</b>	<b>53.1</b>	369	53.0
433.milc	<b>119</b>	<b>76.8</b>	118	77.8	121	76.0	<b>119</b>	<b>76.8</b>	118	77.8	121	76.0
434.zeusmp	33.7	270	<b>33.8</b>	<b>269</b>	33.9	269	<b>33.7</b>	<b>270</b>	<b>33.8</b>	<b>269</b>	33.9	269
435.gromacs	125	57.2	125	57.1	<b>125</b>	<b>57.2</b>	<b>125</b>	<b>57.2</b>	125	57.1	<b>125</b>	<b>57.2</b>
436.cactusADM	<b>11.0</b>	<b>1090</b>	10.8	1110	11.4	1050	<b>11.0</b>	<b>1090</b>	10.8	1110	11.4	1050
437.leslie3d	<b>19.9</b>	<b>473</b>	20.0	471	19.5	482	<b>19.9</b>	<b>473</b>	20.0	471	19.5	482
444.namd	225	35.6	<b>225</b>	<b>35.6</b>	225	35.6	<b>220</b>	<b>36.5</b>	220	36.5	220	36.5
447.dealII	<b>160</b>	<b>71.6</b>	160	71.6	161	70.9	<b>160</b>	<b>71.6</b>	160	71.6	161	70.9
450.soplex	169	49.3	166	50.2	<b>168</b>	<b>49.7</b>	<b>169</b>	<b>49.3</b>	166	50.2	<b>168</b>	<b>49.7</b>
453.povray	<b>76.3</b>	<b>69.8</b>	76.4	69.7	74.3	71.6	<b>67.1</b>	<b>79.3</b>	<b>67.1</b>	<b>79.2</b>	67.2	79.2
454.calculix	113	72.8	<b>114</b>	<b>72.6</b>	114	72.3	<b>108</b>	<b>76.7</b>	<b>108</b>	<b>76.6</b>	108	76.5
459.GemsFDTD	40.5	262	38.1	279	<b>39.5</b>	<b>268</b>	31.8	334	<b>32.0</b>	<b>332</b>	32.1	330
465.tonto	184	53.6	<b>186</b>	<b>52.9</b>	187	52.6	<b>141</b>	<b>69.6</b>	141	69.6	142	69.5
470.lbm	12.7	1080	12.3	1120	<b>12.6</b>	<b>1090</b>	12.7	1080	12.3	1120	<b>12.6</b>	<b>1090</b>
481.wrf	88.7	126	84.9	132	<b>85.4</b>	<b>131</b>	88.7	126	84.9	132	<b>85.4</b>	<b>131</b>
482.sphinx3	244	79.7	<b>243</b>	<b>80.2</b>	241	80.9	<b>244</b>	<b>79.7</b>	<b>243</b>	<b>80.2</b>	241	80.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

Per Core P-state set to Disable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on ST550 Fri Aug 11 19:21:39 2017

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp2006 =

146

SPECfp\_base2006 =

140

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6126 CPU @ 2.60GHz
        2 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 12
    siblings   : 12
    physical 0: cores 0 1 2 4 5 6 8 9 10 11 13 14
    physical 1: cores 0 1 2 4 5 6 8 9 10 11 13 14
cache size : 19712 KB
```

```
From /proc/meminfo
MemTotal:      395883764 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux ST550 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 11 19:18
```

```
SPEC is set to: /home/cpu2006-1.2-ic17.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        btrfs  744G  95G  648G  13% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECfp2006 = 146**

**SPECfp\_base2006 = 140**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[00E105R-1.00]- 04/27/2017

Memory:

12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2  
Transparent Huge Pages enabled by default.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECfp2006 =**

**146**

**SPECfp\_base2006 =**

**140**

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

SPECfp2006 =

146

SPECfp\_base2006 =

140

CPU2006 license: 9017

Test date: Aug-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Nov-2016

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3  
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST550  
(2.60 GHz, Intel Xeon Gold 6126)

**SPECfp2006 =** 146

**SPECfp\_base2006 =** 140

**CPU2006 license:** 9017

**Test date:** Aug-2017

**Test sponsor:** Lenovo Global Technology

**Hardware Availability:** Aug-2017

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:04:07 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 September 2017.