



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 26.1

MPI2007 license: 13


Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

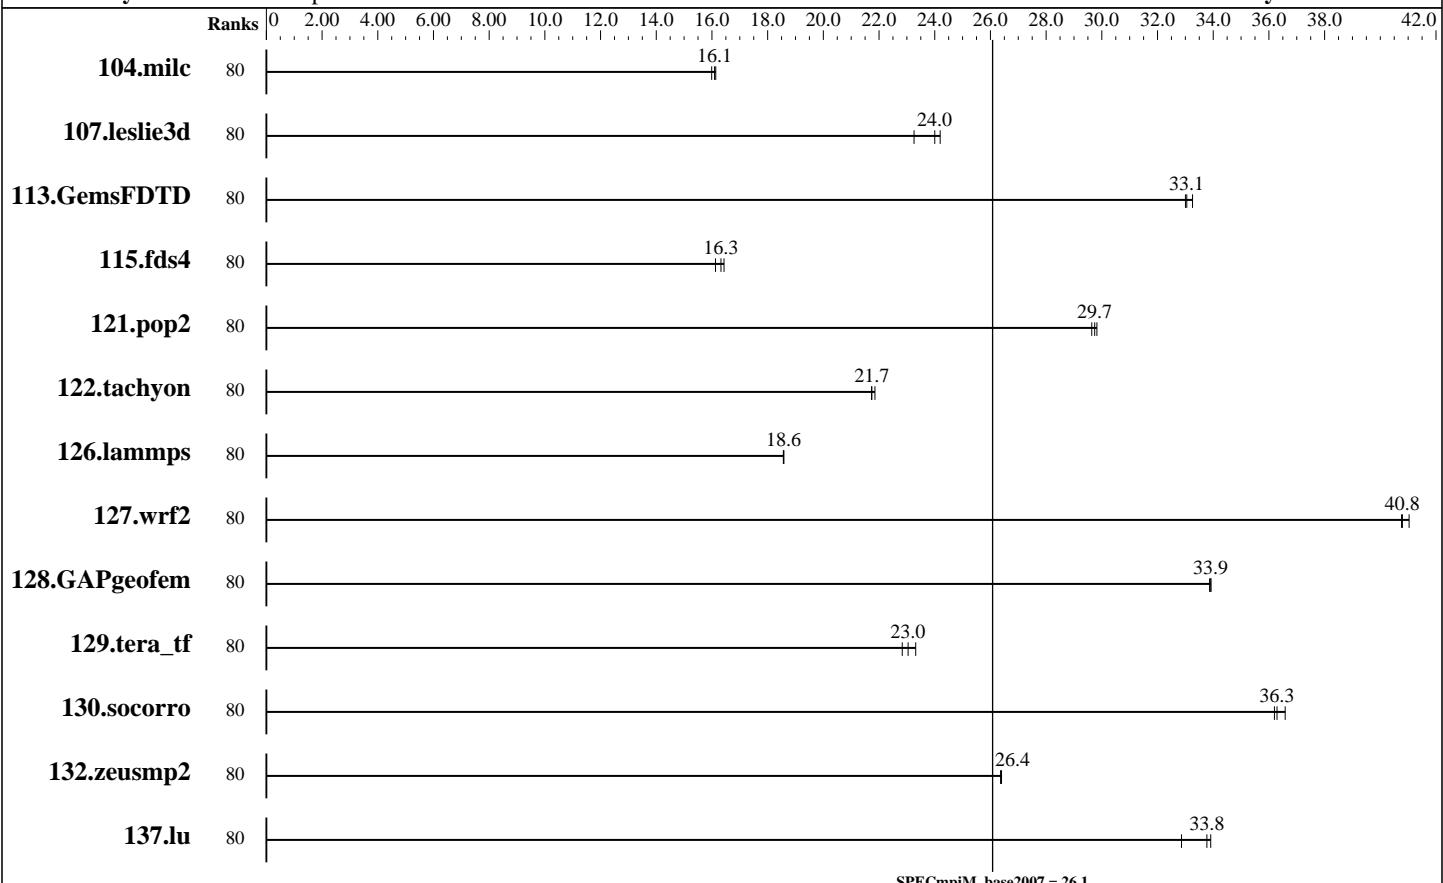

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	80	97.9	16.0	97.2	16.1	97.0	16.1									
107.leslie3d	80	224	23.3	216	24.2	217	24.0									
113.GemsFDTD	80	191	33.0	190	33.3	191	33.1									
115.fds4	80	119	16.4	120	16.3	121	16.1									
121.pop2	80	138	29.8	139	29.7	139	29.6									
122.tachyon	80	129	21.7	129	21.7	128	21.9									
126.lammps	80	157	18.6	157	18.6	157	18.6									
127.wrf2	80	191	40.8	190	41.0	191	40.8									
128.GAPgeomfem	80	60.9	33.9	60.9	33.9	61.0	33.9									
129.tera_tf	80	119	23.3	121	22.8	120	23.0									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

[SPECmpIM_peak2007 = Not Run](#)

[SPECmpIM_base2007 = 26.1](#)

MPI2007 license: 13

Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	80	105	36.2	<u>105</u>	<u>36.3</u>	104	36.6									
132.zeusmp2	80	118	26.4	<u>118</u>	<u>26.4</u>	118	26.4									
137.lu	80	112	32.9	108	33.9	<u>109</u>	<u>33.8</u>									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: Intel Server System R2208WFTZS
 Interconnect: Intel Omni-Path 100 series
 File Server Node: Lustre FS
 Total Compute Nodes: 2
 Total Chips: 4
 Total Cores: 80
 Total Threads: 160
 Total Memory: 384 GB
 Base Ranks Run: 80
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2018 for Linux Version 18.0.0 Build 20170811
 C++ Compiler: Intel C++ Composer XE 2018 for Linux Version 18.0.0 Build 20170811
 Fortran Compiler: Intel Fortran Composer XE 2018 for Linux Version 18.0.0 Build 20170811
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 MPI Library: Intel MPI Library 2019 Build 20180829
 Other MPI Info: libfabric-1.6.1
 Pre-processors: No
 Other Software: None

Node Description: Intel Server System R2208WFTZS

Hardware

Number of nodes: 2
 Uses of the node: Compute
 Vendor: Intel
 Model: Intel Server System R2208WFTZS
 CPU Name: Intel Xeon Gold 6148
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 40
 Cores per chip: 20
 Threads per core: 2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.7 GHz 2400
 CPU MHz: 32 KB I + 32 KB D on chip per core
 Primary Cache: 1 MB I+D on chip per core
 Secondary Cache: 27.5 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: 192 GB (16 x 12 GB 2Rx4 DDR4-2666)
 Memory: ATA INTEL SSDSC2BA80
 Disk Subsystem: None
 Other Hardware: Intel Omni-Path Edge Switch 100 series
 Adapter: 1
 Number of Adapters: PCI-Express x16
 Slot Type: 12.5 GB/s
 Data Rate: 1
 Ports Used:

Software

Adapter: Intel Omni-Path Edge Switch 100 series
 Adapter Driver: IFS 10.7
 Adapter Firmware: 1.26.1
 Operating System: Oracle Linux Server release 7.4
 Local File System: Linux/xfs
 Shared File System: Lustre FS
 System State: Multi-User
 Other Software: IBM Platform LSF Standard 9.1.1.1

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

[SPECmpIM_peak2007 = Not Run](#)

[SPECmpIM_base2007 = 26.1](#)

MPI2007 license: 13

Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

Node Description: Intel Server System R2208WFTZS

Interconnect Type: Intel Omni-Path Fabric 100 series

Node Description: Lustre FS

Hardware

Number of nodes: 11
 Uses of the node: Fileserver
 Vendor: Intel
 Model: Intel Server System R2208GZ4GC4
 CPU Name: Intel Xeon E5-2680
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 16
 Cores per chip: 8
 Threads per core: 2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.5 GHz
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 2 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 64 GB per node (8 x 8 GB 1600MHz Reg ECC DDR3)
 Disk Subsystem: 136 TB 3 RAID with 8 SAS/SATA
 Other Hardware:
 Adapter: Intel Omni-Path Fabric Adapter 100 series
 Number of Adapters: 1
 Slot Type: PCI-Express x16
 Data Rate: 12.5 GB/s
 Ports Used: 1
 Interconnect Type: Intel Omni-Path Fabric 100 series

Software

Adapter: Intel Omni-Path Fabric Adapter 100 series
 Adapter Driver: IFS 10.7
 Adapter Firmware: 1.26.1
 Operating System: Redhat Enterprise Linux Server Release 7.4
 Local File System: None
 Shared File System: Lustre FS
 System State: Multi-User
 Other Software: None

Interconnect Description: Intel Omni-Path 100 series

Hardware

Vendor: Intel
 Model: Intel Omni-Path Fabric 100 series
 Switch Model: Intel Omni-Path Edge Switch 100 series
 Number of Switches: 24
 Number of Ports: 48
 Data Rate: 12.5 GB/s
 Firmware: 1.26.1
 Topology: Fat tree
 Primary Use: MPI and I/O traffic

Software



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 26.1

MPI2007 license: 13

Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

Submit Notes

The config file option 'submit' was used.

General Notes

130.socorro (base): "nullify_ptrs" src.alt was used.
129.tera_tf (base): "add_rank_support" src.alt was used.
143.dleslie (base): "integer_overflow" src.alt was used.

MPI startup command:

```
mpiexec.hydra command was used to start MPI jobs.
export I_MPI_FABRICS=shm:ofi
export FI_PSM2_INJECT_SIZE=8192
export I_MPI_PIN_DOMAIN=core
export I_MPI_PIN_ORDER=bunch
export FI_PSM2_DELAY=0
export FI_PSM2_LAZY_CONN=1
export I_MPI_COMPATIBILITY=3
```

Spectre & Meltdown:

```
Kernel: 3.10.0-862.11.6.el7.crt1.x86_64
Microcode: 0x200004d
l1tf: Mitigation: PTE Inversion
meltdown: Mitigation: PTI
spec_store_bypass: Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1: Mitigation: Load fences, __user pointer sanitization
spectre_v2: Mitigation: IBRS (kernel)
```

BIOS settings:

```
Intel Hyper-Threading Technology (SMT) = Enabled (default is Enabled)
Intel Turbo Boost Technology (Turbo) = Enabled (default is Enabled)
```

RAM configuration:

Compute nodes have 2x16-GB RDIMM on each memory channel.

Network:

Endeavour Omni-Path Fabric consists of 48-port switches = 24 core switches connected to each leaf of the rack switch.

HFI driver parameters:

```
cache_size = 1024
rcvhdrcnt = 4096
```

Job placement:

Each MPI job was assigned to a topologically compact set of nodes, i.e. the minimal needed number of leaf switches was used for each job = 1 switch for 40/80/160/320/640 ranks, 2 switches for 1280 and 1980 ranks.

IBM Platform LSF was used for job submission. It has no impact on performance. Information can be found at: <http://www.ibm.com>

Base Compiler Invocation

C benchmarks:
 mpiicc

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 26.1

MPI2007 license: 13

Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

Base Compiler Invocation (Continued)

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:

mpiifort

Benchmarks using both Fortran and C:

mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG

126.lammps: -DMPICH_IGNORE_CXX_SEEK

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX

130.socorro: -assume nostd_intent_in

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX512 -no-prec-div -ipo

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX512 -no-prec-div -ipo

Fortran benchmarks:

-O3 -xCORE-AVX512 -no-prec-div -ipo

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX512 -no-prec-div -ipo

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20190110.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/EM64T_Intel140_flags.20190110.xml



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Intel Corporation

Endeavor (Intel Xeon Gold 6148, 2.40 GHz,
DDR4-2666 MHz, SMT on, Turbo on)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 26.1

MPI2007 license: 13

Test date: Aug-2018

Test sponsor: Intel Corporation

Hardware Availability: Aug-2018

Tested by: Intel Corporation

Software Availability: Nov-2018

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Thu Jan 10 13:17:49 2019 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 10 January 2019.