



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 19.4

MPI2007 license: 27


Test date: Jan-2019

Test sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

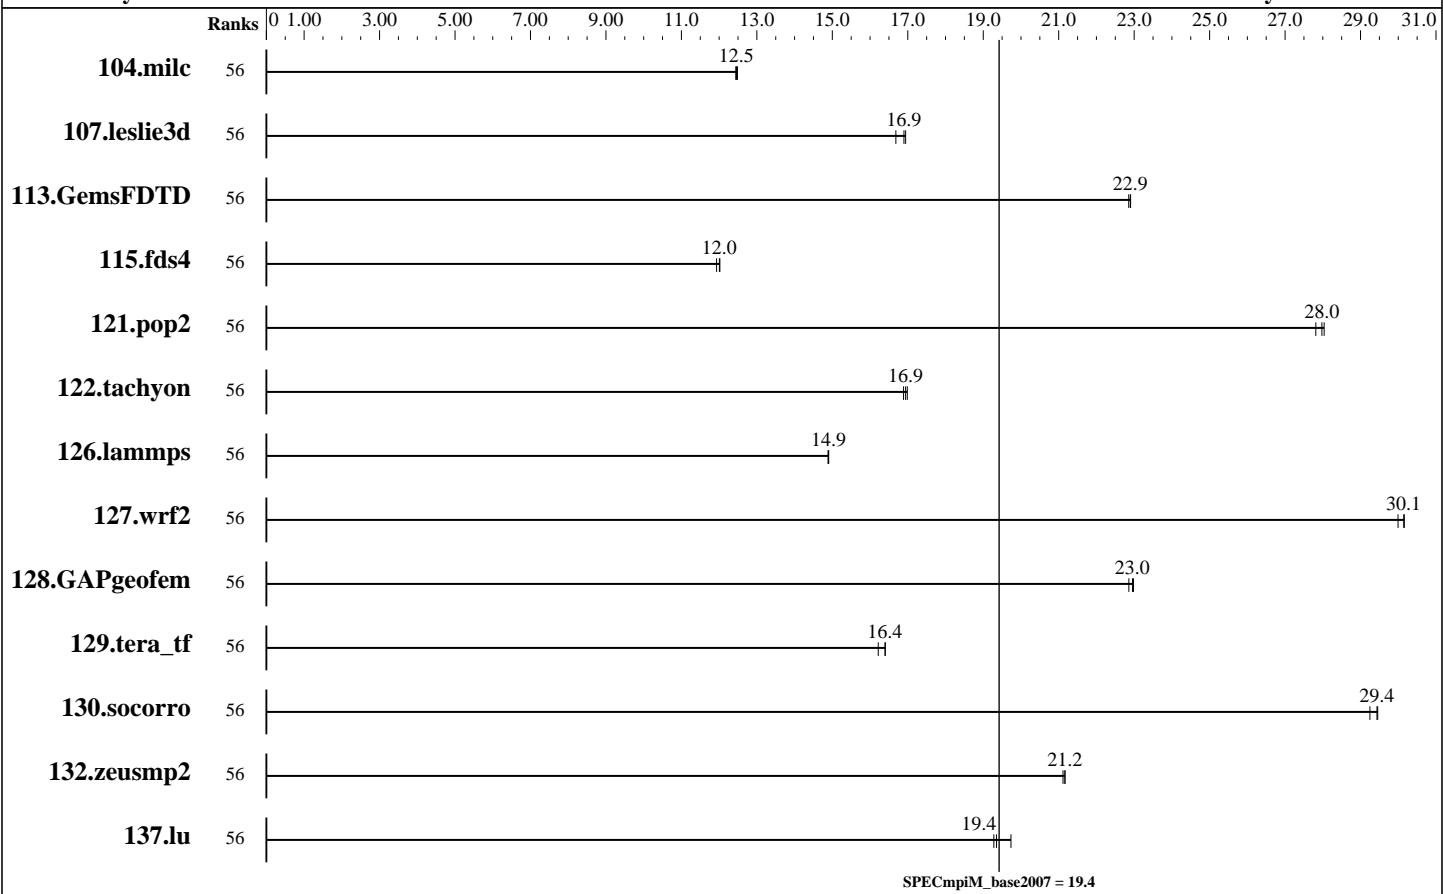

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	56	126	12.4	125	12.5	<u>126</u>	<u>12.5</u>									
107.leslie3d	56	313	16.7	<u>309</u>	<u>16.9</u>	308	16.9									
113.GemsFDTD	56	275	22.9	276	22.9	275	22.9									
115.fds4	56	162	12.0	164	11.9	<u>162</u>	<u>12.0</u>									
121.pop2	56	148	27.8	<u>148</u>	<u>28.0</u>	147	28.0									
122.tachyon	56	<u>165</u>	<u>16.9</u>	165	17.0	166	16.9									
126.lammps	56	196	14.9	<u>196</u>	<u>14.9</u>	196	14.9									
127.wrf2	56	260	30.0	<u>259</u>	<u>30.1</u>	258	30.2									
128.GAPgeomfem	56	89.9	23.0	<u>90.0</u>	<u>23.0</u>	90.3	22.9									
129.tera_tf	56	169	16.4	169	16.4	171	16.2									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

SPECmpiM_peak2007 = Not Run

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

SPECmpiM_base2007 = 19.4

MPI2007 license: 27

Test date: Jan-2019

Test sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	56	131	29.2	130	29.5	<u>130</u>	<u>29.4</u>									
132.zeusmp2	56	147	21.1	147	21.2	<u>147</u>	<u>21.2</u>									
137.lu	56	191	19.3	<u>190</u>	<u>19.4</u>	186	19.7									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: Huawei 2288H V5
 File Server Node: Huawei 2288H V5
 Head Node: Huawei 2288H V5
 Total Compute Nodes: 1
 Total Chips: 2
 Total Cores: 56
 Total Threads: 56
 Total Memory: 768 GB
 Base Ranks Run: 56
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 C++ Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 Fortran Compiler: Intel C++ Composer XE 2018 for Linux, Version 18.0.5.274 Build 20180823
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 MPI Library: Intel MPI Library for Linux OS, Version 2018 Update 4 Build 20180823
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: Huawei 2288H V5

Hardware

Number of nodes: 1
 Uses of the node: head, compute, fileserver
 Vendor: Huawei
 Model: Huawei 2288H V5
 CPU Name: Intel Xeon Platinum 8280
 CPU(s) orderable: 1,2 chip
 Chips enabled: 2
 Cores enabled: 56
 Cores per chip: 28
 Threads per core: 1
 CPU Characteristics: None
 CPU MHz: 2700
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Disk Subsystem: 1 x 1200 GB 10K RPM SAS
 Other Hardware: None
 Adapter: N/A
 Number of Adapters: 0
 Slot Type: N/A
 Data Rate: N/A
 Ports Used: 0

Software

Adapter: N/A
 Adapter Driver: N/A
 Adapter Firmware: N/A
 Operating System: SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
 Local File System: xfs
 Shared File System: None
 System State: Multi-User, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 19.4

Test date: Jan-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Node Description: Huawei 2288H V5

Interconnect Type: N/A

Submit Notes

The config file option 'submit' was used.

General Notes

BIOS configuration:

Power Policy Set to Performance

Hyper-Threading Set to Disabled

XPT Prefetch Set to Enabled

Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,
that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
 mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:
 mpiifort

Benchmarks using both Fortran and C:
 mpiicc mpiifort

Base Portability Flags

121.pop2: -DSPEC_MPI_CASE_FLAG
126.lammps: -DMPICH_IGNORE_CXX_SEEK

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Huawei

Huawei 2288H V5 (Intel Xeon Platinum 8280 CPU, 2.70 GHz)

MPI2007 license: 27

Test sponsor: Huawei

Tested by: Huawei

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 19.4

Test date: Jan-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Portability Flags (Continued)

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX

Base Optimization Flags

C benchmarks:

-O3 -xCORE-AVX512 -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xCORE-AVX512 -no-prec-div

Fortran benchmarks:

-O3 -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xCORE-AVX512 -no-prec-div

The flags files that were used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.20190402.html

<http://www.spec.org/mpi2007/flags/Huawei-SPECmpI2007-Platform-Settings-SKL-V1.0.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/mpi2007/flags/Huawei_x86_64_Intel_linux.20190402.xml

<http://www.spec.org/mpi2007/flags/Huawei-SPECmpI2007-Platform-Settings-SKL-V1.0.xml>

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Tue Apr 2 18:30:35 2019 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 2 April 2019.