



SPEC® OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13


Test sponsor: Intel

Tested by: Intel

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

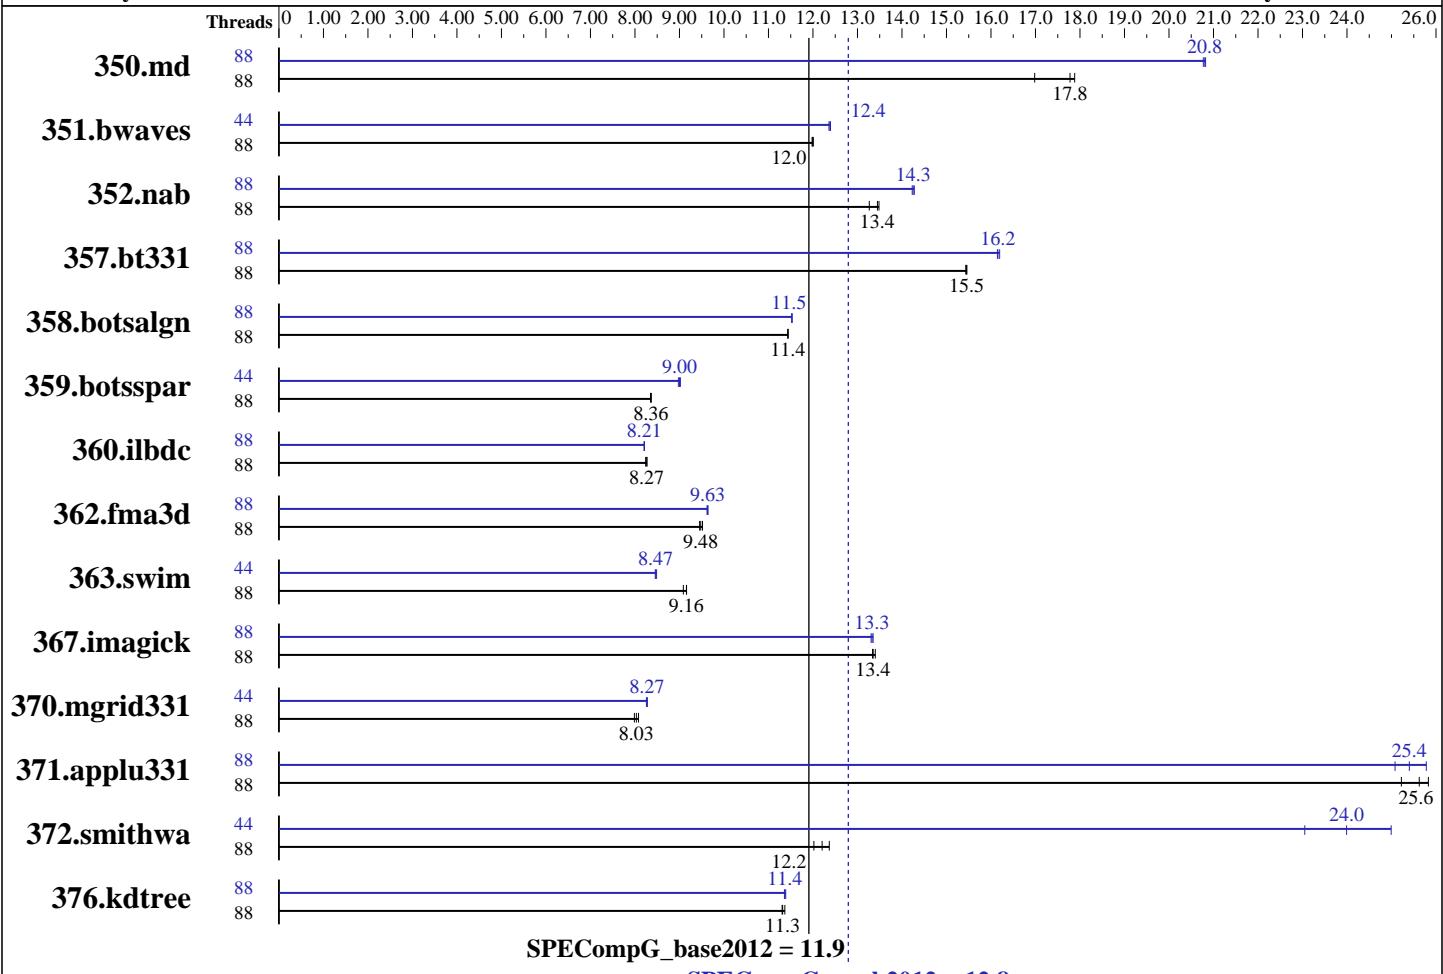

Hardware		Software	
CPU Name:	Intel Xeon E5-2699 v4	Operating System:	Red Hat Enterprise Linux Server release 6.7, Kernel 2.6.32-573.el6.x86_64
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz	Compiler:	C/C++/Fortran: Version 16.0.2.181 of Intel Composer XE for Linux Build 20160204
CPU MHz:	2200	Auto Parallel:	No
CPU MHz Maximum:	3600	File System:	Linux ext3
FPU:	Integrated	System State:	Default
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core	Base Pointers:	64-bit
CPU(s) orderable:	1,2 Chips	Peak Pointers:	64-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Other Software:	None
Secondary Cache:	256 KB I+D on chip per core		
L3 Cache:	55 MB I+D on chip per chip		
Other Cache:	None		
Memory:	128 GB (8 x 16 GB 1Rx8 PC4-2400T-R)		
Disk Subsystem:	NFS via 10GBPS Ethernet		
Other Hardware:	--		
Base Threads Run:	88		
Minimum Peak Threads:	44		

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13

Test date: May-2016

Test sponsor: Intel

Hardware Availability: Mar-2016

Tested by: Intel

Software Availability: Feb-2016

Maximum Peak Threads: 88

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
350.md	88	259	17.9	273	17.0	260	17.8	88	223	20.8	223	20.8	222	20.8
351.bwaves	88	378	12.0	377	12.0	378	12.0	44	366	12.4	366	12.4	367	12.4
352.nab	88	289	13.4	293	13.3	288	13.5	88	273	14.2	272	14.3	273	14.3
357.bt331	88	307	15.5	307	15.5	307	15.4	88	294	16.1	293	16.2	293	16.2
358.botsalgn	88	380	11.4	380	11.4	380	11.4	88	377	11.5	377	11.5	377	11.5
359.botsspar	88	628	8.36	628	8.36	629	8.35	44	583	9.00	582	9.02	585	8.98
360.ilbdc	88	432	8.24	431	8.27	430	8.27	88	434	8.21	433	8.21	434	8.21
362.fma3d	88	402	9.45	399	9.52	401	9.48	88	394	9.63	394	9.64	395	9.62
363.swim	88	499	9.09	495	9.16	495	9.16	44	534	8.49	535	8.47	536	8.46
367.imagick	88	527	13.3	527	13.4	525	13.4	88	526	13.4	527	13.3	528	13.3
370.mgrid331	88	553	7.99	547	8.08	550	8.03	44	535	8.26	534	8.28	534	8.27
371.applu331	88	240	25.2	235	25.8	237	25.6	88	242	25.1	239	25.4	235	25.8
372.smithwa	88	446	12.0	439	12.2	433	12.4	44	223	24.0	214	25.0	233	23.1
376.kdtree	88	398	11.3	398	11.3	396	11.4	88	396	11.4	396	11.4	395	11.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

```
Sysinfo program /root/pshelepu/SpecOMP/Docs/sysinfo
$Rev: 395 $ $Date:: 2012-07-25 ## $ 8f8c0fe9e19c658963a1e67685e50647
running on bdw-ep2 Mon May 30 05:09:36 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/omp2012/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 22
        siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
cache size : 56320 KB
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Platform Notes (Continued)

```
From /proc/meminfo
  MemTotal:       132020528 kB
  HugePages_Total:        0
  Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.7 (Santiago)
```

```
From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.7 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
  Linux bdw-ep2 2.6.32-573.el6.x86_64 #1 SMP Wed Jul 1 18:23:37 EDT 2015 x86_64
  x86_64 GNU/Linux
```

```
run-level 3 May 28 06:51
```

```
SPEC is set to: /root/pshalepu/SpecCOMP
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/mapper/vg_hswep2-lv_root
                ext4   50G   39G   8.3G  83%  /
```

Additional information from dmidecode:

```
  BIOS Intel Corporation GRRFSDP1.86B.0271.R00.1510301446 10/30/2015
```

Memory:

```
  8x 16 GB
  8x 0x11 Unknown 16 GB 2400 MHz 1 rank
  8x NO DIMM Unknown    2400 MHz 2 rank
  8x NO DIMM Unknown    2400 MHz 3 rank
```

(End of data from sysinfo program)

General Notes

```
=====
General base OMP Library Settings
  ENV_KMP_AFFINITY=compact,0
```

```
=====
General peak OMP Library Settings
  ENV_KMP_AFFINITY=compact,0
```

```
=====
General OMP Library Settings
  KMP_LIBRARY=turnaround
  KMP_STACKSIZE=256M
  KMP_BLOCKTIME=infinite
  OMP_DYNAMIC=FALSE
```

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

General Notes (Continued)

```
OMP_SCHEDULE=static
=====
351.bwaves:peak:
    ENV_KMP_AFFINITY=compact,1
    ENV_OMP_SCHEDULE=static,1

=====
359.botsspar:peak:
    ENV_KMP_AFFINITY=compact,1
    ENV_OMP_SCHEDULE=guided

=====
363.swim:peak:
    ENV_KMP_AFFINITY=compact,1

=====
370.mgrid331:peak:
    ENV_KMP_AFFINITY=compact,1

=====
372.smithwa:peak:
    ENV_OMP_SCHEDULE=static,1
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
350.md: -FR
357.bt331: -mcmodel=medium
363.swim: -mcmodel=medium
367.imagick: -std=c99
```

Base Optimization Flags

C benchmarks:

-O2 -fopenmp -ipo -xCORE-AVX2 -ansi-alias

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Base Optimization Flags (Continued)

C++ benchmarks:

-O2 -fopenmp -ipo -xCORE-AVX2 -ansi-alias

Fortran benchmarks:

-O2 -fopenmp -ipo -xCORE-AVX2 -align array64byte

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

350.md: -FR

357.bt331: -mcmode=medium

363.swim: -mcmode=medium

367.imagick: -std=c99

Peak Optimization Flags

C benchmarks:

352.nab: -O3 -fopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -opt-calloc -fp-model fast=2
-no-prec-div -no-prec-sqrt -ansi-alias

358.botsalgn: -O3 -fopenmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias

359.botsspar: Same as 358.botsalgn

367.imagick: -O3 -fopenmp -ipo -xCORE-AVX2 -ansi-alias

372.smithwa: -O3 -fopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=1
-ansi-alias

C++ benchmarks:

-O3 -fopenmp -ipo -xCORE-AVX2 -fno-alias -ansi-alias

Continued on next page



SPEC OMPG2012 Result

Copyright 2012-2016 Standard Performance Evaluation Corporation

Intel

Intel R2308WTTYS (Intel Xeon E5-2699 v4, 2.2GHz,
DDR4-2400 MHz,SMT ON, Turbo ON)

SPECompG_peak2012 = 12.8

SPECompG_base2012 = 11.9

OMP2012 license:13

Test sponsor: Intel

Tested by: Intel

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Feb-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

350.md: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=1 -fp-model fast=2 -no-prec-div
-no-prec-sqrt -align array64byte

351.bwaves: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias -fp-model fast=2
-no-prec-div -no-prec-sqrt -align array64byte

357.bt331: Same as 351.bwaves

360.ilbdc: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-align array64byte

362.fma3d: Same as 360.ilbdc

363.swim: -O3 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-streaming-stores always -opt-malloc-options=3
-align array64byte

370.mgrid331: -O2 -qopenmp -ipo -xCORE-AVX2 -fno-alias
-opt-malloc-options=3 -align array64byte

371.applu331: -O3 -qopenmp -ipo -xCORE-AVX2 -align array64byte

The flags file that was used to format this result can be browsed at

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20160622.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/omp2012/flags/Intel-ic13.0-linux64.20160622.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC OMP2012 v1.0.

Report generated on Wed Jun 22 11:18:36 2016 by SPEC OMP2012 PS/PDF formatter v541.

Originally published on 22 June 2016.