



SPEC ACCEL™ OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

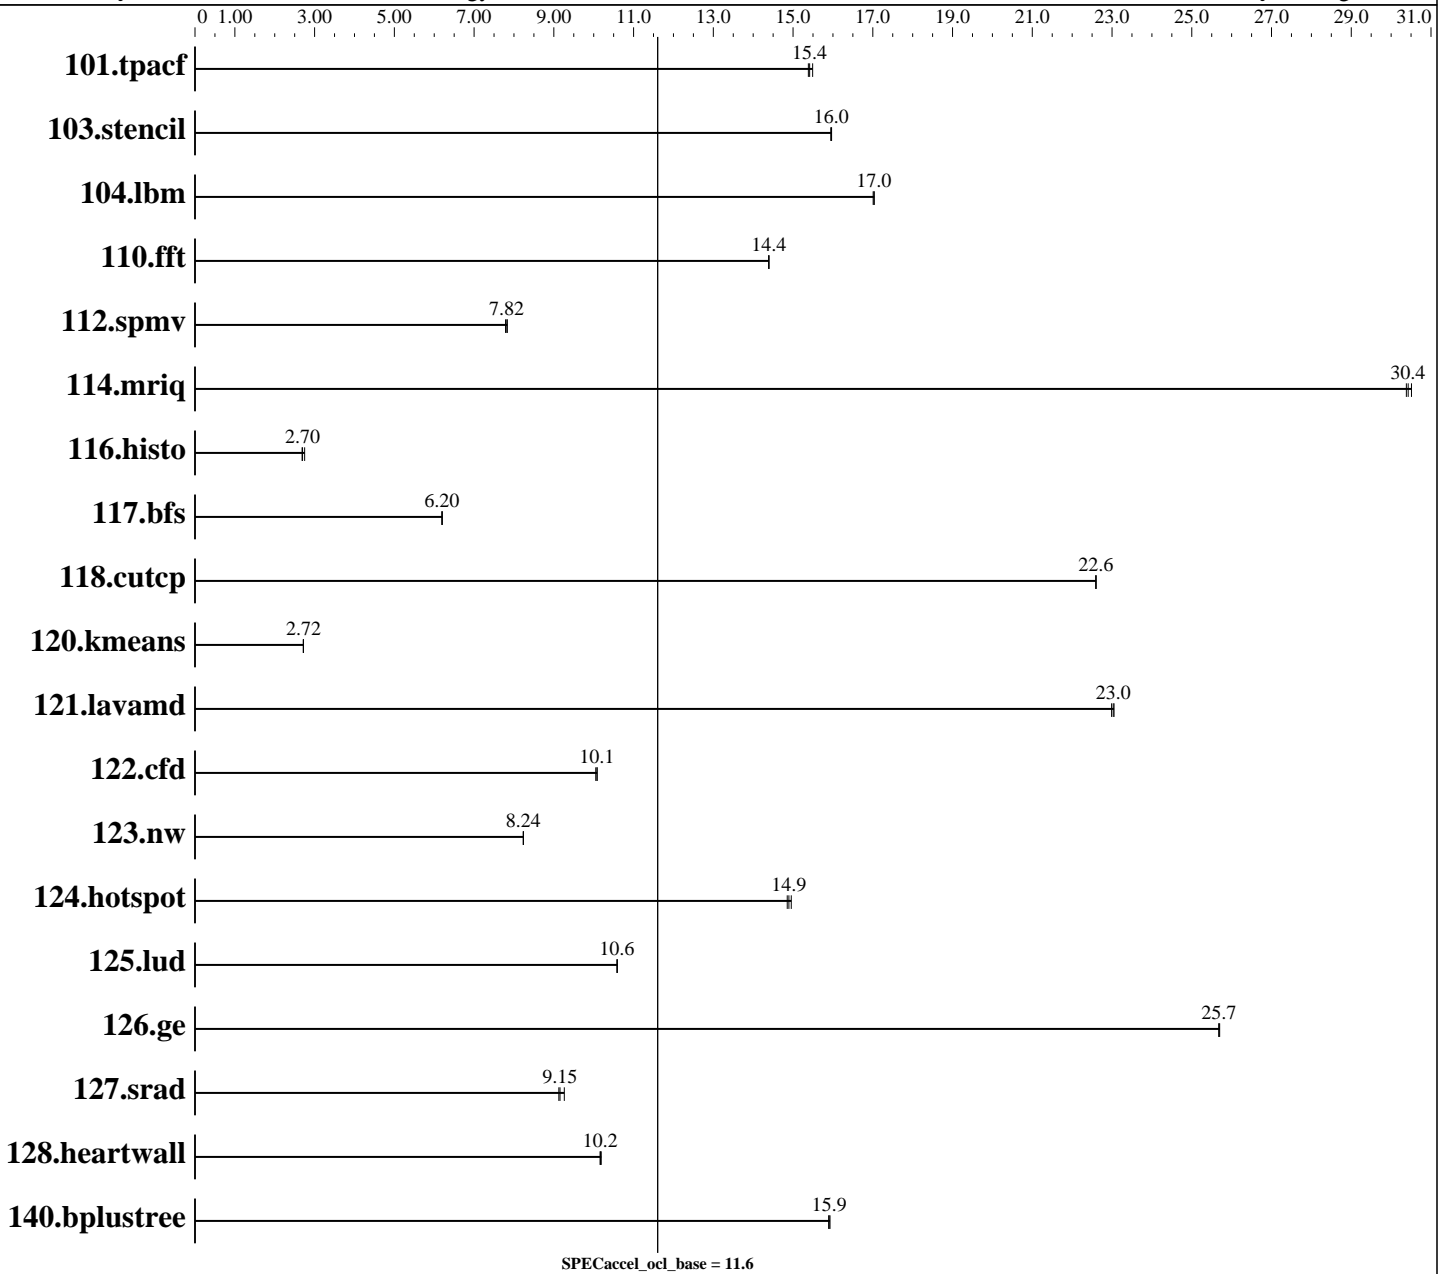



SPEC ACCEL OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Hardware

CPU Name: AMD EPYC 7742 64-Core
CPU Characteristics: Turbo up to 3.4 GHz
CPU MHz: 2250
CPU MHz Maximum: 3400
FPU: Integrated
CPU(s) enabled: 64 cores, 1 chip, 64 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 256 MB I+D on chip per chip
16 MB shared / 4 cores
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem: 1 x 480 GB SATA 2.5" SSD
Other Hardware: None

Accelerator

Accel Model Name: Tesla V100
Accel Vendor: NVIDIA Corporation
Accel Name: NVIDIA Tesla V100-PCIE-16GB
Type of Accel: GPU
Accel Connection: PCIe 3.0 16x
Does Accel Use ECC: Yes
Accel Description: NVIDIA Tesla V100-PCIE-16GB
Accel Driver: NVIDIA UNIX x86_64 Kernel Module 418.39

Software

Operating System: SUSE Linux Enterprise Server 12 SP4
4.12.14-94.41-default
Compiler: PGI Accelerator Server Complete, Release 19.5
File System: xfs
System State: Multi-user, run level 3
Other Software: CUDA 10.1 SDK



SPEC ACCEL OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
101.tpacf	6.91	15.5	<u>6.94</u>	<u>15.4</u>	6.96	15.4						
103.stencil	<u>7.83</u>	<u>16.0</u>	7.83	16.0	7.84	15.9						
104.lbm	6.58	17.0	<u>6.58</u>	<u>17.0</u>	6.57	17.0						
110.fft	7.71	14.4	7.71	14.4	<u>7.71</u>	<u>14.4</u>						
112.spmv	18.8	7.83	18.9	7.79	<u>18.8</u>	<u>7.82</u>						
114.mriq	3.57	30.5	<u>3.58</u>	<u>30.4</u>	3.59	30.4						
116.histo	42.4	2.69	41.5	2.75	<u>42.3</u>	<u>2.70</u>						
117.bfs	<u>18.9</u>	<u>6.20</u>	18.9	6.20	18.9	6.19						
118.cutcp	4.38	22.6	<u>4.38</u>	<u>22.6</u>	4.38	22.6						
120.kmeans	36.7	2.72	<u>36.7</u>	<u>2.72</u>	36.8	2.71						
121.lavamd	<u>4.73</u>	<u>23.0</u>	4.73	23.1	4.74	23.0						
122.cfd	12.5	10.1	12.5	10.1	<u>12.5</u>	<u>10.1</u>						
123.nw	14.0	8.24	<u>14.0</u>	<u>8.24</u>	14.0	8.24						
124.hotspot	7.62	15.0	<u>7.65</u>	<u>14.9</u>	7.67	14.9						
125.lud	<u>11.2</u>	<u>10.6</u>	11.2	10.6	11.2	10.6						
126.ge	6.03	25.7	6.04	25.7	<u>6.04</u>	<u>25.7</u>						
127.srad	<u>12.5</u>	<u>9.15</u>	12.5	9.13	12.3	9.26						
128.heartwall	<u>10.4</u>	<u>10.2</u>	10.4	10.2	10.4	10.2						
140.bplustree	6.78	15.9	<u>6.79</u>	<u>15.9</u>	6.80	15.9						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Platform Notes

```
Sysinfo program /home/ACCEL1.2/Docs/sysinfo
$Rev: 6965 $ $Date:: 2015-04-21 $# c05a7f14b1b1765e3fe1df68447e8a35
running on bannerrh75 Wed Mar 27 00:21:09 2019
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/accel/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7742 64-Core Processor
```

Continued on next page



SPEC ACCEL OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

```

1 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 64
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46
47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
cache size : 512 KB

From /proc/meminfo
MemTotal:      264016424 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
Linux bannerrh75 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018
(3090901) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 3 10:26

SPEC is set to: /home/ACCEL1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   245G  72G  174G  30% /home
Additional information from dmidecode:

```

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC ACCEL OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo CFE101Y 06/22/2019

Memory:

8x Samsung M393A4K40DB2-CWE 32 GB 2 rank 3200 MHz

8x Unknown Unknown

(End of data from sysinfo program)

General Notes

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Runtime Environment

C benchmarks:

OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 10.1.105

OpenCL Device #0: Tesla V100-PCIE-16GB, v 418.39

C++ benchmarks:

OpenCL Platform: NVIDIA CUDA, OpenCL 1.2 CUDA 10.1.105

OpenCL Device #0: Tesla V100-PCIE-16GB, v 418.39

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgc++

Base Portability Flags

116.histo: -DSPEC_LOCAL_MEMORY_HEADROOM=1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC ACCEL OCL Result

Copyright 2015-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology
NVIDIA Tesla V100-PCIE-16GB
ThinkSystem SR655

SPECaccel_ocl_peak = Not Run

SPECaccel_ocl_base = 11.6

ACCEL license: 28
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2019
Hardware Availability: Aug-2019
Software Availability: Aug-2019

Base Portability Flags (Continued)

118.cutcp: -D__GNUC__

Base Optimization Flags

C benchmarks:
-fast -Mfprelaxed

C++ benchmarks:
-fast -Mfprelaxed

Base Other Flags

C benchmarks:
-I/usr/local/cuda-10.1/targets/x86_64-linux/include
-L/usr/local/cuda-10.1/lib64 -lOpenCL

C++ benchmarks:
-I/usr/local/cuda-10.1/targets/x86_64-linux/include
-L/usr/local/cuda-10.1/lib64 -lOpenCL

The flags files that were used to format this result can be browsed at

https://www.spec.org/accel/flags/pgi2014_flags.20190321.html
https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190807.html

You can also download the XML flags sources by saving the following links:

https://www.spec.org/accel/flags/pgi2014_flags.20190321.xml
https://www.spec.org/accel/flags/Lenovo-SPECACCEL1.2_Platform_Flags.20190807.xml

SPEC ACCEL is a trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC ACCEL v1.2.
Report generated on Wed Aug 7 19:04:34 2019 by SPEC ACCEL PS/PDF formatter v1290.
Originally published on 6 August 2019.