



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13


Test Sponsor: Intel

Tested by: Intel

Test Date: Dec-2023

Hardware Availability: Jan-2023

Software Availability: Nov-2023

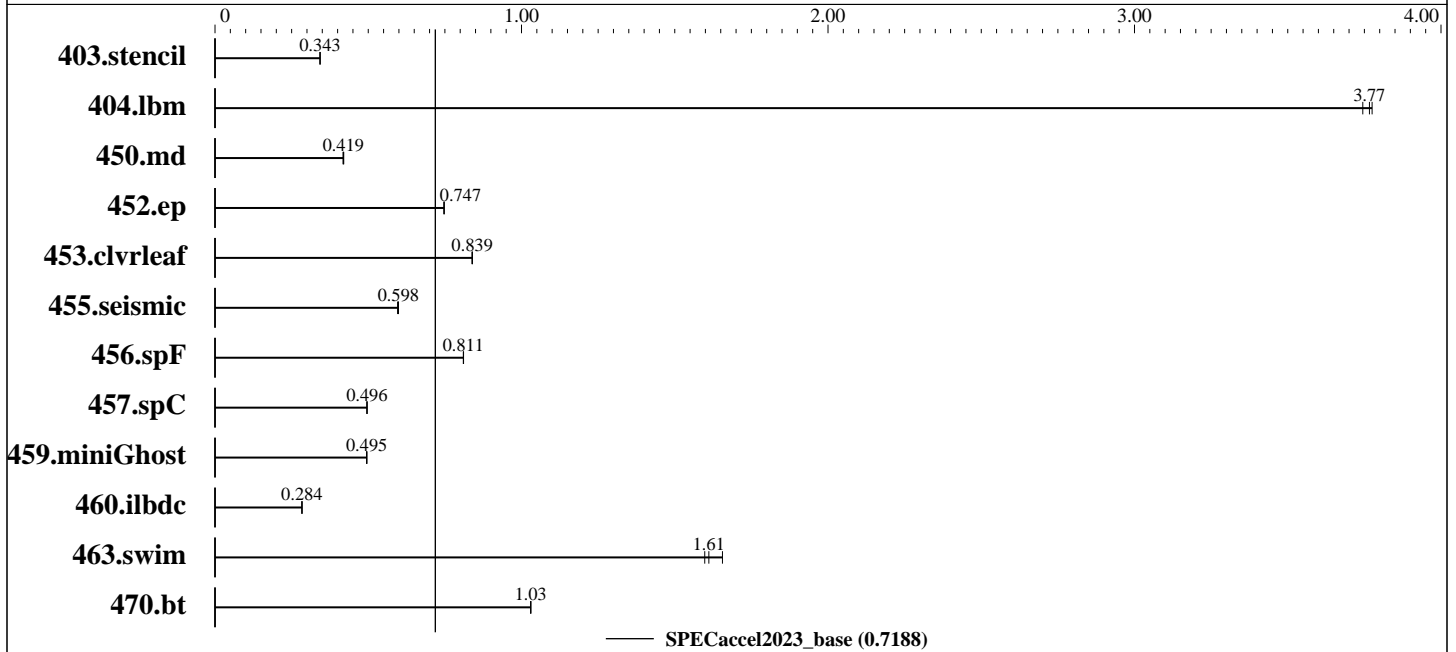

Hardware		Accelerator	
CPU Name:	Intel Xeon Platinum 8480+	Accel Model Name:	Intel Xeon Platinum 8480+
Max MHz.:	3800	Accel Vendor:	Intel
Nominal:	2000	Accel Name:	Intel Xeon Platinum 8480+
Enabled:	56 cores, 1 chip, 2 threads/core	Type of Accel:	CPU
Orderable:	1 chip	Accel Connection:	N/A
Cache L1:	32 KB I + 48 KB D on chip per core	Does Accel Use ECC:	yes
L2:	2 MB I+D on chip per core	Accel Description:	Intel Xeon Platinum 8480+ SMT ON, Turbo ON
L3:	105 MB I+D on chip per chip	Accel Driver:	N/A
Other:	None		
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B)		
Storage:	269 TB		
Other:	None		
Base Threads Run:	112		
Min. Peak Threads:	--		
Max. Peak Threads:	--		

Software	
OS:	Rocky Linux 8.8 (Green Obsidian) SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.24.100-default
Compiler:	Intel oneAPI Compiler 2024.0.2
Firmware:	SE5C7411.86B.9525.D26.2305160804
File System:	panfs
System State:	Run level 5
Other:	None
Base Parallel Model:	SMD
Base Threads Run:	112

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Software (Continued)

Peak Parallel Models: Not Run
Max. Peak Threads: --
Min. Peak Threads: --

Results Table

Benchmark	Base								Peak							
	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Model	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
403.stencil	SMD	1284	0.343	1284	0.343	1284	0.343									
404.lbm	SMD	121	3.78	121	3.77	121	3.74									
450.md	SMD	1436	0.418	1429	0.420	1432	0.419									
452.ep	SMD	555	0.747	555	0.748	555	0.747									
453.clvleaf	SMD	1191	0.839	1191	0.840	1192	0.839									
455.seismic	SMD	1304	0.598	1309	0.596	1303	0.598									
456.spF	SMD	586	0.811	586	0.811	586	0.810									
457.spC	SMD	1089	0.496	1089	0.496	1088	0.496									
459.miniGhost	SMD	1192	0.495	1192	0.495	1191	0.495									
460.ilbdc	SMD	1956	0.284	1958	0.283	1955	0.284									
463.swim	SMD	266	1.66	275	1.60	273	1.61									
470.bt	SMD	1024	1.03	1024	1.03	1024	1.03									

SPEC accel2023_base = **0.7188**

SPEC accel2023_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Environment variables set by runaccel before the start of the run:

```
FORT_BUFFERED = "true"
KMP_AFFINITY = "compact,0,granularity=thread"
KMP_BLOCKTIME = "infinite"
KMP_HW_SUBSET = "1S,56C,2T"
KMP_LIBRARY = "turnaround"
KMP_STACKSIZE = "8M"
OMP_DYNAMIC = "FALSE"
OMP_WAIT_POLICY = "active"
```

The PANASAS filesystem as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC HPG Policy document, <http://www.spec.org/hpg/policy.html>



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Platform Notes

Sysinfo program /global/panfs02/innl/abobyrr/SpecACCEL_OMP/kits/accel2023/bin/sysinfo
Rev: r6622 of 2021-04-07 bla7d5f8f71be5aff70a755cad7211a0
running on eedq016 Tue Dec 26 13:11:12 2023

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8480+
1 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 56
siblings : 112
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 224
On-line CPU(s) list: 0-55,112-167
Off-line CPU(s) list: 56-111,168-223
Vendor ID: GenuineIntel
Model name: Intel(R) Xeon(R) Platinum 8480+
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 56
Socket(s): 1
Stepping: 6
Frequency boost: enabled
CPU max MHz: 2001.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Platform Notes (Continued)

epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a
avx512f avx512dq rdseed adx avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_llc arch_capabilities

L1d cache: 2.6 MiB (56 instances)
L1i cache: 1.8 MiB (56 instances)
L2 cache: 112 MiB (56 instances)
L3 cache: 105 MiB (1 instance)
NUMA node(s): 2
NUMA node0 CPU(s): 0-55,112-167
NUMA node1 CPU(s):
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	105M	105M	15	Unified	3	114688	1	64

/proc/cpuinfo cache data
cache size : 107520 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Platform Notes (Continued)

28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 112
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134
135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156
157 158 159 160 161 162 163 164 165 166 167

node 0 size: 257691 MB

node 0 free: 245248 MB

node 1 cpus:

node 1 size: 257971 MB

node 1 free: 256728 MB

node distances:

```
node  0  1
  0:  10  21
  1:  21  10
```

From /proc/meminfo

MemTotal: 528039232 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
userspace

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 15 SP4

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="15-SP4"

VERSION_ID="15.4"

PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"

ID="sles"

ID_LIKE="suse"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:

Linux eedq016 5.14.21-150400.24.100-default #1 SMP PREEMPT_DYNAMIC Mon Dec 4 19:12:13
UTC 2023 (3f5cd84) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

gather_data_sampling:	Not affected
CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Platform Notes (Continued)

mmio_stale_data:	Not affected
retbleed:	Not affected
spec_rstack_overflow:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced / Automatic IBRS, IBPB: conditional, RSB filling, PBRSE-eIBRS: SW sequence
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Dec 26 13:04

```
SPEC is set to: /global/panfs02/innl/abobyrr/SpecACCEL_OMP/kits/accel2023
Filesystem      Type      Size  Used Avail Use% Mounted on
panfs://36.101.212.1/innl panfs 269T 244T 25T 91% /global/panfs02/innl
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Intel Corporation
Product:         D50DNP1SBB
Product Family: Family
```

```
Cannot run dmidecode; consider saying (as root)
chmod +s /usr/sbin/dmidecode
```

```
BIOS:
  BIOS Vendor:    Intel Corporation
  BIOS Version:   SE5C7411.86B.9525.D26.2305160804
  BIOS Date:      05/16/2023
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 403.stencil(base) 404.lbm(base) 452.ep(base) 457.spC(base)
          | 470.bt(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler
```

(Continued on next page)



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Compiler Version Notes (Continued)

Configuration file:

/home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg

=====
Fortran | 450.md(base) 455.seismic(base) 456.spF(base) 460.ilbdc(base)
| 463.swim(base)

=====
ifx (IFX) 2024.0.2 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 453.clvrleaf(base) 459.miniGhost(base)

=====
ifx (IFX) 2024.0.2 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler 2024.0.2 (2024.0.2.20231213)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler

Configuration file:

/home/abobyrr/intel/oneapi/compiler/2024.0/bin/compiler/./icx.cfg

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Base Portability Flags

450.md: -80

457.spC: -w1,--no-relax(icx)(*) -shared-intel -w1,--no-relax(icx)

459.miniGhost: -nofor-main

(*) Indicates a portability flag that was found in a non-portability variable.



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+

Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188

SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

Base Optimization Flags

C benchmarks:

403.stencil: -Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math
-fiopenmp -qopt-dynamic-align -fvec-peel-loops
-qopt-streaming-stores always -Xclang
-fopenmp-declare-target-scalar-defaultmap-firstprivate
-fimf-precision=low

404.lbm: Same as 403.stencil

452.ep: Same as 403.stencil

457.spC: -Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math
-fiopenmp -qopt-dynamic-align -fvec-peel-loops
-qopt-streaming-stores always -Xclang
-fopenmp-declare-target-scalar-defaultmap-firstprivate
-fimf-precision=low -mcmmodel=medium(*)

470.bt: Same as 403.stencil

Fortran benchmarks:

-Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always
-nostandard-realloc-lhs -align array32byte -auto
-fimf-accuracy-bits-sqrt=14 -fimf-precision=low

Benchmarks using both Fortran and C:

-Ofast -O3 -xCORE-AVX512 -mprefer-vector-width=512
-qopt-multiple-gather-scatter-by-shuffles -flto -ffast-math -fiopenmp
-qopt-dynamic-align -fvec-peel-loops -qopt-streaming-stores always
-Xclang -fopenmp-declare-target-scalar-defaultmap-firstprivate
-fimf-precision=low -nostandard-realloc-lhs -align array32byte -auto
-fimf-accuracy-bits-sqrt=14

(*) Indicates an optimization flag that was found in a portability variable.

The flags file that was used to format this result can be browsed at

http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-02-14.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/accel2023/flags/Intel_compiler_flags.2024-02-14.xml



SPECaccel[®]2023 Result

Copyright 2023-2024 Standard Performance Evaluation Corporation

Intel
Intel Xeon Platinum 8480+
 Intel Server D50DNP2MFALACB (1 x Intel Xeon Platinum 8480+, 2.0GHz)

SPECaccel2023_base = 0.7188
 SPECaccel2023_peak = Not Run

accel2023 License: 13
Test Sponsor: Intel
Tested by: Intel

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2023

SPECaccel is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPECaccel2023 v2.0.17 on 2023-12-26 15:11:12-0500.
 Report generated on 2024-02-14 12:22:20 by accel2023 PDF formatter v112.
 Originally published on 2024-02-14.