



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor 5160,3.00GHz)

SPECfp®_rate2006 = 44.1

SPECfp_rate_base2006 = 43.4

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

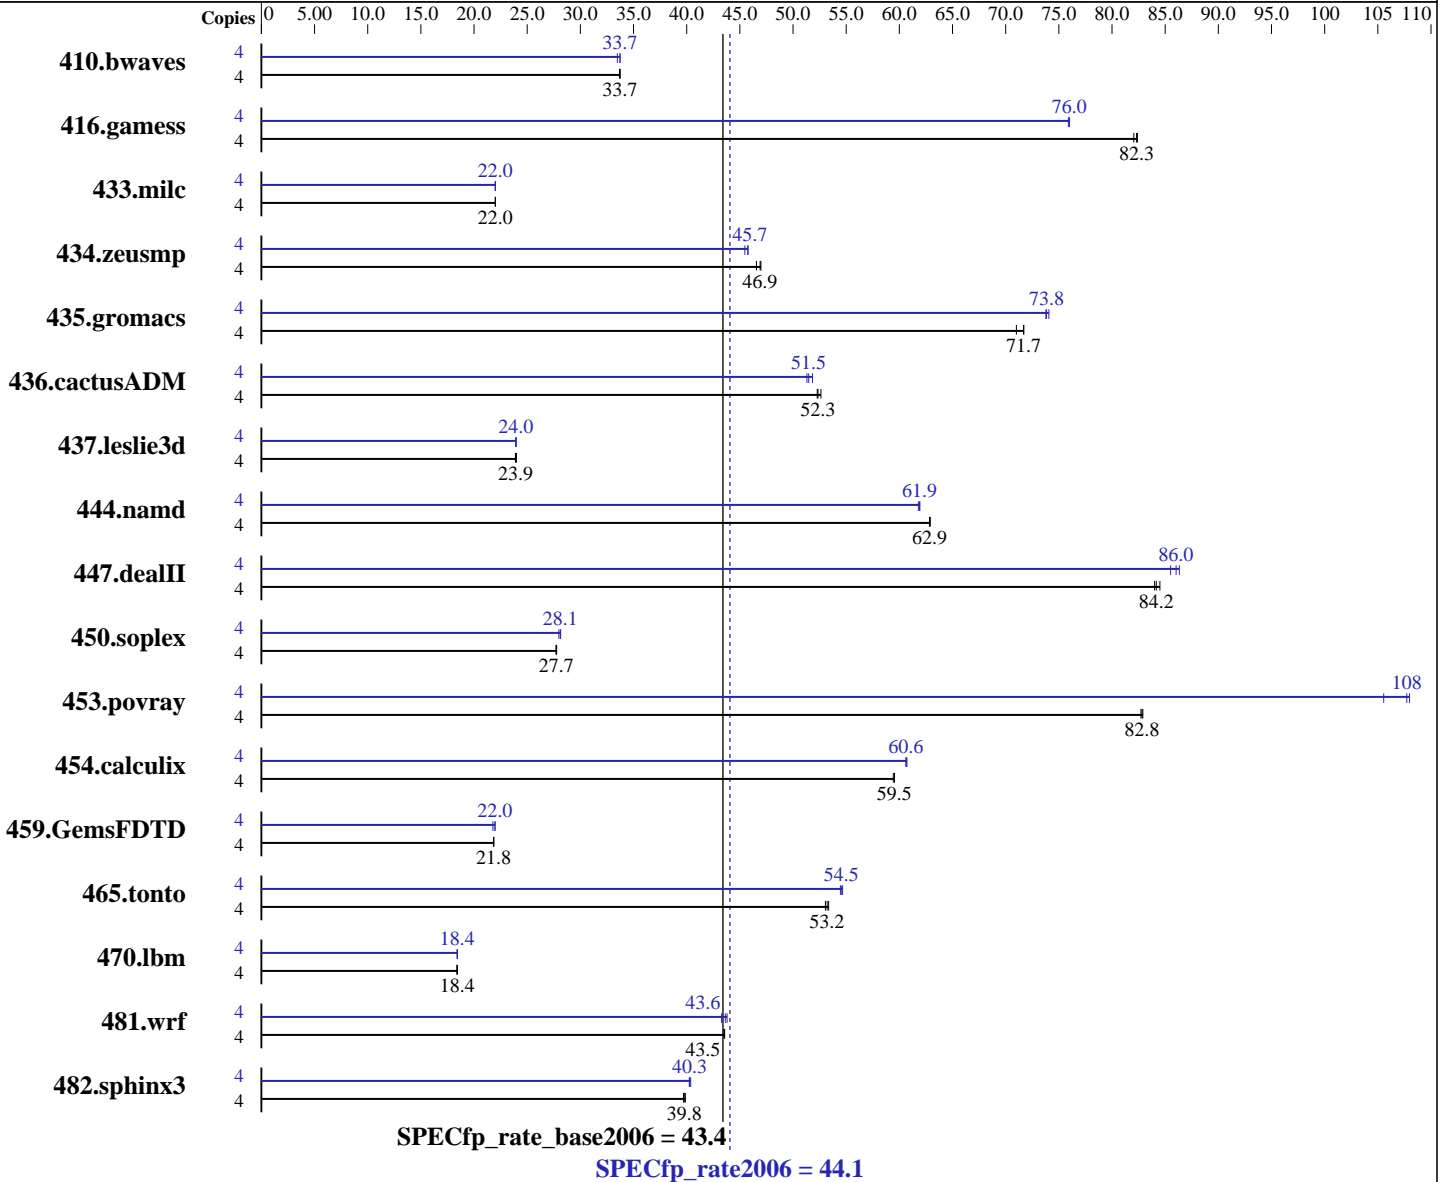

Hardware

CPU Name: Intel Xeon 5160
 CPU Characteristics: 3.00 GHz, 4 MB L2, 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1 to 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (EM64T)
 kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_cc_c_9.1.045 Build no 20061101
 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1
 Package ID l_fc_c_9.1.040 Build no 20061101
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.4

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: May-2007

Hardware Availability: Mar-2007

Software Availability: Dec-2006

L3 Cache: None
Other Cache: None
Memory: 24 GB (12x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem: 1x73 GB SAS, 15000 RPM
Other Hardware: None

File System: ext2
System State: Multi-user run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1611	33.7	1612	33.7	1614	33.7	4	1612	33.7	1612	33.7	1624	33.5
416.gamess	4	952	82.3	951	82.4	955	82.0	4	1031	76.0	1032	75.9	1030	76.0
433.milc	4	1669	22.0	1669	22.0	1668	22.0	4	1669	22.0	1669	22.0	1669	22.0
434.zeusmp	4	776	46.9	782	46.6	775	47.0	4	801	45.5	795	45.8	796	45.7
435.gromacs	4	398	71.7	398	71.7	402	71.0	4	386	74.1	387	73.8	387	73.8
436.cactusADM	4	913	52.3	908	52.6	914	52.3	4	932	51.3	929	51.5	922	51.8
437.leslie3d	4	1568	24.0	1572	23.9	1574	23.9	4	1572	23.9	1570	24.0	1569	24.0
444.namd	4	510	62.9	510	62.9	511	62.8	4	518	61.9	518	61.9	519	61.8
447.dealII	4	545	84.0	542	84.5	544	84.2	4	530	86.3	532	86.0	535	85.5
450.soplex	4	1201	27.8	1204	27.7	1202	27.7	4	1187	28.1	1192	28.0	1185	28.1
453.povray	4	257	82.9	257	82.8	257	82.7	4	202	106	197	108	198	108
454.calculix	4	554	59.5	555	59.4	554	59.5	4	544	60.7	544	60.6	544	60.6
459.GemsFDTD	4	1943	21.8	1944	21.8	1941	21.9	4	1932	22.0	1931	22.0	1949	21.8
465.tonto	4	738	53.3	742	53.0	740	53.2	4	722	54.5	720	54.7	723	54.5
470.lbm	4	2983	18.4	2990	18.4	2981	18.4	4	2983	18.4	2984	18.4	2983	18.4
481.wrf	4	1027	43.5	1025	43.6	1027	43.5	4	1024	43.6	1032	43.3	1020	43.8
482.sphinx3	4	1964	39.7	1960	39.8	1955	39.9	4	1931	40.4	1935	40.3	1937	40.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
'/usr/bin/taskset' used to bind processes to CPUs

General Notes

The NovaScale R440 and the NovaScale R460 models are electronically equivalent.
The results have been measured on a NovaScale R460 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor 5160,3.00GHz)

SPECfp_rate2006 = 44.1

SPECfp_rate_base2006 = 43.4

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:11:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.