



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon X5460)

SPECint®_rate2006 = 72.5

SPECint_rate_base2006 = 61.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

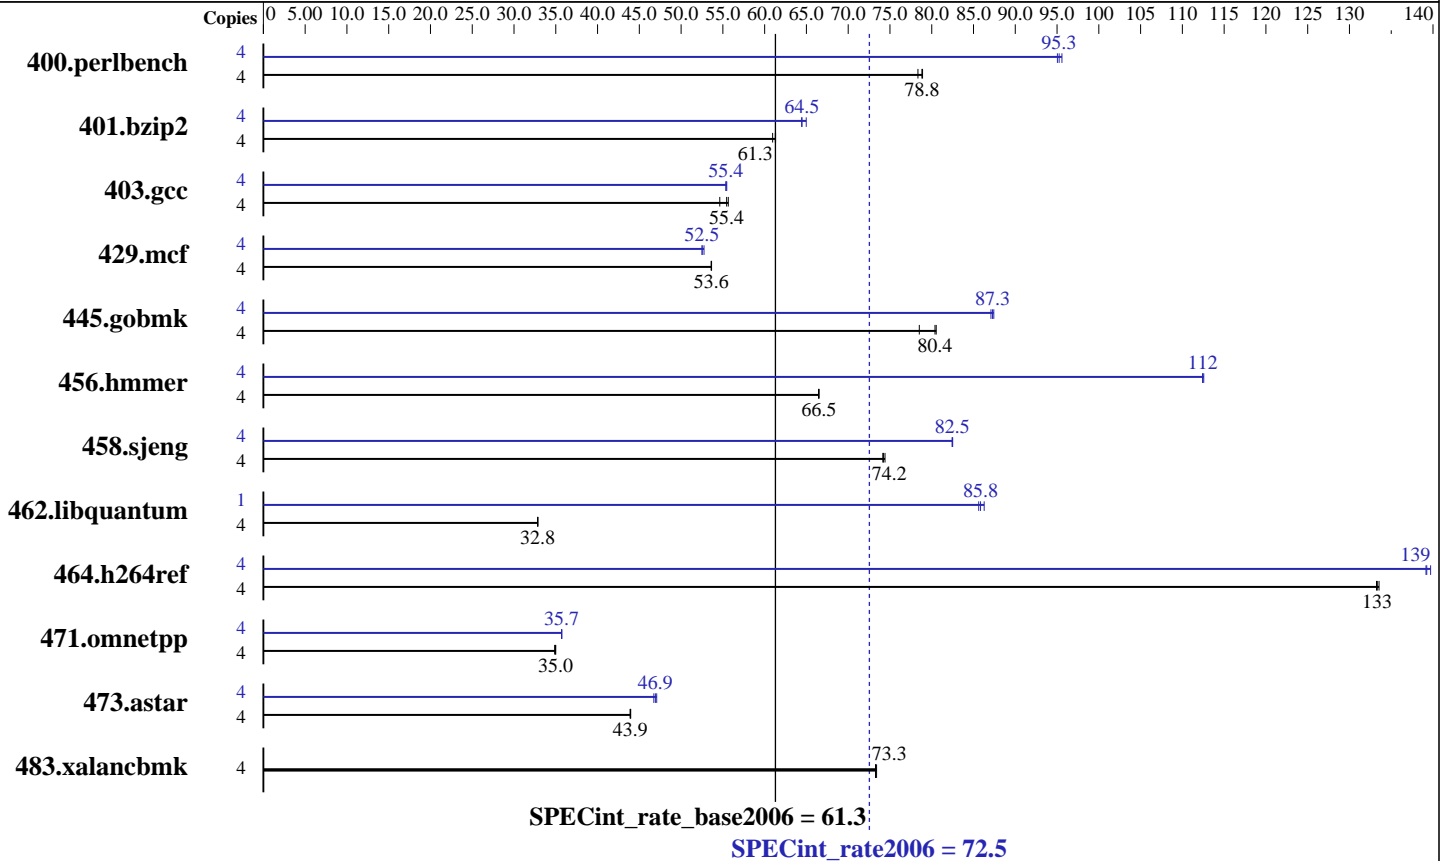

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 3.16 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 3167
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon X5460)

SPECint_rate2006 = 72.5

SPECint_rate_base2006 = 61.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	496	78.8	499	78.3	495	78.9	4	409	95.6	411	95.0	410	95.3
401.bzip2	4	633	61.0	630	61.3	630	61.3	4	594	65.0	599	64.5	599	64.4
403.gcc	4	589	54.6	579	55.6	581	55.4	4	581	55.5	582	55.4	582	55.4
429.mcf	4	680	53.6	680	53.6	681	53.6	4	695	52.5	692	52.7	695	52.5
445.gobmk	4	534	78.5	522	80.4	521	80.5	4	482	87.1	481	87.3	480	87.4
456.hmmer	4	561	66.5	561	66.5	562	66.4	4	332	112	332	112	332	113
458.sjeng	4	652	74.2	650	74.4	653	74.1	4	587	82.5	587	82.4	587	82.5
462.libquantum	4	2524	32.8	2523	32.8	2524	32.8	1	242	85.6	241	85.8	240	86.3
464.h264ref	4	663	134	664	133	664	133	4	636	139	636	139	634	140
471.omnetpp	4	715	35.0	717	34.9	715	35.0	4	700	35.7	700	35.7	700	35.7
473.astar	4	639	43.9	639	44.0	640	43.9	4	596	47.1	598	46.9	601	46.7
483.xalancbmk	4	376	73.4	377	73.3	377	73.3	4	376	73.4	377	73.3	377	73.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Disabled
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2, 456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Lj(Intel Xeon X5460) and the Bull NovaScale T860 E1(Intel Xeon X5460,3.16GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon X5460) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 72.5

Express5800/120Lj
(Intel Xeon X5460)

SPECint_rate_base2006 = 61.3

CPU2006 license: 9006

Test date: May-2008

Test sponsor: NEC Corporation

Hardware Availability: Apr-2008

Tested by: NEC Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 72.5

Express5800/120Lj
(Intel Xeon X5460)

SPECint_rate_base2006 = 61.3

CPU2006 license: 9006

Test date: May-2008

Test sponsor: NEC Corporation

Hardware Availability: Apr-2008

Tested by: NEC Corporation

Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Lj
(Intel Xeon X5460)

SPECint_rate2006 = 72.5

SPECint_rate_base2006 = 61.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:29:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.