



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13


Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

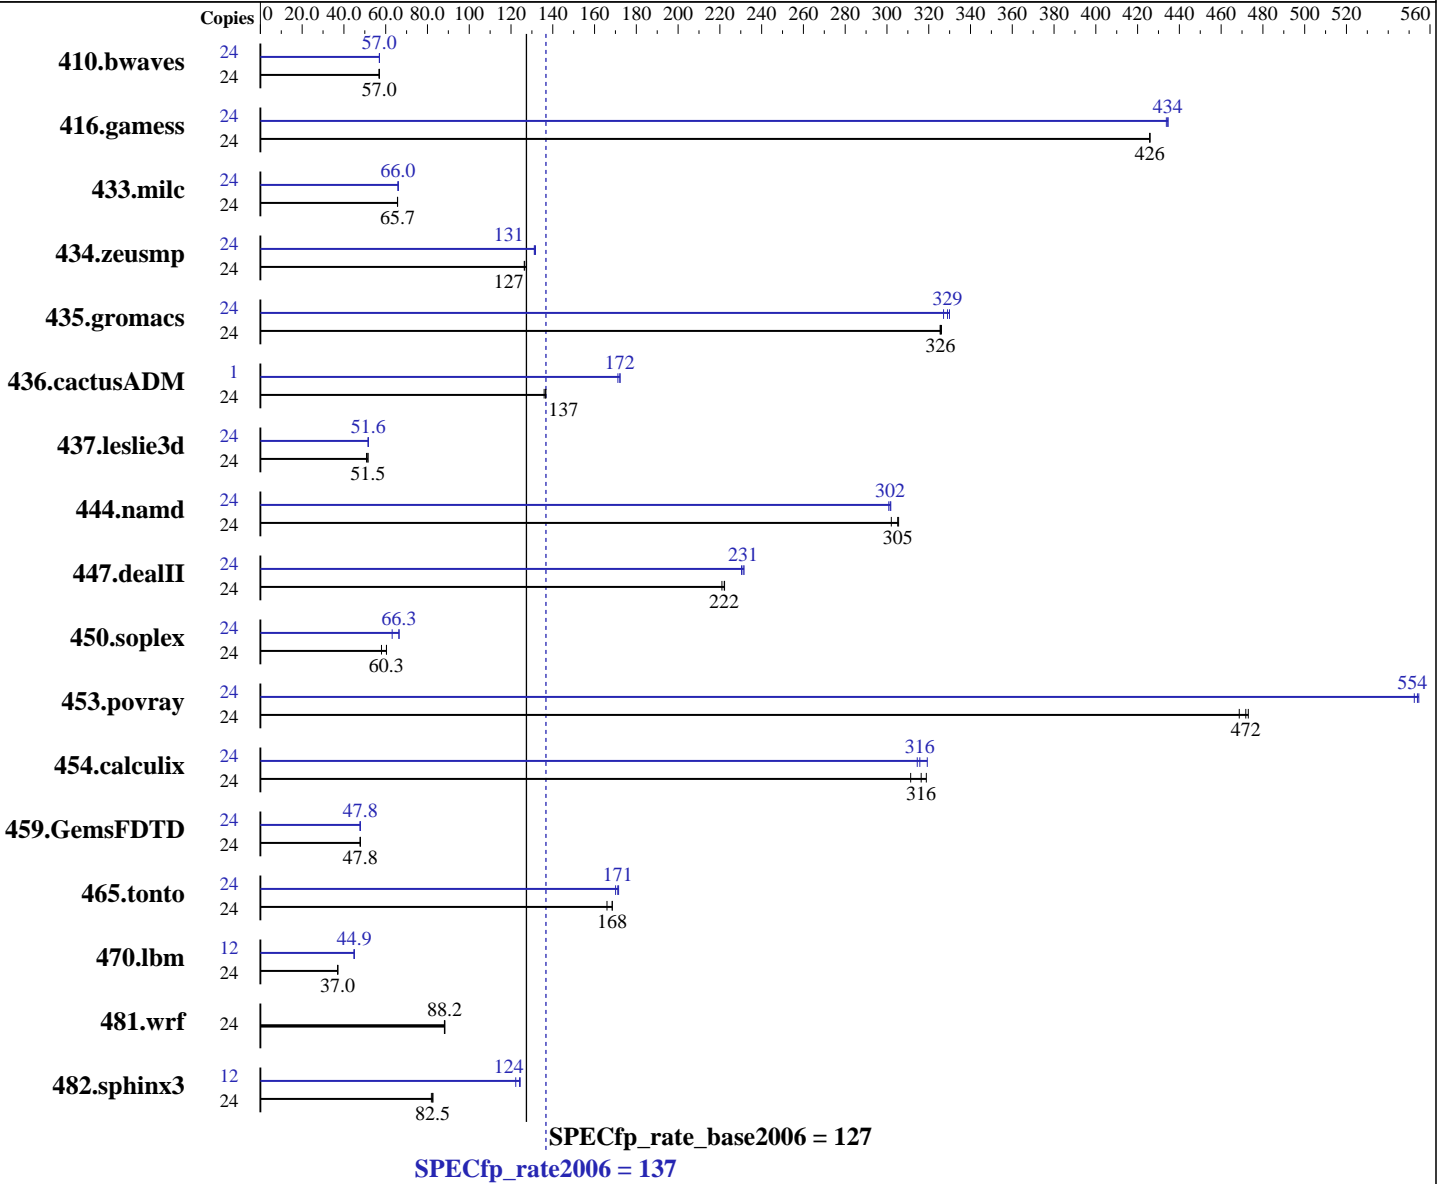

Hardware

CPU Name: Intel Xeon E7450
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 1, 2, 4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSe Linux SLES10 SP2
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20080730 Package ID: l_cc_b_11.0.042,
 l_fc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (16x2GB Micron DDR2 5300F,CL5-5-5, 2 rank, ECC)
Disk Subsystem: 73 GB Seagate SAS, 10K RPM
Other Hardware: None

Other Software: Microquill SmartHeap V8.1
Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	5743	56.8	5725	57.0	5721	57.0	24	5722	57.0	5722	57.0	5722	57.0
416.gamess	24	1104	426	1103	426	1103	426	24	1083	434	1082	434	1081	435
433.milc	24	3357	65.6	3353	65.7	3356	65.7	24	3341	66.0	3340	66.0	3339	66.0
434.zeusmp	24	1729	126	1714	127	1726	127	24	1665	131	1662	131	1658	132
435.gromacs	24	526	326	525	326	527	325	24	519	330	521	329	524	327
436.cactusADM	24	2111	136	2099	137	2099	137	1	69.4	172	69.8	171	69.4	172
437.leslie3d	24	4440	50.8	4381	51.5	4381	51.5	24	4368	51.6	4369	51.6	4367	51.7
444.namd	24	631	305	637	302	630	306	24	638	302	640	301	638	302
447.dealII	24	1236	222	1235	222	1242	221	24	1192	230	1186	232	1188	231
450.soplex	24	3452	58.0	3317	60.3	3315	60.4	24	3172	63.1	3019	66.3	3013	66.4
453.povray	24	272	469	271	472	270	473	24	230	554	230	555	231	552
454.calculix	24	626	316	636	311	621	319	24	620	319	627	316	630	315
459.GemsFDTD	24	5326	47.8	5321	47.9	5323	47.8	24	5325	47.8	5327	47.8	5328	47.8
465.tonto	24	1402	168	1423	166	1402	168	24	1380	171	1389	170	1377	172
470.lbm	24	8908	37.0	8905	37.0	8901	37.0	12	3670	44.9	3670	44.9	3671	44.9
481.wrf	24	3043	88.1	3040	88.2	3034	88.3	24	3043	88.1	3040	88.2	3034	88.3
482.sphinx3	24	5713	81.9	5663	82.6	5670	82.5	12	1913	122	1880	124	1885	124

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode
taskset was used to bind processes to cores except for 436.cactusADM peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetcher: Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

General Notes (Continued)

High Bandwidth Option: Enabled

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 137

Intel Server System S7000FC4UR (Intel Xeon E7450)

SPECfp_rate_base2006 = 127

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:52:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.