



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11


Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: IBM Corporation

Software Availability: May-2008

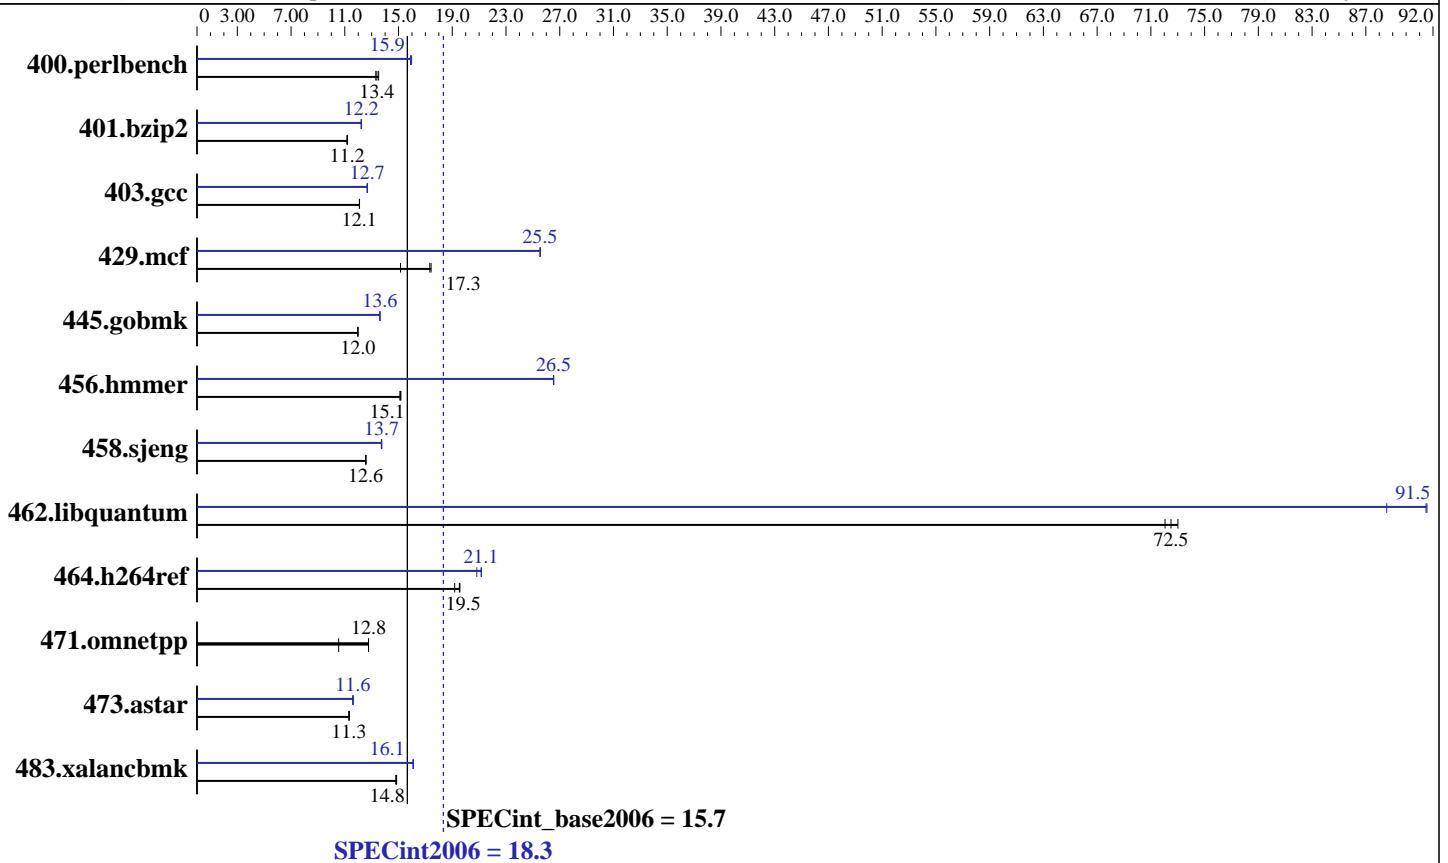

Hardware

CPU Name: AMD Opteron 8376 HE
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-6400 ECC)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18.50



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: IBM Corporation

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	723	13.5	734	13.3	<u>729</u>	<u>13.4</u>	<u>614</u>	<u>15.9</u>	615	15.9	612	16.0
401.bzip2	<u>863</u>	<u>11.2</u>	861	11.2	865	11.2	790	12.2	<u>789</u>	<u>12.2</u>	789	12.2
403.gcc	666	12.1	665	12.1	<u>666</u>	<u>12.1</u>	636	12.7	<u>635</u>	<u>12.7</u>	635	12.7
429.mcf	<u>526</u>	<u>17.3</u>	523	17.4	602	15.1	357	25.5	357	25.5	<u>357</u>	<u>25.5</u>
445.gobmk	<u>876</u>	<u>12.0</u>	876	12.0	876	12.0	771	13.6	<u>770</u>	<u>13.6</u>	770	13.6
456.hmmmer	615	15.2	<u>617</u>	<u>15.1</u>	617	15.1	352	26.5	<u>352</u>	<u>26.5</u>	351	26.6
458.sjeng	<u>963</u>	<u>12.6</u>	964	12.6	962	12.6	<u>880</u>	<u>13.7</u>	880	13.8	882	13.7
462.libquantum	288	72.1	284	73.0	<u>286</u>	<u>72.5</u>	<u>227</u>	<u>91.5</u>	226	91.6	234	88.6
464.h264ref	1154	19.2	<u>1133</u>	<u>19.5</u>	1131	19.6	1062	20.8	1045	21.2	<u>1047</u>	<u>21.1</u>
471.omnetpp	593	10.5	489	12.8	<u>490</u>	<u>12.8</u>	593	10.5	489	12.8	<u>490</u>	<u>12.8</u>
473.astar	619	11.3	<u>621</u>	<u>11.3</u>	621	11.3	606	11.6	<u>604</u>	<u>11.6</u>	604	11.6
483.xalancbmk	464	14.9	466	14.8	<u>465</u>	<u>14.8</u>	428	16.1	<u>429</u>	<u>16.1</u>	429	16.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/pgi72/linux_lib32:/cpu2006/pgi72/linux_lib64"
PGI_HUGE_PAGES = "7168"
SPEC_DIR = "/cpu2006"
NCPUS = "8"

Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: IBM Corporation

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mloop32
 -Mconcur=innermost -Mfprelaxed -Mipa=fast -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mloop32
 -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32
 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:8

C++ benchmarks:

-Mipa=jobs:8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: IBM Corporation

Software Availability: May-2008

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mnovect -Mnounroll -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mprefetch=t0 -Mnounroll -tp barcelona-64 -Bstatic_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
 -Msmartalloc=huge -Mprefetch=t0 -Mnodalign -Mloop32
 -Mfprelaxed -tp barcelona-32 -Bstatic_pgi

429.mcf: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
 -Mipa=fast -Mipa=inline:1 -tp barcelona-32 -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mnovect -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11

Test date: Feb-2009

Test sponsor: IBM Corporation

Hardware Availability: Mar-2009

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags (Continued)

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mpfetch=distance:8 -Mconcur=innermost
-Mconcur=noaltcode -Mfprelaxed -Mipa=fast -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mloop32
-Mfprelaxed --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -Mvect=cachesize:6291456 --zc_eh -fastsse -O4 -Mfprelaxed
-Msmartalloc -Mipa=fast -Mipa=inline -tp barcelona-32
-Bstatic_pgi -lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-Mipa=jobs:8(pass 2)

401.bzip2: No flags used

C++ benchmarks (except as noted below):

-Mipa=jobs:8(pass 2)

483.xalancbmk: -Mipa=jobs:8 -L/proj/qa/smartheap/SmartHeap_8.1/lib

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.00.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.00.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 18.3

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_base2006 = 15.7

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Feb-2009

Hardware Availability: Mar-2009

Software Availability: May-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:31:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2009.