



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

### SPECint<sup>®</sup>\_rate2006 = 111

### Acer Altos R5250 (AMD Opteron 2360 SE)

### SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2009

Hardware Availability: May-2008

Software Availability: Oct-2008

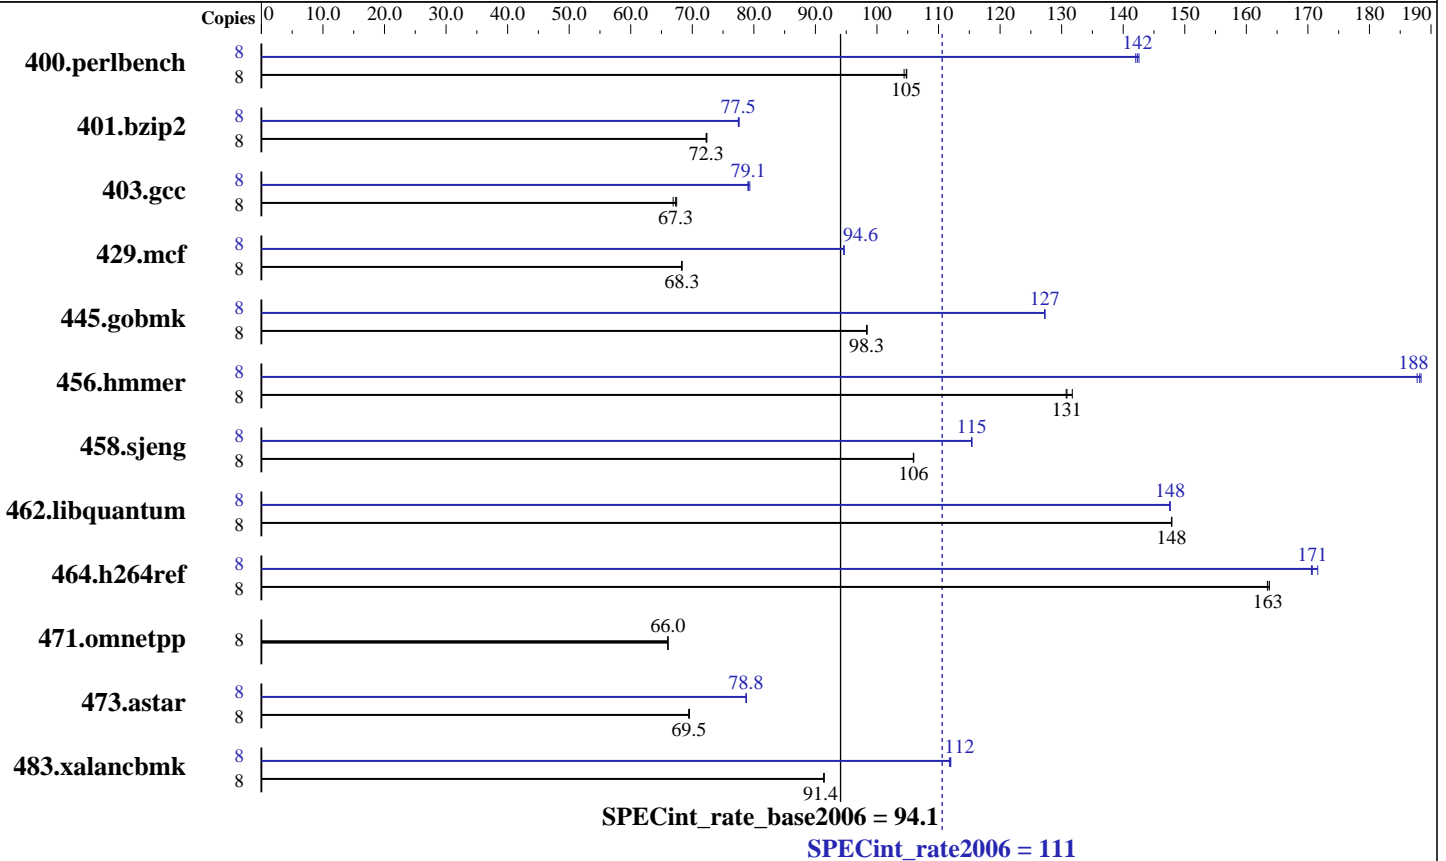

### Hardware

CPU Name: AMD Opteron 2360 SE  
 CPU Characteristics: 2500  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 160 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 111

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97

Test date: Feb-2009

Test sponsor: Acer Incorporated

Hardware Availability: May-2008

Tested by: Acer Incorporated

Software Availability: Oct-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	749	104	746	105	<b>746</b>	<b>105</b>	8	<b>549</b>	<b>142</b>	550	142	548	143
401.bzip2	8	1068	72.3	1067	72.4	<b>1068</b>	<b>72.3</b>	8	996	77.5	<b>996</b>	<b>77.5</b>	995	77.6
403.gcc	8	963	66.9	<b>957</b>	<b>67.3</b>	955	67.5	8	812	79.3	<b>814</b>	<b>79.1</b>	815	79.0
429.mcf	8	1068	68.3	<b>1068</b>	<b>68.3</b>	1068	68.3	8	771	94.7	<b>771</b>	<b>94.6</b>	771	94.6
445.gobmk	8	853	98.4	<b>853</b>	<b>98.3</b>	854	98.3	8	660	127	659	127	<b>659</b>	<b>127</b>
456.hammer	8	<b>570</b>	<b>131</b>	567	132	571	131	8	<b>397</b>	<b>188</b>	398	188	396	188
458.sjeng	8	914	106	<b>914</b>	<b>106</b>	914	106	8	839	115	839	115	<b>839</b>	<b>115</b>
462.libquantum	8	1121	148	<b>1121</b>	<b>148</b>	1121	148	8	1123	148	1123	148	<b>1123</b>	<b>148</b>
464.h264ref	8	1083	163	1081	164	<b>1083</b>	<b>163</b>	8	1038	171	<b>1037</b>	<b>171</b>	1032	172
471.omnetpp	8	757	66.0	<b>757</b>	<b>66.0</b>	757	66.0	8	757	66.0	<b>757</b>	<b>66.0</b>	757	66.0
473.astar	8	809	69.4	808	69.5	<b>809</b>	<b>69.5</b>	8	713	78.7	713	78.8	<b>713</b>	<b>78.8</b>
483.xalancbmk	8	604	91.4	<b>604</b>	<b>91.4</b>	604	91.4	8	<b>493</b>	<b>112</b>	494	112	493	112

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=7168 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_MORECORE = "yes"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd909gh-libs/64:/usr/cpu2006/amd909gh-libs/32"

This result was measured on the Acer Altos R5250  
The Altos R5250 and Altos G5450 are electronically equivalent.



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 111

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2009

Hardware Availability: May-2008

Software Availability: Oct-2008

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 111

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2009

Hardware Availability: May-2008

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 111

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2009

Hardware Availability: May-2008

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
 -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
 -LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
 -LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
 -Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
 --zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -L/root/work/libraries/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint\_rate2006 = 111

Acer Altos R5250 (AMD Opteron 2360 SE)

SPECint\_rate\_base2006 = 94.1

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Feb-2009

Hardware Availability: May-2008

Software Availability: Oct-2008

## Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 23:24:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 March 2009.