



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

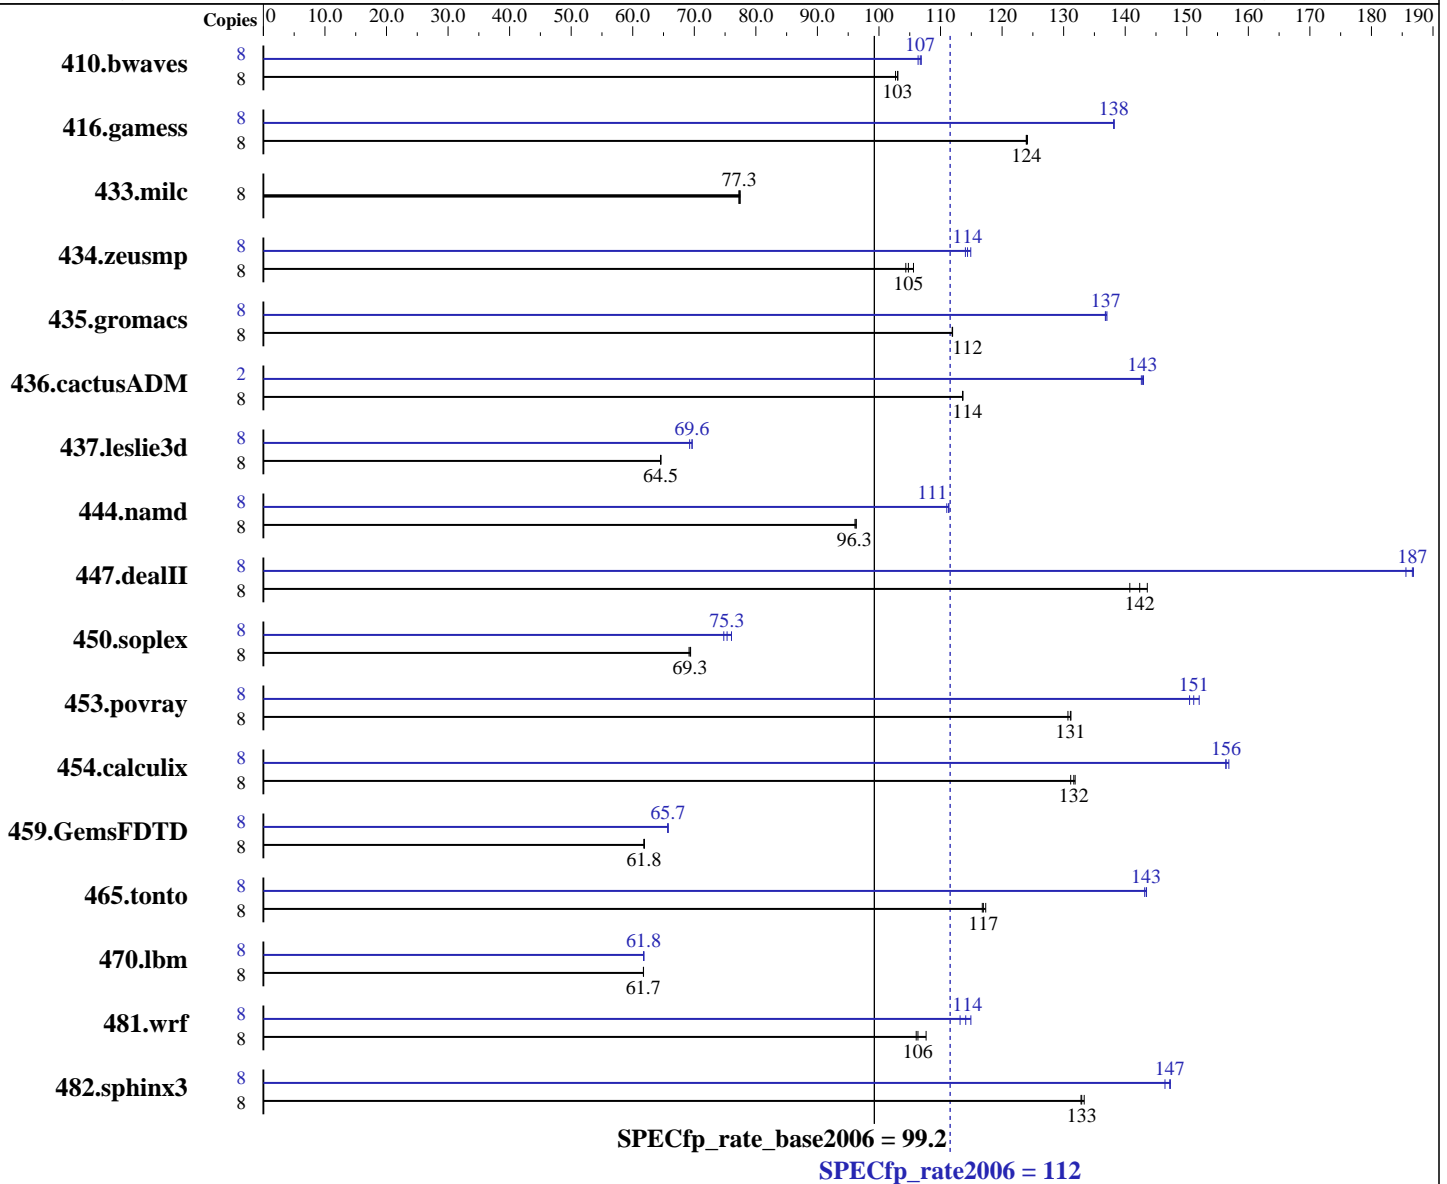

Hardware

CPU Name: AMD Opteron 2381 HE
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 10000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1055	103	<u>1055</u>	<u>103</u>	1059	103	8	<u>1019</u>	<u>107</u>	1017	107	1022	106
416.gamess	8	1264	124	1262	124	<u>1264</u>	<u>124</u>	8	1133	138	1134	138	<u>1134</u>	<u>138</u>
433.milc	8	<u>950</u>	<u>77.3</u>	951	77.2	948	77.5	8	<u>950</u>	<u>77.3</u>	951	77.2	948	77.5
434.zeusmp	8	689	106	698	104	<u>695</u>	<u>105</u>	8	634	115	638	114	<u>636</u>	<u>114</u>
435.gromacs	8	<u>510</u>	<u>112</u>	510	112	510	112	8	<u>417</u>	<u>137</u>	418	137	417	137
436.cactusADM	8	841	114	<u>841</u>	<u>114</u>	842	114	2	<u>167</u>	<u>143</u>	167	143	168	143
437.leslie3d	8	<u>1165</u>	<u>64.5</u>	1165	64.5	1165	64.6	8	1086	69.2	<u>1080</u>	<u>69.6</u>	1080	69.6
444.namd	8	<u>666</u>	<u>96.3</u>	668	96.1	666	96.3	8	578	111	576	111	<u>576</u>	<u>111</u>
447.dealII	8	<u>643</u>	<u>142</u>	650	141	637	144	8	493	186	<u>490</u>	<u>187</u>	490	187
450.soplex	8	961	69.4	965	69.1	<u>962</u>	<u>69.3</u>	8	<u>886</u>	<u>75.3</u>	892	74.8	877	76.0
453.povray	8	<u>325</u>	<u>131</u>	324	131	326	131	8	283	150	280	152	<u>282</u>	<u>151</u>
454.calculix	8	<u>501</u>	<u>132</u>	503	131	500	132	8	422	156	421	157	<u>422</u>	<u>156</u>
459.GemsFDTD	8	1371	61.9	1373	61.8	<u>1372</u>	<u>61.8</u>	8	1291	65.8	1292	65.7	<u>1291</u>	<u>65.7</u>
465.tonto	8	674	117	<u>673</u>	<u>117</u>	671	117	8	549	143	<u>549</u>	<u>143</u>	550	143
470.lbm	8	1780	61.7	1780	61.8	<u>1780</u>	<u>61.7</u>	8	1779	61.8	1779	61.8	<u>1779</u>	<u>61.8</u>
481.wrf	8	<u>840</u>	<u>106</u>	830	108	843	106	8	778	115	790	113	<u>783</u>	<u>114</u>
482.sphinx3	8	1169	133	1174	133	<u>1173</u>	<u>133</u>	8	1065	146	1058	147	<u>1059</u>	<u>147</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "4"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deall: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfpelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:
-Mipa=jobs:4(pass 2)

C++ benchmarks:
444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):
-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 112

PowerEdge M805 (AMD Opteron 2381 HE, 2.50 GHz)

SPECfp_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html
<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:06:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 May 2009.