



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint®2006 = 32.1

Asus P6T Deluxe (Intel Core i7-950)

SPECint_base2006 = 29.1

CPU2006 license: 13


Test date: Oct-2008

Test sponsor: Intel Corporation

Hardware Availability: Jun-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

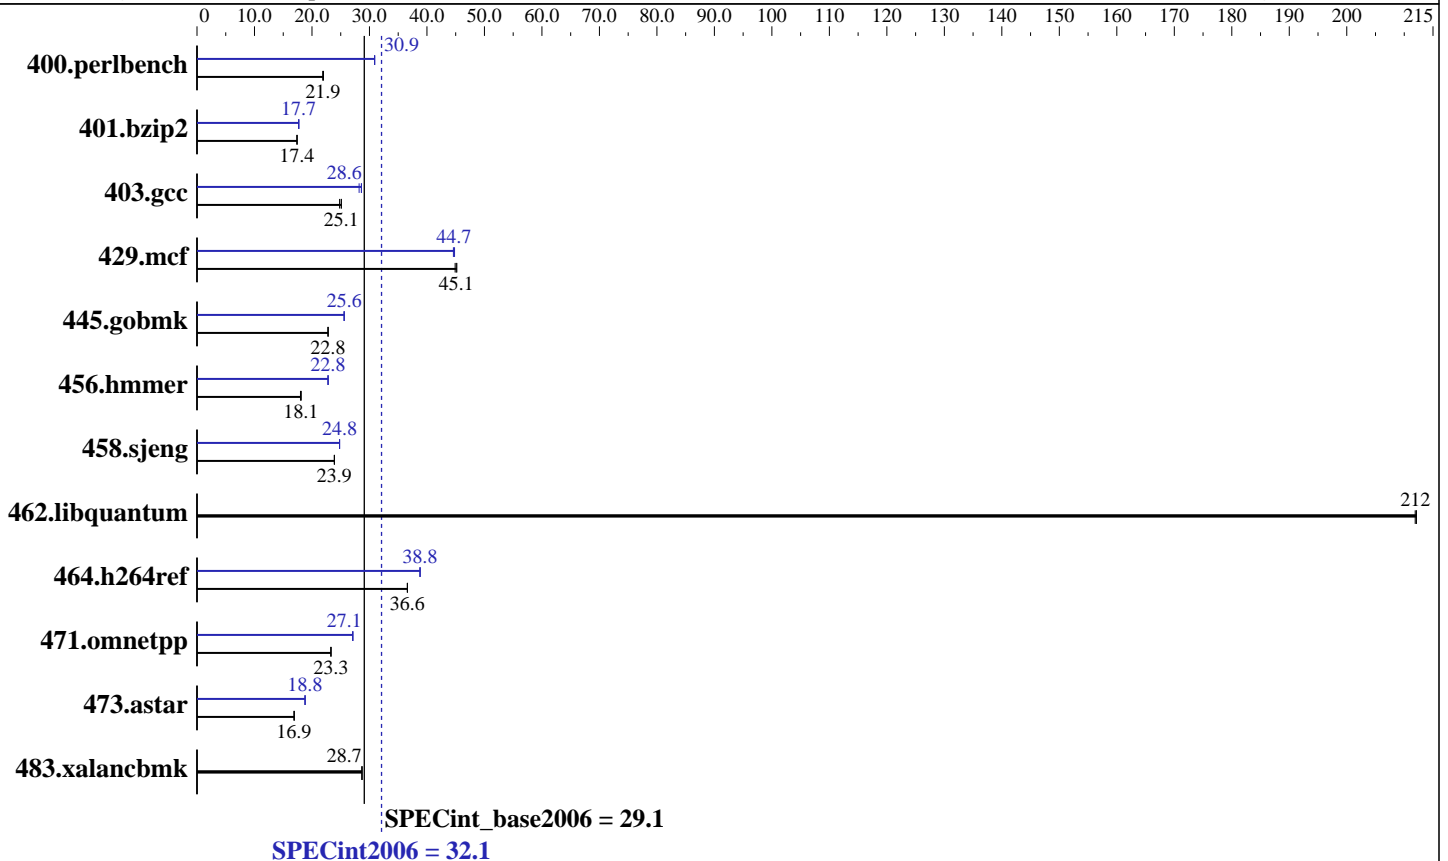

Hardware

CPU Name: Intel Core i7-950
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 3066
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
 Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 32.1

Asus P6T Deluxe (Intel Core i7-950)

SPECint_base2006 = 29.1

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Jun-2009

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	445	22.0	445	21.9	<u>445</u>	<u>21.9</u>	316	30.9	<u>316</u>	<u>30.9</u>	316	30.9
401.bzip2	554	17.4	554	17.4	<u>554</u>	<u>17.4</u>	544	17.7	<u>544</u>	<u>17.7</u>	544	17.7
403.gcc	321	25.1	<u>321</u>	<u>25.1</u>	325	24.8	282	28.6	<u>282</u>	<u>28.6</u>	285	28.2
429.mcf	202	45.2	203	44.9	<u>202</u>	<u>45.1</u>	203	44.8	<u>204</u>	<u>44.7</u>	204	44.6
445.gobmk	460	22.8	460	22.8	<u>460</u>	<u>22.8</u>	410	25.6	410	25.6	<u>410</u>	<u>25.6</u>
456.hammer	517	18.0	516	18.1	<u>516</u>	<u>18.1</u>	409	22.8	<u>409</u>	<u>22.8</u>	409	22.8
458.sjeng	506	23.9	<u>507</u>	<u>23.9</u>	507	23.9	488	24.8	<u>488</u>	<u>24.8</u>	488	24.8
462.libquantum	97.8	212	97.7	212	<u>97.7</u>	<u>212</u>	97.8	212	97.7	212	<u>97.7</u>	<u>212</u>
464.h264ref	605	36.6	<u>605</u>	<u>36.6</u>	605	36.6	571	38.8	<u>570</u>	<u>38.8</u>	570	38.8
471.omnetpp	269	23.3	<u>269</u>	<u>23.3</u>	269	23.3	231	27.1	231	27.1	<u>231</u>	<u>27.1</u>
473.astar	414	16.9	<u>414</u>	<u>16.9</u>	414	16.9	374	18.8	<u>374</u>	<u>18.8</u>	374	18.8
483.xalancbmk	240	28.7	240	28.7	<u>240</u>	<u>28.7</u>	240	28.7	240	28.7	<u>240</u>	<u>28.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 System was configured with nVidia GTX 280 discrete graphics card
 Binaries were built on Windows Vista Ultimate (32-bit)
 OMP_NUM_THREADS set to number of logical processors as seen by the OS
 KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qc99

C++ benchmarks:
 icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
 464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
 483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 32.1

Asus P6T Deluxe (Intel Core i7-950)

SPECint_base2006 = 29.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qpar-runtime-control -Qvec-guard-write /F512000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalanbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F512000000

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 32.1

Asus P6T Deluxe (Intel Core i7-950)

SPECint_base2006 = 29.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
/F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECint2006 = 32.1

Asus P6T Deluxe (Intel Core i7-950)

SPECint_base2006 = 29.1

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Jun-2009
Software Availability: Nov-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:23:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.