



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECint®2006 = 29.8**

Lenovo ThinkServer TD100x(Intel Xeon X5470)

**SPECint\_base2006 = 26.7**

CPU2006 license: 9017


Test date: May-2009

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2009

Tested by: Lenovo Group Limited

Software Availability: Apr-2009

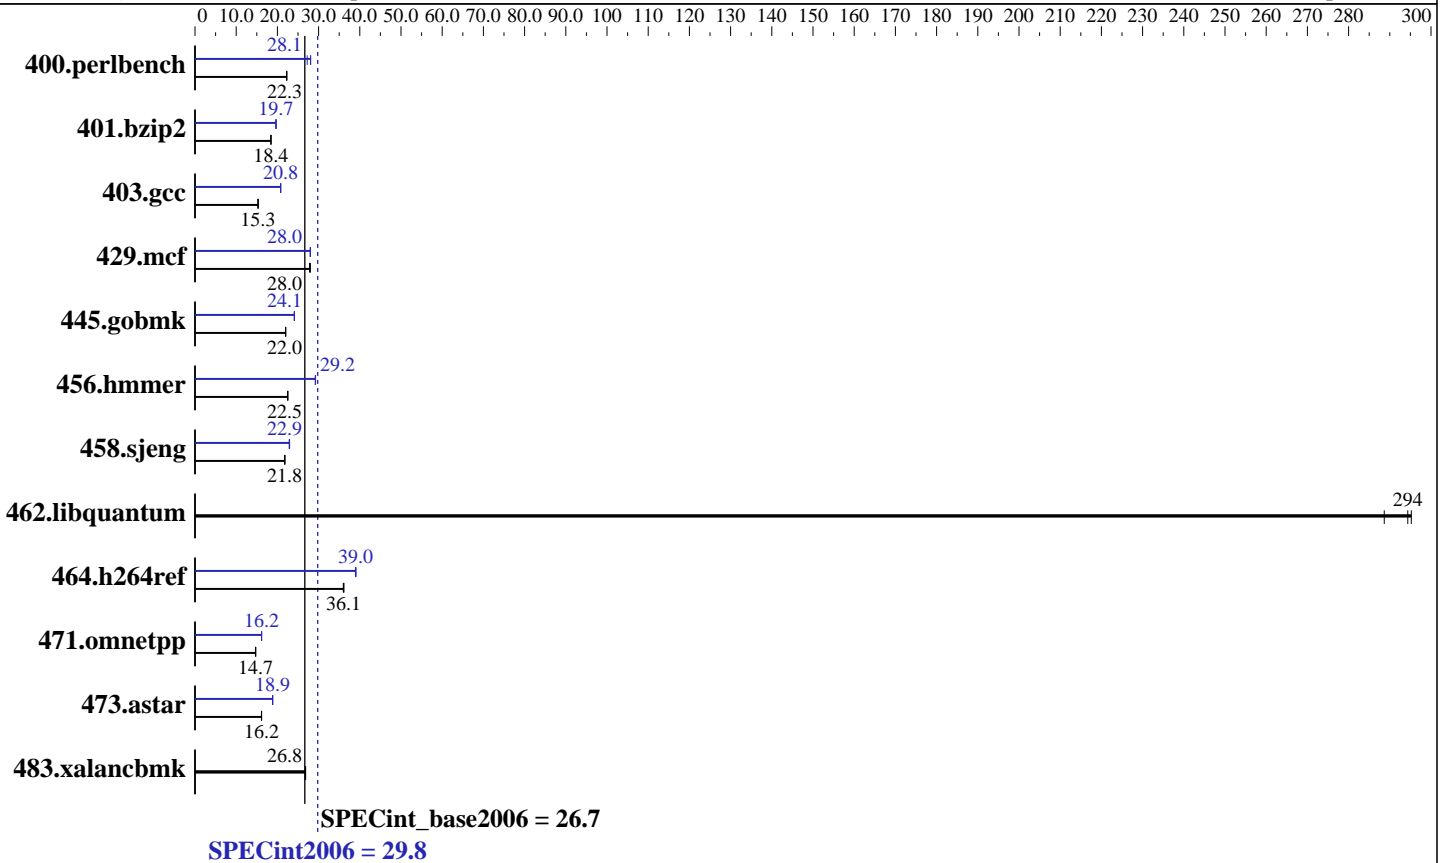

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2GB 2Rx8 PC2 5300F)

Disk Subsystem: 1 x 146 GB, SAS 15K RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP2  
 Kernel 2.6.16.60-0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux  
 Build 20090318 Package ID: l\_cproc\_b\_11.0.083  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1  
 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 29.8

Lenovo ThinkServer TD100x(Intel Xeon X5470)

SPECint\_base2006 = 26.7

CPU2006 license: 9017

Test date: May-2009

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2009

Tested by: Lenovo Group Limited

Software Availability: Apr-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	439	22.3	439	22.3	<b>439</b>	<b>22.3</b>	<b>348</b>	<b>28.1</b>	348	28.1	359	27.2
401.bzip2	524	18.4	<b>524</b>	<b>18.4</b>	523	18.5	<b>491</b>	<b>19.7</b>	491	19.6	490	19.7
403.gcc	526	15.3	<b>526</b>	<b>15.3</b>	525	15.3	388	20.8	387	20.8	<b>387</b>	<b>20.8</b>
429.mcf	328	27.8	<b>326</b>	<b>28.0</b>	326	28.0	326	28.0	326	28.0	<b>326</b>	<b>28.0</b>
445.gobmk	477	22.0	476	22.0	<b>477</b>	<b>22.0</b>	435	24.1	435	24.1	<b>435</b>	<b>24.1</b>
456.hammer	415	22.5	<b>414</b>	<b>22.5</b>	414	22.5	320	29.2	319	29.3	<b>319</b>	<b>29.2</b>
458.sjeng	556	21.8	<b>555</b>	<b>21.8</b>	555	21.8	<b>529</b>	<b>22.9</b>	527	23.0	529	22.9
462.libquantum	71.8	289	70.2	295	<b>70.4</b>	<b>294</b>	71.8	289	70.2	295	<b>70.4</b>	<b>294</b>
464.h264ref	613	36.1	<b>613</b>	<b>36.1</b>	615	36.0	566	39.1	568	39.0	<b>567</b>	<b>39.0</b>
471.omnetpp	424	14.7	<b>425</b>	<b>14.7</b>	426	14.7	<b>387</b>	<b>16.2</b>	387	16.2	387	16.1
473.astar	434	16.2	435	16.1	<b>434</b>	<b>16.2</b>	<b>372</b>	<b>18.9</b>	372	18.9	373	18.8
483.xalancbmk	<b>258</b>	<b>26.8</b>	257	26.9	258	26.8	<b>258</b>	<b>26.8</b>	257	26.9	258	26.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
Adjacent Cache Line Prefetcher: Enabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 29.8

Lenovo ThinkServer TD100x(Intel Xeon X5470)

SPECint\_base2006 = 26.7

CPU2006 license: 9017

Test date: May-2009

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2009

Tested by: Lenovo Group Limited

Software Availability: Apr-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/083/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/083/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/083/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/083/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/083/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/083/ipp/em64t/include

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 29.8

Lenovo ThinkServer TD100x(Intel Xeon X5470)

SPECint\_base2006 = 26.7

CPU2006 license: 9017

Test date: May-2009

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2009

Tested by: Lenovo Group Limited

Software Availability: Apr-2009

## Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/cpu2006/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/cpu2006/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.15.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint2006 = 29.8

Lenovo ThinkServer TD100x(Intel Xeon X5470)

SPECint\_base2006 = 26.7

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Apr-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:26:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2009.