



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019


Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

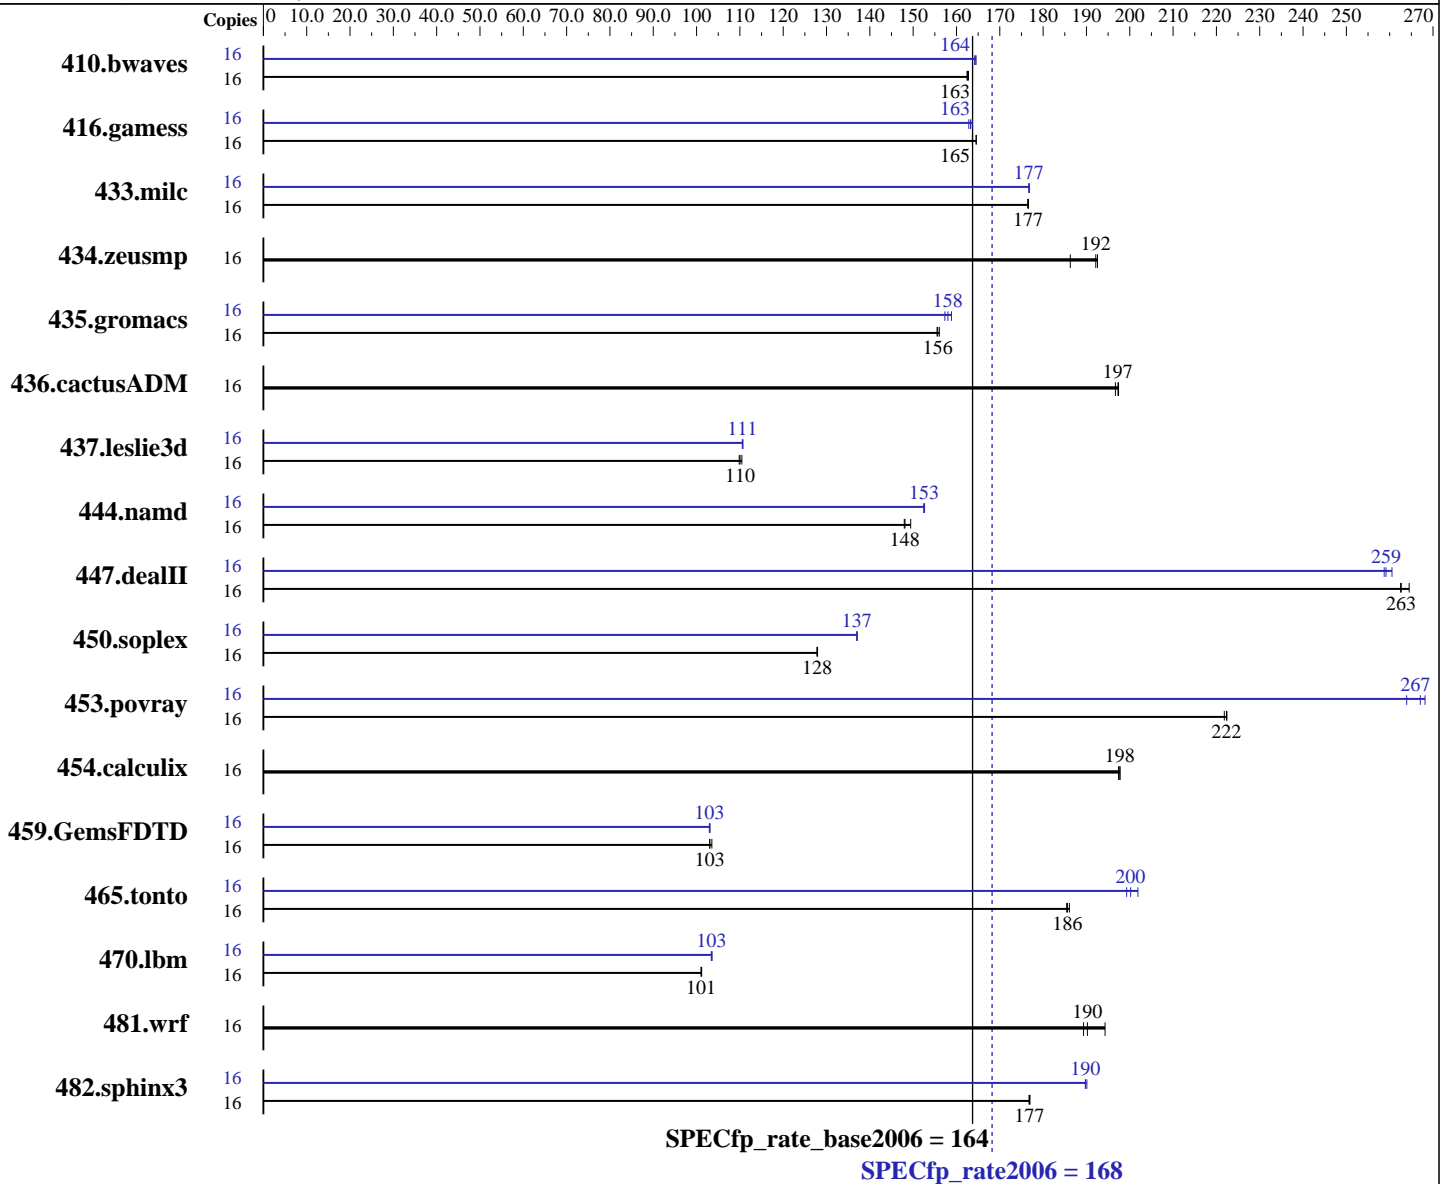

Hardware

CPU Name: Intel Xeon E5620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27-19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4GB, PC3-10600R, Dual Rank, ECC, see additional details in notes)
Disk Subsystem: 146 GB SAS, 10K RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.16.91.0.7

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1336	163	1338	163	1339	162	16	1324	164	1322	165	1323	164
416.gamess	16	1914	164	1904	165	1904	165	16	1919	163	1924	163	1915	164
433.milc	16	832	176	832	177	832	177	16	831	177	831	177	831	177
434.zeusmp	16	758	192	782	186	756	193	16	758	192	782	186	756	193
435.gromacs	16	734	156	732	156	735	156	16	719	159	726	157	723	158
436.cactusADM	16	969	197	969	197	972	197	16	969	197	969	197	972	197
437.leslie3d	16	1367	110	1369	110	1362	110	16	1358	111	1360	111	1360	111
444.namd	16	866	148	859	149	867	148	16	841	153	841	153	842	152
447.dealII	16	692	264	697	263	697	263	16	703	261	707	259	706	259
450.soplex	16	1043	128	1044	128	1044	128	16	973	137	974	137	974	137
453.povray	16	383	222	383	222	384	222	16	317	268	323	264	319	267
454.calculix	16	668	198	668	198	669	197	16	668	198	668	198	669	197
459.GemsFDTD	16	1647	103	1648	103	1640	104	16	1649	103	1648	103	1646	103
465.tonto	16	849	185	848	186	846	186	16	780	202	786	200	790	199
470.ibm	16	2173	101	2175	101	2176	101	16	2122	104	2125	103	2126	103
481.wrf	16	920	194	940	190	944	189	16	920	194	940	190	944	189
482.sphinx3	16	1763	177	1762	177	1764	177	16	1643	190	1643	190	1640	190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

ulimit -s unlimited was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1066 MHz.
BIOS Configuration : Data Reuse Optimization = Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 168

Cisco UCS B200 M2 (Intel Xeon E5620, 2.40 GHz)

SPECfp_rate_base2006 = 164

CPU2006 license: 9019

Test date: Feb-2010

Test sponsor: Cisco Systems

Hardware Availability: Apr-2010

Tested by: Cisco Systems

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100414.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revG.20100414.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:49:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 April 2010.