



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 520

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECint_rate_base2006 = 456

CPU2006 license: 11


Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

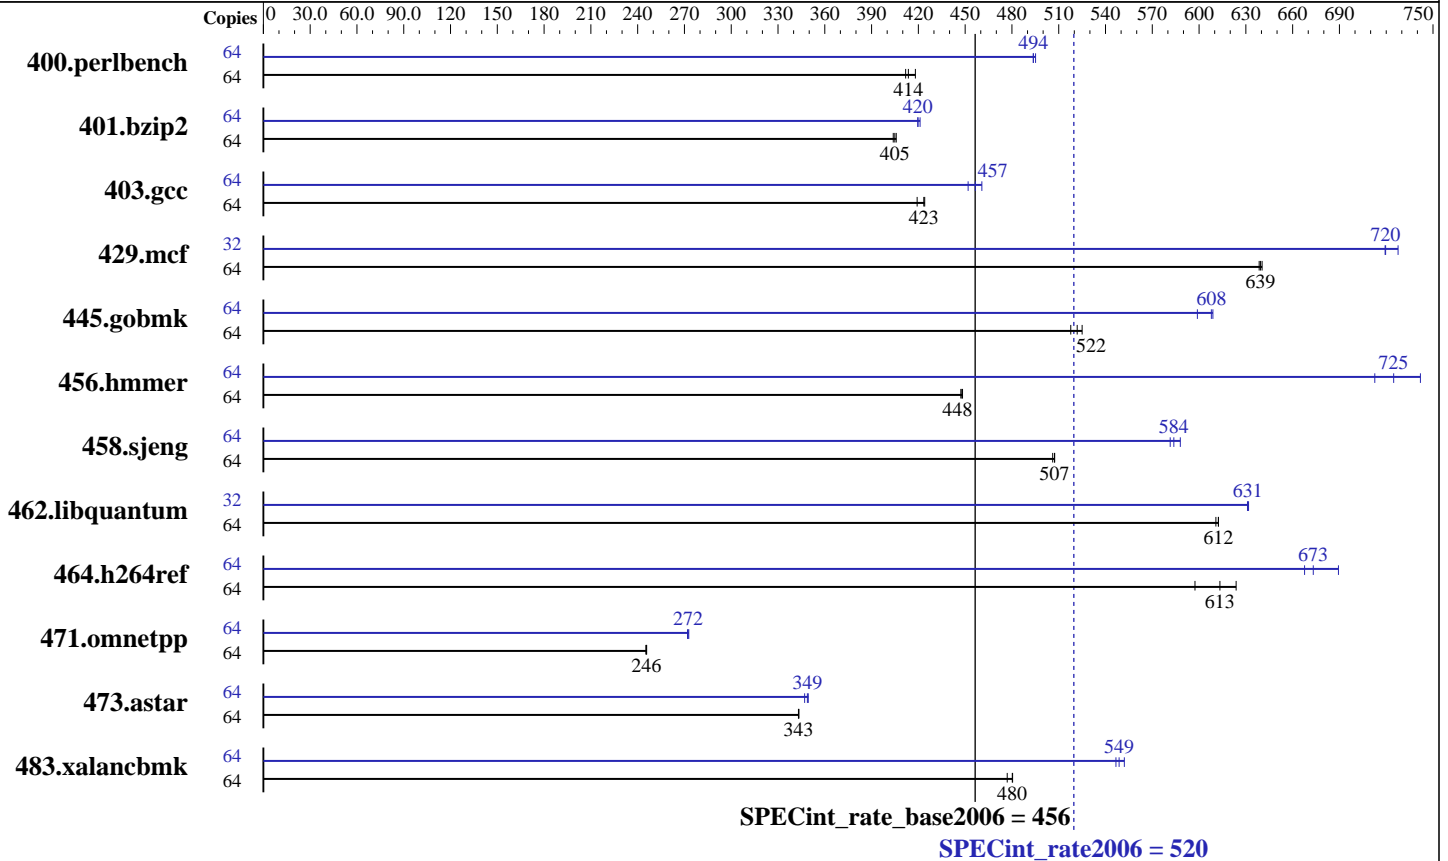

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.30 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 16 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 128 GB (32x4 GB) DDR3 1066 MHz
 Disk Subsystem: 1x300 GB SAS SFF 10K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V6.1 with the 6100-05 Technology Level SP1
 Compiler: IBM XL C/C++ for AIX, V11.1.0.1
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 520

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECint_rate_base2006 = 456

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<u>1512</u>	<u>414</u>	1496	418	1518	412	64	<u>1266</u>	<u>494</u>	1266	494	1263	495
401.bzip2	64	<u>1525</u>	<u>405</u>	1529	404	1522	406	64	1472	420	<u>1471</u>	<u>420</u>	1467	421
403.gcc	64	<u>1217</u>	<u>423</u>	1215	424	1229	419	64	1140	452	1118	461	<u>1129</u>	<u>457</u>
429.mcf	64	<u>913</u>	<u>639</u>	914	639	911	640	32	<u>406</u>	<u>720</u>	401	728	406	719
445.gobmk	64	1297	518	1279	525	<u>1287</u>	<u>522</u>	64	<u>1104</u>	<u>608</u>	1103	609	1121	599
456.hmmer	64	1332	448	<u>1333</u>	<u>448</u>	1335	447	64	<u>824</u>	<u>725</u>	805	742	838	713
458.sjeng	64	<u>1527</u>	<u>507</u>	1530	506	1526	507	64	1317	588	<u>1326</u>	<u>584</u>	1332	581
462.libquantum	64	2171	611	<u>2166</u>	<u>612</u>	2165	612	32	1051	631	<u>1050</u>	<u>631</u>	1050	632
464.h264ref	64	2271	624	<u>2309</u>	<u>613</u>	2371	597	64	<u>2104</u>	<u>673</u>	2121	668	2054	689
471.omnetpp	64	1631	245	1628	246	<u>1629</u>	<u>246</u>	64	<u>1469</u>	<u>272</u>	1466	273	1471	272
473.astar	64	<u>1309</u>	<u>343</u>	1309	343	1308	343	64	1286	349	1294	347	<u>1288</u>	<u>349</u>
483.xalancbmk	64	926	477	<u>920</u>	<u>480</u>	919	480	64	<u>805</u>	<u>549</u>	800	552	808	547

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

fdpr binary optimization tool used for:
400.perlbench 401.bzip2 462.libquantum
with options -O4 -vrox -nodp -m power7
fdpr binary optimization tool used for 403.gcc
with options -O4 -nodp -rtb -m power7
fdpr binary optimization tool used for:
429.mcf 445.gobmk 458.sjeng
with options -O3 -m power7
fdpr binary optimization tool used for:
456.hmmer 473.astar
with options -O4 -nodp -m power7
fdpr binary optimization tool used for 464.h264ref
with options -O4 -vrox -nodp -rtb -m power7
fdpr binary optimization tool used for:
471.omnetpp 483.xalancbmk
with options -O3 -lu -l -nodp -sdp 9 -m power7

```

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 520

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECint_rate_base2006 = 456

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

Operating System Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLFRTEOPTS = "intrinths=1"

all ulimits set to unlimited.

4096 16M large pages defined with vmo command

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi
-qalloca -blpdata

C++ benchmarks:

-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 520

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECint_rate_base2006 = 456

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi
-blpdata -btextpsize:64K
401.bzip2: -bmaxdata:0x4fffffff -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -blpdata
403.gcc: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qsimd -qvecnv1 -qlargepage -D_ILS_MACROS -qalloca
-blpdata
429.mcf: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qsimd -qvecnv1 -qlargepage -D_ILS_MACROS -blpdata
445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd -qvecnv1
-qlargepage -D_ILS_MACROS -blpdata
456.hmmer: -O5 -qsimd -qvecnv1 -qassert=refalign -D_ILS_MACROS
-blpdata -btextpsize:64K
458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -blpdata
462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -qlargepage
-D_ILS_MACROS -blpdata
464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd -qvecnv1
-D_ILS_MACROS -blpdata -btextpsize:64K

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 520

IBM BladeCenter PS702 Express (3.0 GHz, 16 core)

SPECint_rate_base2006 = 456

CPU2006 license: 11

Test date: Mar-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Apr-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qinlglue -qalign=natural
-blpdata

483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qarch=pwr5 -qtune=pwr5 -qlargepage -D_ILS_MACROS
-qinlglue -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks (except as noted below):

-qipa=threads -qipa=noobject -qsuppress=1500-036

471.omnetpp: -qipa=threads -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

<http://www.spec.org/cpu2006/flags/IBM-XL.20100427.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

<http://www.spec.org/cpu2006/flags/IBM-XL.20100427.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 07:25:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2010.