



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp<sup>®</sup>2006 = 42.4

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = 39.7

CPU2006 license: 001176


Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

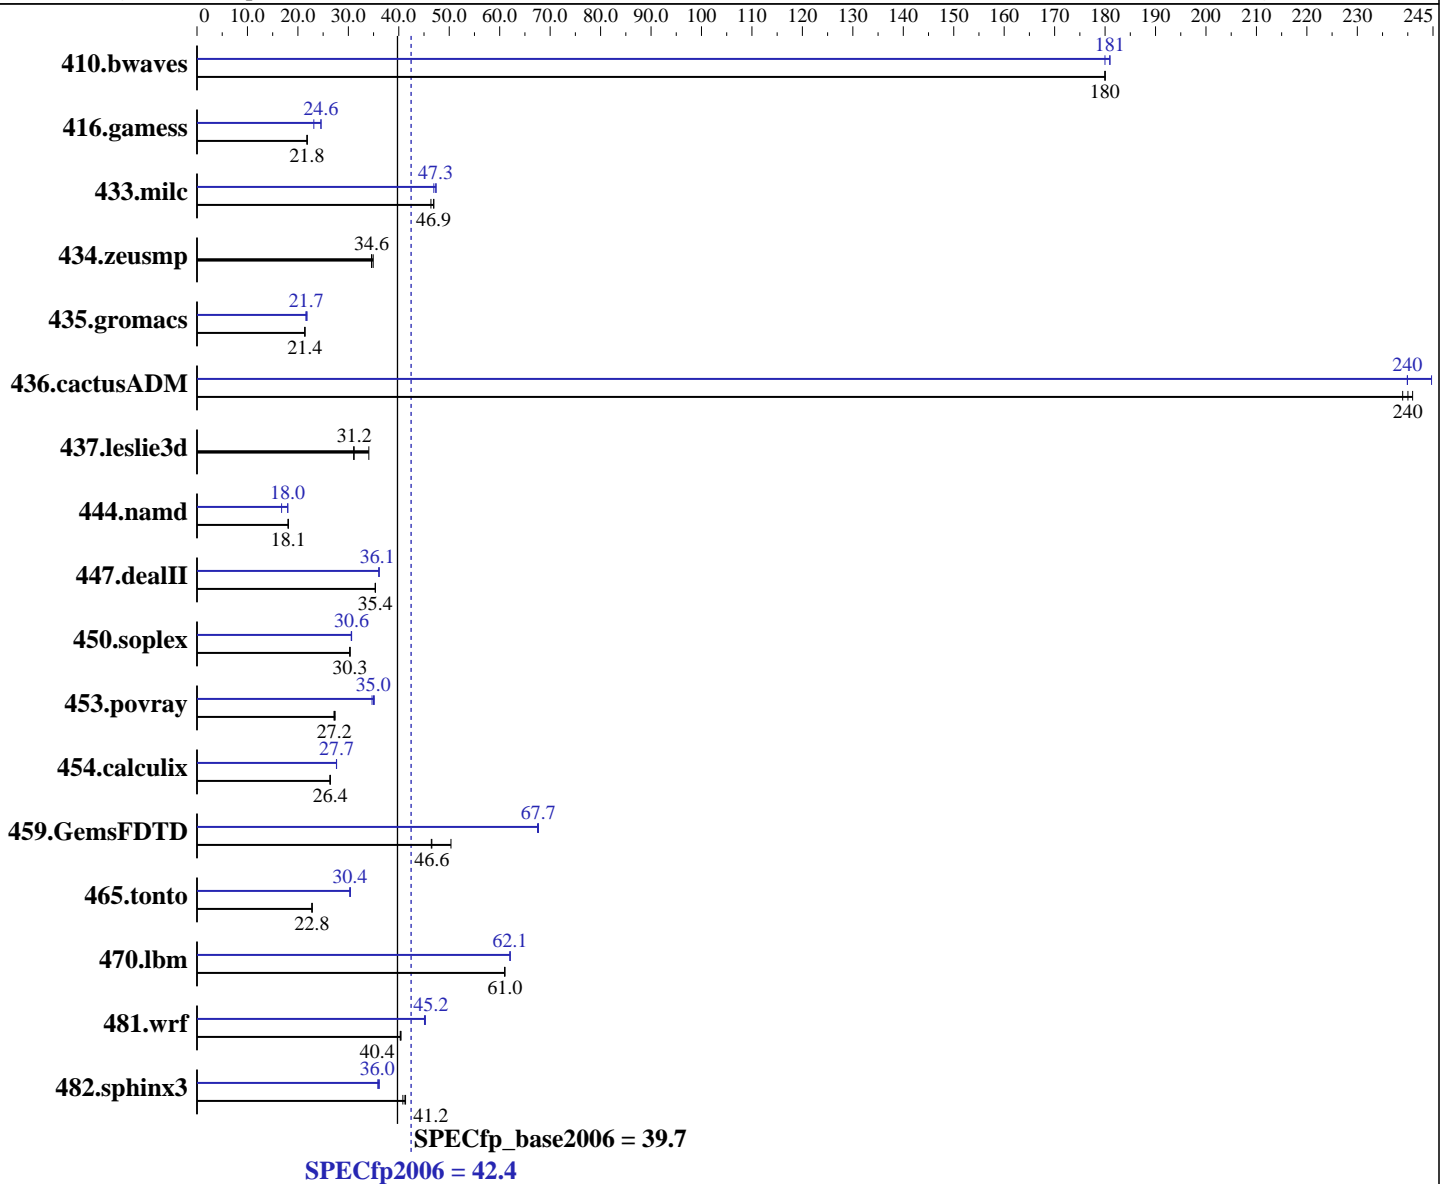

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2666  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **42.4**

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = **39.7**

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	75.5	180	<b><u>75.5</u></b>	<b><u>180</u></b>	75.5	180	75.5	180	<b><u>75.1</u></b>	<b><u>181</u></b>	75.1	181
416.gamess	897	21.8	<b><u>897</u></b>	<b><u>21.8</u></b>	896	21.8	796	24.6	<b><u>797</u></b>	<b><u>24.6</u></b>	846	23.2
433.milc	196	46.9	198	46.4	<b><u>196</u></b>	<b><u>46.9</u></b>	194	47.4	196	46.9	<b><u>194</u></b>	<b><u>47.3</u></b>
434.zeusmp	261	34.9	263	34.6	<b><u>263</u></b>	<b><u>34.6</u></b>	261	34.9	263	34.6	<b><u>263</u></b>	<b><u>34.6</u></b>
435.gromacs	334	21.4	<b><u>334</u></b>	<b><u>21.4</u></b>	334	21.4	327	21.8	<b><u>329</u></b>	<b><u>21.7</u></b>	331	21.6
436.cactusADM	49.6	241	<b><u>49.8</u></b>	<b><u>240</u></b>	50.0	239	49.8	240	<b><u>49.8</u></b>	<b><u>240</u></b>	48.8	245
437.leslie3d	303	31.0	276	34.1	<b><u>302</u></b>	<b><u>31.2</u></b>	303	31.0	276	34.1	<b><u>302</u></b>	<b><u>31.2</u></b>
444.namd	443	18.1	444	18.1	<b><u>443</u></b>	<b><u>18.1</u></b>	478	16.8	<b><u>446</u></b>	<b><u>18.0</u></b>	446	18.0
447.dealII	<b><u>324</u></b>	<b><u>35.4</u></b>	324	35.3	324	35.4	317	36.1	317	36.1	<b><u>317</u></b>	<b><u>36.1</u></b>
450.soplex	275	30.3	275	30.3	<b><u>275</u></b>	<b><u>30.3</u></b>	<b><u>272</u></b>	<b><u>30.6</u></b>	272	30.7	273	30.6
453.povray	<b><u>195</u></b>	<b><u>27.2</u></b>	194	27.4	196	27.2	151	35.1	153	34.7	<b><u>152</u></b>	<b><u>35.0</u></b>
454.calculix	<b><u>312</u></b>	<b><u>26.4</u></b>	312	26.4	313	26.3	298	27.7	<b><u>298</u></b>	<b><u>27.7</u></b>	298	27.6
459.GemsFDTD	228	46.4	<b><u>228</u></b>	<b><u>46.6</u></b>	211	50.3	157	67.5	157	67.7	<b><u>157</u></b>	<b><u>67.7</u></b>
465.tonto	431	22.8	<b><u>432</u></b>	<b><u>22.8</u></b>	432	22.8	<b><u>324</u></b>	<b><u>30.4</u></b>	324	30.4	325	30.3
470.lbm	225	61.0	<b><u>225</u></b>	<b><u>61.0</u></b>	225	61.0	221	62.1	221	62.1	<b><u>221</u></b>	<b><u>62.1</u></b>
481.wrf	277	40.3	276	40.4	<b><u>277</u></b>	<b><u>40.4</u></b>	<b><u>247</u></b>	<b><u>45.2</u></b>	248	45.1	247	45.3
482.sphinx3	471	41.3	478	40.8	<b><u>473</u></b>	<b><u>41.2</u></b>	<b><u>542</u></b>	<b><u>36.0</u></b>	539	36.1	544	35.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M

## Platform Notes

Fan speed set to Full Speed in BIOS Setup.  
 As tested, the system used a Supermicro  
 PWS-865-PQ power supply, 2 SNK-P0038P heatsinks,  
 and 2 FAN-0077L cooling fans.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.4

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = 39.7

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.4

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = 39.7

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: May-2010  
Hardware Availability: Mar-2010  
Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.4

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = 39.7

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 42.4

Motherboard X8DTE-F (Intel Xeon X5650, 2.66 GHz)

SPECfp\_base2006 = 39.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Mar-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:02:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 June 2010.