



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Oracle Corporation

### SPECint®\_rate2006 = 346

### Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

### SPECint\_rate\_base2006 = 311

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2010

Hardware Availability: May-2010

Software Availability: Jun-2010

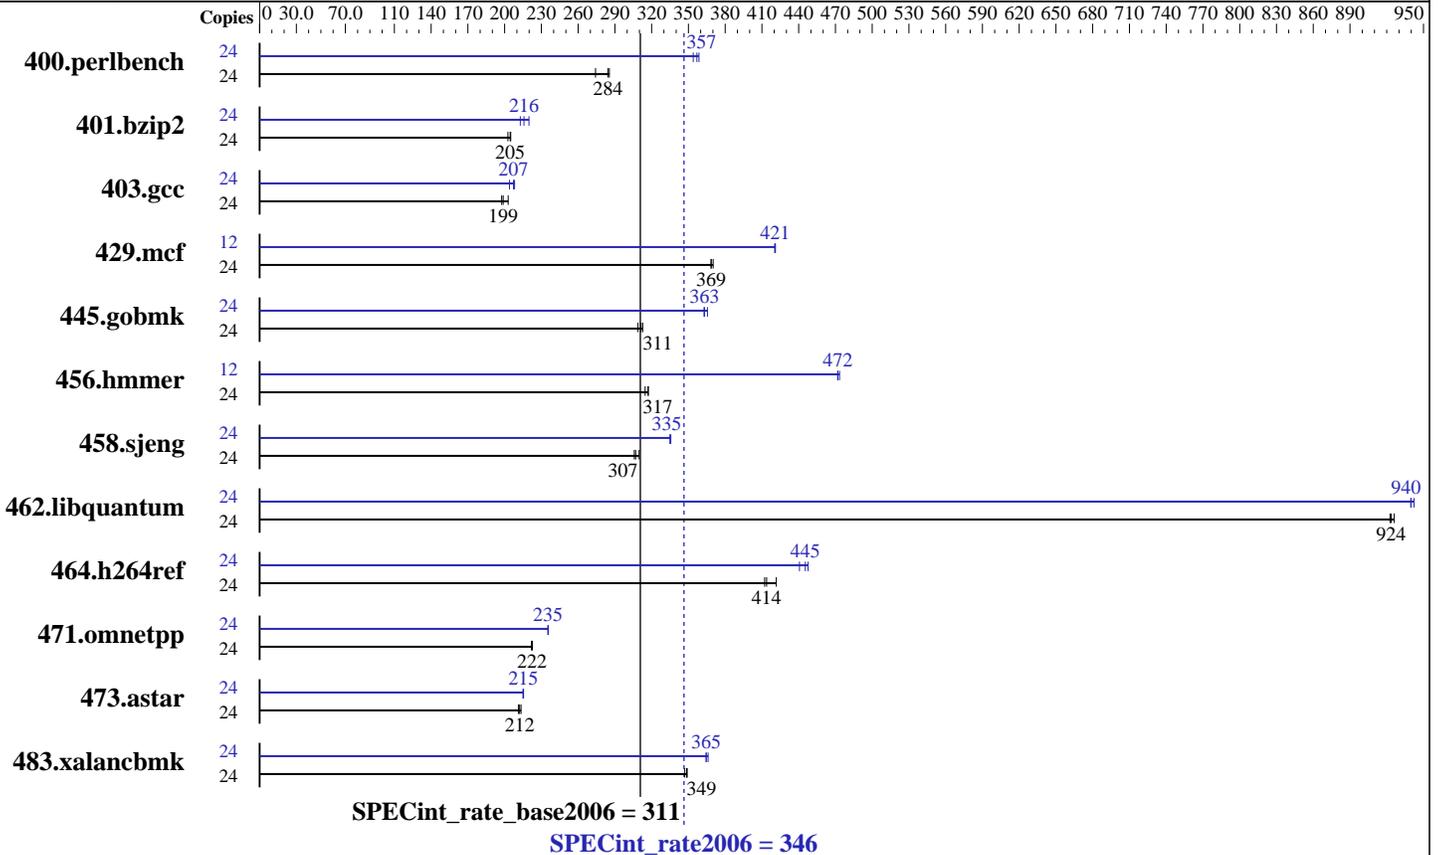

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 or 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 CL9, 2 Rank, ECC)  
 Disk Subsystem: 1 x 1 TB, SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Oracle Solaris 10 10/09  
 Compiler: Oracle Solaris Studio Express 6/10  
 Auto Parallel: No  
 File System: zfs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap Library 9.01 for x64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 346

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECint\_rate\_base2006 = 311

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Jun-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	855	274	821	285	<u>825</u>	<u>284</u>	24	662	354	<u>657</u>	<u>357</u>	654	359
401.bzip2	24	1143	203	1130	205	<u>1132</u>	<u>205</u>	24	1088	213	<u>1073</u>	<u>216</u>	1053	220
403.gcc	24	952	203	<u>972</u>	<u>199</u>	978	198	24	947	204	928	208	<u>932</u>	<u>207</u>
429.mcf	24	591	370	594	369	<u>594</u>	<u>369</u>	12	260	420	260	421	<u>260</u>	<u>421</u>
445.gobmk	24	805	313	815	309	<u>808</u>	<u>311</u>	24	694	363	689	366	<u>693</u>	<u>363</u>
456.hammer	24	706	317	<u>706</u>	<u>317</u>	712	315	12	237	473	<u>237</u>	<u>472</u>	237	472
458.sjeng	24	<u>946</u>	<u>307</u>	950	306	938	310	24	<u>867</u>	<u>335</u>	865	336	867	335
462.libquantum	24	<u>538</u>	<u>924</u>	539	923	537	926	24	<u>529</u>	<u>940</u>	529	940	528	942
464.h264ref	24	1288	412	<u>1283</u>	<u>414</u>	1259	422	24	1205	441	<u>1192</u>	<u>445</u>	1186	448
471.omnetpp	24	676	222	674	223	<u>675</u>	<u>222</u>	24	637	235	<u>637</u>	<u>235</u>	637	236
473.astar	24	790	213	798	211	<u>794</u>	<u>212</u>	24	<u>782</u>	<u>215</u>	782	215	784	215
483.xalancbmk	24	474	349	<u>475</u>	<u>349</u>	477	347	24	452	366	<u>454</u>	<u>365</u>	454	364

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

```

ulimit -s unlimited (shell)

/etc/system parameters
tune_t_fsflushr=10
autoup=900
zfs:zfs_arc_max = 0x10000000
lpg_alloc_prefer=1

```

## Platform Notes

Default BIOS settings used

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 346

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECint\_rate\_base2006 = 311

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Mar-2010

Hardware Availability: May-2010

Software Availability: Jun-2010

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_IA32
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```

## Base Optimization Flags

C benchmarks:

```
-fast -xtarget=nehalem -xipo=2 -xpagesize=2M
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-fast -xtarget=nehalem -xipo=2 -xpagesize=2M -xvector=simd
-xalias_level=compatible
-L/data1/SmartHeap_9/lib -R/data1/SmartHeap_9/lib -lsmartheap
-library=stlport4
```

## Base Other Flags

C benchmarks:

```
-V -# -xjobs=24
```

C++ benchmarks:

```
-verbose=diags,version -xjobs=24
```

## Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 346

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECint\_rate\_base2006 = 311

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Jun-2010

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=1 -m64 -xalias\_level=std -lbsdmalloc -lumem

401.bzip2: -fast -xtarget=nehalem -xipo=2 -m64 -xpagesize=2M  
-xalias\_level=std -lumem

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -xpagesize=2M -W2,-Rujam -W2,-Rtile

429.mcf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m32 -xpagesize=2M -xalias\_level=strong  
-xprefetch=no%auto -lbsdmalloc

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-m64 -xpagesize=2M -xrestrict -xalias\_level=strong  
-xdepend

456.hmmer: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m64

458.sjeng: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m64 -xpagesize=2M -xalias\_level=strong

462.libquantum: -fast -xtarget=nehalem -xipo=2 -m64 -xalias\_level=std

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m64 -xalias\_level=strong -xrestrict

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -xpagesize=2M -library=stlport4  
-L/data1/SmartHeap\_9/lib -R/data1/SmartHeap\_9/lib -lsmartheap

473.astar: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem  
-xipo=2 -m64 -xpagesize=2M -xalias\_level=compatible  
-library=stlport4  
-L/data1/SmartHeap\_9/lib -R/data1/SmartHeap\_9/lib -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECint\_rate2006 = 346

Sun Fire X2270 M2 (Intel Xeon X5670 2.93GHz)

SPECint\_rate\_base2006 = 311

CPU2006 license: 6

Test date: Mar-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Jun-2010

## Peak Optimization Flags (Continued)

```
483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem
-xipo=2 -xunroll=2 -xpagesize=2M -xalias_level=compatible
-L/data1/SmartHeap_9/lib -R/data1/SmartHeap_9/lib -lsmartheap
-library=stlport4
```

## Peak Other Flags

C benchmarks:  
-V -# -xjobs=24

C++ benchmarks:  
-verbose=diags,version -xjobs=24

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86\\_64.html](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86\\_64.xml](http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio-x86_64.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 13:13:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2010.