



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

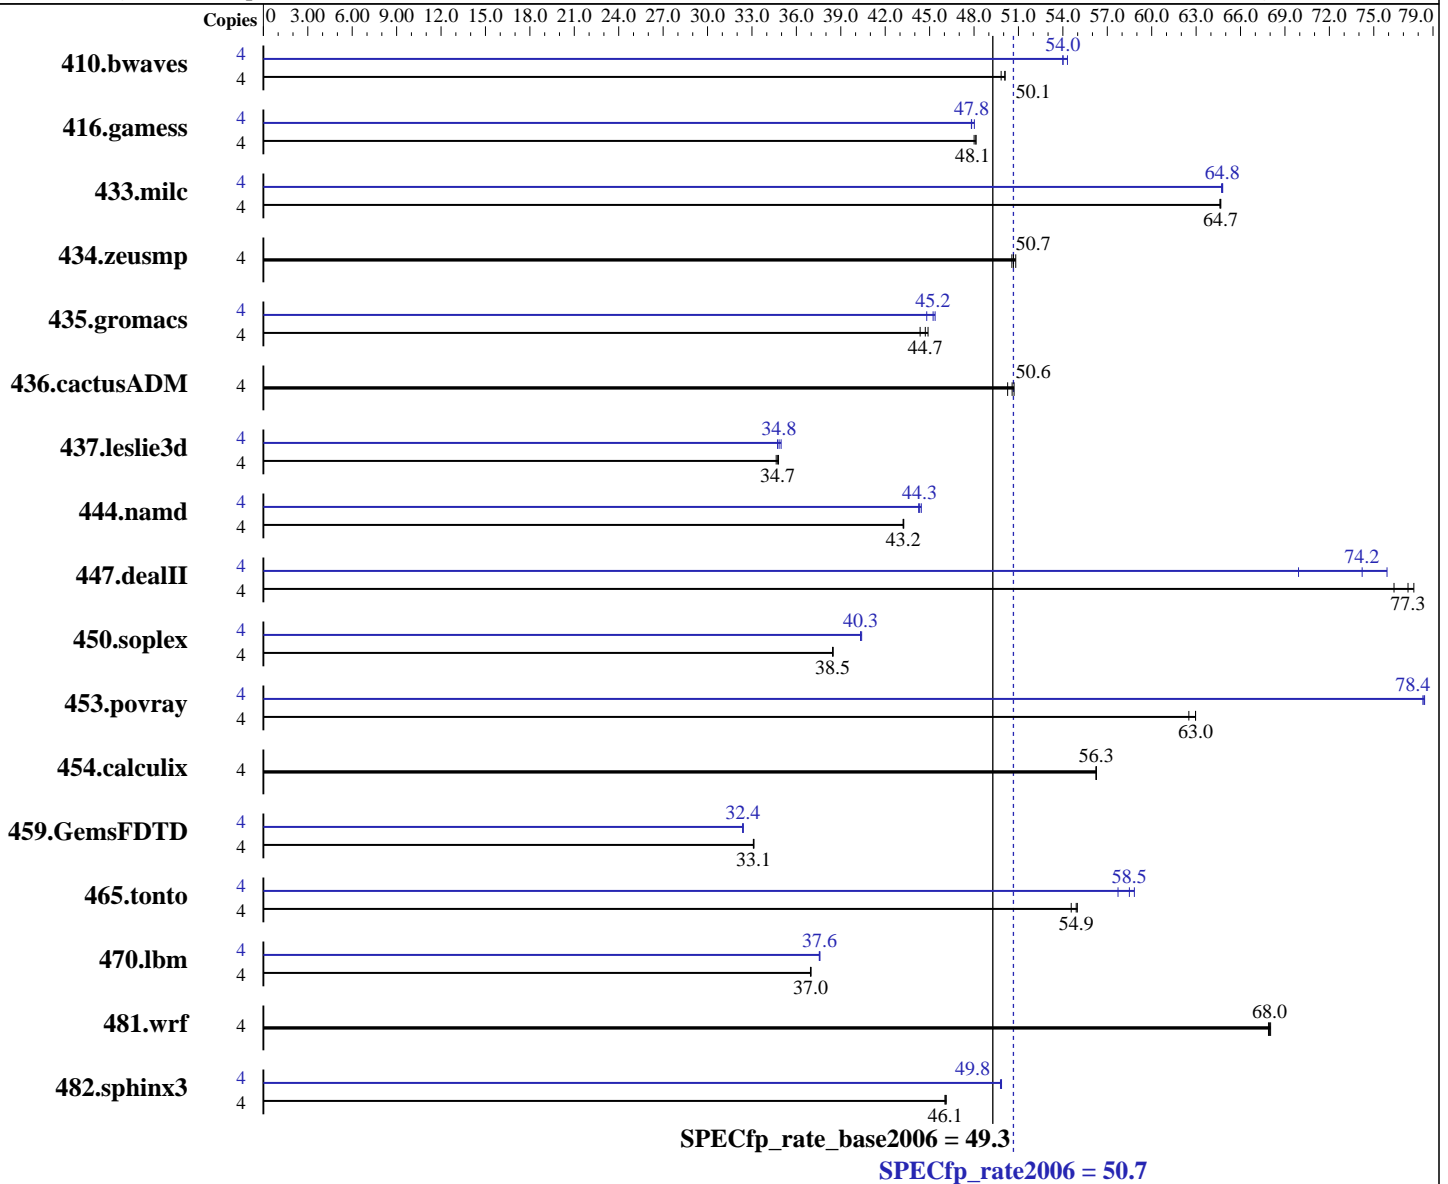

Hardware

CPU Name: Intel Core i3-530
 CPU Characteristics: 2933
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 DDR3-1333 UDIMM, ECC, CL9)
Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1085	50.1	1086	50.1	1091	49.8	4	1001	54.3	1007	54.0	1006	54.0
416.gamess	4	1627	48.1	1627	48.1	1631	48.0	4	1638	47.8	1631	48.0	1637	47.8
433.milc	4	568	64.7	568	64.7	568	64.6	4	567	64.8	567	64.8	567	64.7
434.zeusmp	4	716	50.8	718	50.7	720	50.6	4	716	50.8	718	50.7	720	50.6
435.gromacs	4	636	44.9	639	44.7	644	44.4	4	637	44.8	629	45.4	631	45.2
436.cactusADM	4	945	50.6	943	50.7	951	50.3	4	945	50.6	943	50.7	951	50.3
437.leslie3d	4	1082	34.7	1081	34.8	1086	34.6	4	1083	34.7	1075	35.0	1079	34.8
444.namd	4	742	43.3	742	43.2	742	43.2	4	722	44.4	725	44.3	724	44.3
447.dealII	4	592	77.3	599	76.4	589	77.7	4	617	74.2	603	75.9	654	69.9
450.soplex	4	867	38.5	868	38.4	867	38.5	4	827	40.3	826	40.4	827	40.3
453.povray	4	340	62.5	338	63.0	338	63.0	4	272	78.3	271	78.4	271	78.4
454.calculix	4	586	56.3	587	56.3	587	56.2	4	586	56.3	587	56.3	587	56.2
459.GemsFDTD	4	1282	33.1	1282	33.1	1281	33.1	4	1310	32.4	1309	32.4	1311	32.4
465.tonto	4	717	54.9	716	55.0	721	54.6	4	669	58.8	673	58.5	682	57.7
470.lbm	4	1486	37.0	1487	37.0	1487	37.0	4	1462	37.6	1463	37.6	1464	37.5
481.wrf	4	657	68.0	658	67.9	657	68.0	4	657	68.0	658	67.9	657	68.0
482.sphinx3	4	1690	46.1	1693	46.1	1693	46.0	4	1564	49.9	1564	49.8	1566	49.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro CSE-815TQ-330UB chassis.
The chassis is bundled with a PWS-333-1H20 power supply, a SNK-P0046P heatsink, and 4 FAN-0086L4 cooling fans.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 50.7

Motherboard X8SIU-F (Intel Core i3-530, 2.93 GHz)

SPECfp_rate_base2006 = 49.3

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100915.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:24:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.