



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp[®]_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176


Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

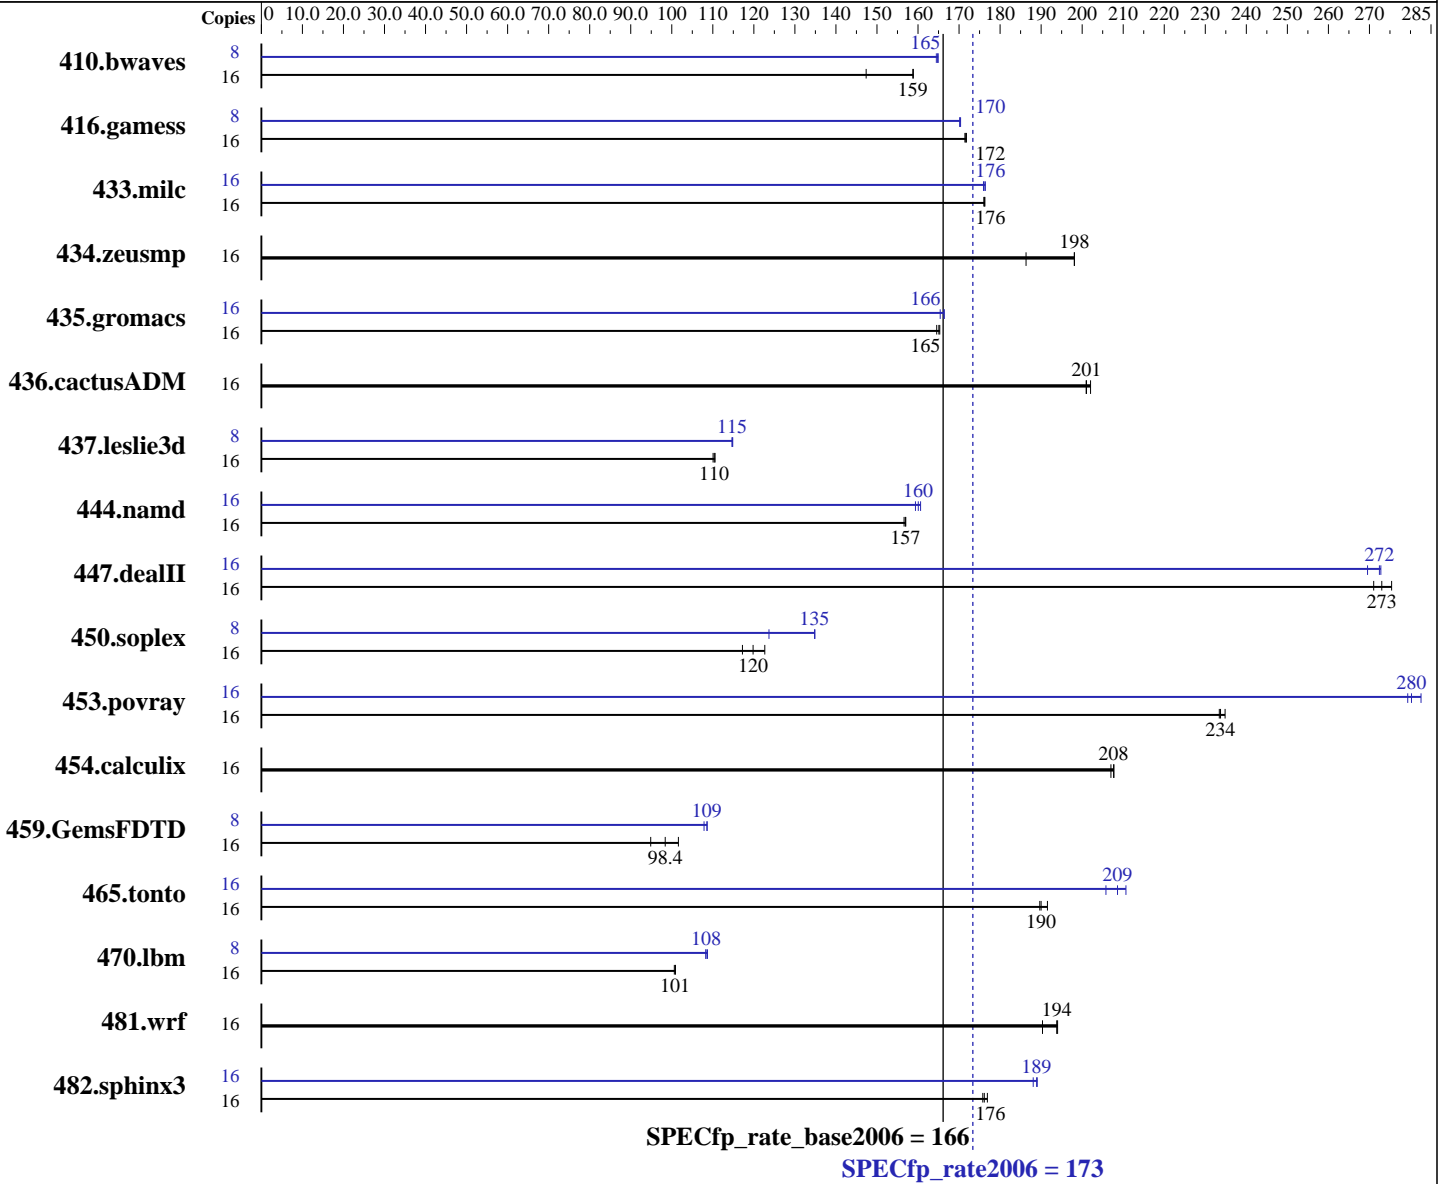

Hardware

CPU Name: Intel Xeon E5630
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux 5 (x86_64)
 Kernel-2.6.18-194.el5.x86_64
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9, downclocked to 1066 MHz)
 Disk Subsystem: 1 x 320 GB SATA II, 7200 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1476	147	1369	159	1370	159	8	659	165	660	165	661	164		
416.gamess	16	1823	172	1825	172	1828	171	8	920	170	920	170	919	170		
433.milc	16	834	176	833	176	833	176	16	834	176	835	176	833	176		
434.zeusmp	16	735	198	735	198	781	186	16	735	198	735	198	781	186		
435.gromacs	16	694	165	692	165	691	165	16	687	166	687	166	691	165		
436.cactusADM	16	951	201	951	201	946	202	16	951	201	951	201	946	202		
437.leslie3d	16	1360	111	1366	110	1363	110	8	655	115	655	115	656	115		
444.namd	16	817	157	818	157	819	157	16	799	161	805	159	802	160		
447.dealII	16	665	275	670	273	675	271	16	672	272	679	270	671	273		
450.soplex	16	1114	120	1138	117	1088	123	8	539	124	495	135	495	135		
453.povray	16	362	235	365	233	364	234	16	304	280	301	283	305	279		
454.calculix	16	638	207	636	208	635	208	16	638	207	636	208	635	208		
459.GemsFDTD	16	1789	94.9	1725	98.4	1671	102	8	781	109	782	109	787	108		
465.tonto	16	822	192	830	190	829	190	16	755	209	765	206	747	211		
470.lbm	16	2180	101	2185	101	2179	101	8	1011	109	1015	108	1015	108		
481.wrf	16	921	194	922	194	939	190	16	921	194	922	194	939	190		
482.sphinx3	16	1763	177	1774	176	1770	176	16	1658	188	1651	189	1649	189		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a ABLECOM
SP645-PS power supply, 2 SNK-P0035AP4 heatsinks,

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2010
Hardware Availability: Mar-2010
Software Availability: Jan-2010

Platform Notes (Continued)

along with 4 Nidec UltraFlo T92T12MMA7-57 T072.

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 173

Motherboard X8DTL-iF (Intel Xeon E5630, 2.53 GHz)

SPECfp_rate_base2006 = 166

CPU2006 license: 001176

Test date: Jun-2010

Test sponsor: Supermicro

Hardware Availability: Mar-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:43:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.