



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint<sup>®</sup>2006 = 20.2**

PRIMERGY TX100 S2, Intel Celeron G1101, 2.27 GHz

**SPECint\_base2006 = 18.6**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jul-2010

Hardware Availability: Aug-2010

Software Availability: May-2010

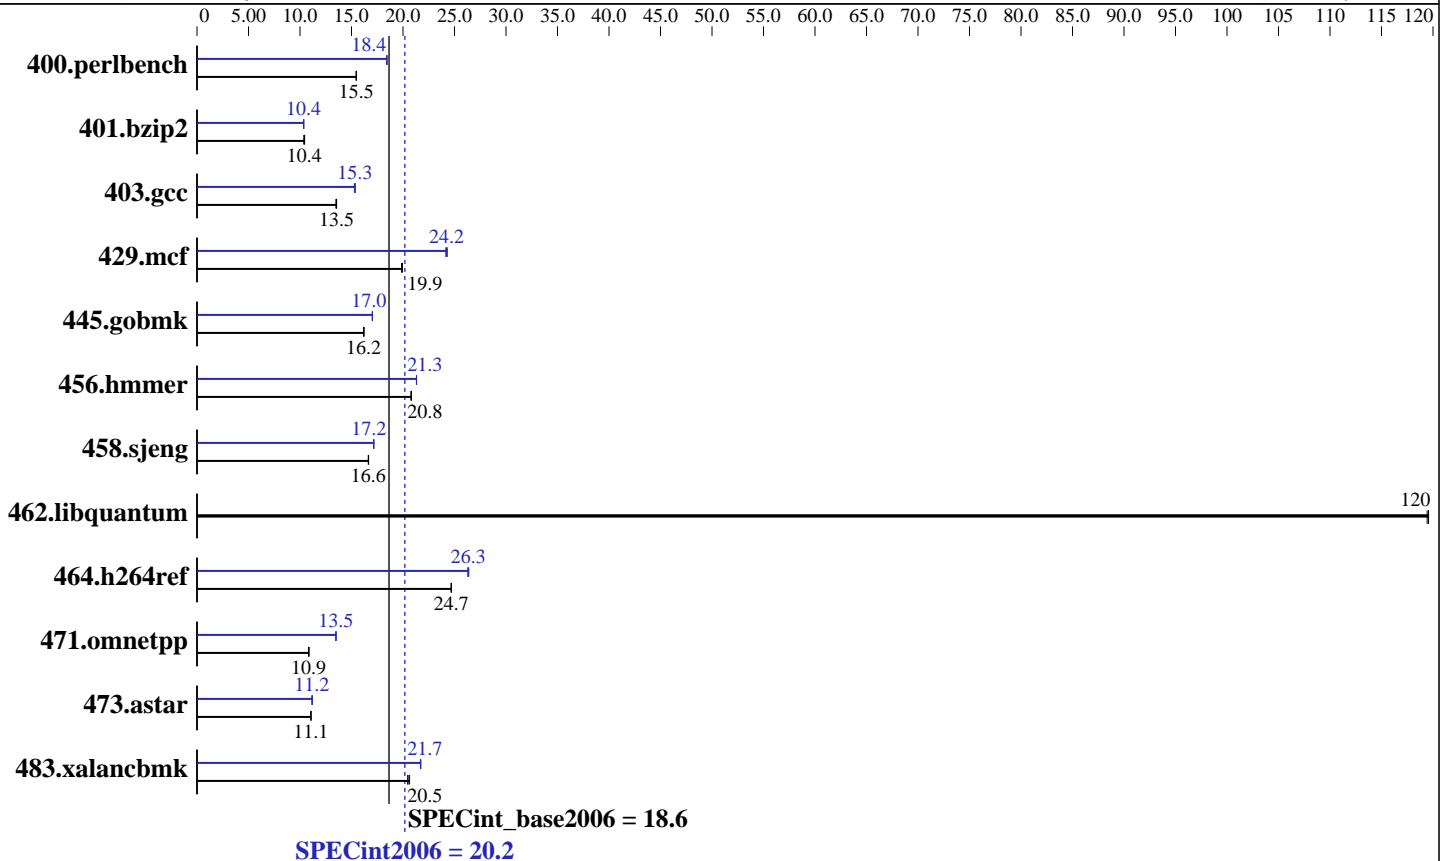

### Hardware

CPU Name: Intel Celeron G1101  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4x4 GB PC3-10600E, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Multi-User Run Level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint2006 = **20.2**

PRIMERGY TX100 S2, Intel Celeron G1101, 2.27 GHz

SPECint\_base2006 = **18.6**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jul-2010  
Hardware Availability: Aug-2010  
Software Availability: May-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>632</u></b>	<b><u>15.5</u></b>	631	15.5	632	15.4	<b><u>530</u></b>	<b><u>18.4</u></b>	530	18.4	530	18.4
401.bzip2	923	10.4	<b><u>927</u></b>	<b><u>10.4</u></b>	930	10.4	930	10.4	<b><u>932</u></b>	<b><u>10.4</u></b>	932	10.4
403.gcc	<b><u>594</u></b>	<b><u>13.5</u></b>	594	13.6	597	13.5	<b><u>525</u></b>	<b><u>15.3</u></b>	524	15.4	527	15.3
429.mcf	457	19.9	<b><u>459</u></b>	<b><u>19.9</u></b>	459	19.9	378	24.2	375	24.3	<b><u>376</u></b>	<b><u>24.2</u></b>
445.gobmk	647	16.2	<b><u>648</u></b>	<b><u>16.2</u></b>	648	16.2	<b><u>616</u></b>	<b><u>17.0</u></b>	616	17.0	616	17.0
456.hammer	<b><u>449</u></b>	<b><u>20.8</u></b>	448	20.8	449	20.8	438	21.3	438	21.3	<b><u>438</u></b>	<b><u>21.3</u></b>
458.sjeng	726	16.7	727	16.6	<b><u>727</u></b>	<b><u>16.6</u></b>	706	17.1	<b><u>705</u></b>	<b><u>17.2</u></b>	705	17.2
462.libquantum	173	119	<b><u>173</u></b>	<b><u>120</u></b>	173	120	173	119	<b><u>173</u></b>	<b><u>120</u></b>	173	120
464.h264ref	896	24.7	<b><u>896</u></b>	<b><u>24.7</u></b>	897	24.7	842	26.3	839	26.4	<b><u>840</u></b>	<b><u>26.3</u></b>
471.omnetpp	574	10.9	<b><u>576</u></b>	<b><u>10.9</u></b>	577	10.8	<b><u>463</u></b>	<b><u>13.5</u></b>	463	13.5	464	13.5
473.astar	<b><u>634</u></b>	<b><u>11.1</u></b>	634	11.1	635	11.1	<b><u>628</u></b>	<b><u>11.2</u></b>	629	11.2	627	11.2
483.xalancbmk	334	20.6	337	20.5	<b><u>337</u></b>	<b><u>20.5</u></b>	318	21.7	<b><u>318</u></b>	<b><u>21.7</u></b>	317	21.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 1067 MHz.

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
For information about Fujitsu please visit: <http://www.fujitsu.com>  
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 20.2**

PRIMERGY TX100 S2, Intel Celeron G1101, 2.27 GHz

**SPECint\_base2006 = 18.6**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Jul-2010  
**Hardware Availability:** Aug-2010  
**Software Availability:** May-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
429.mcf: icc -m32

C++ benchmarks (except as noted below):  
icpc -m32  
473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 20.2**

PRIMERGY TX100 S2, Intel Celeron G1101, 2.27 GHz

**SPECint\_base2006 = 18.6**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2010

**Hardware Availability:** Aug-2010

**Software Availability:** May-2010

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
               -no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
           -no-prec-div -static -auto-ilp32 -opt-prefetch
           -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
         -opt-malloc-options=3

429.mcf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo
           -no-prec-div -ansi-alias

456.hmmr: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
          -ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
           -no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
            -no-prec-div -static -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
             -no-prec-div -ansi-alias -opt-ra-region-strategy=block
             -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint2006 = 20.2**

PRIMERGY TX100 S2, Intel Celeron G1101, 2.27 GHz

**SPECint\_base2006 = 18.6**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2010

**Hardware Availability:** Aug-2010

**Software Availability:** May-2010

## Peak Optimization Flags (Continued)

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch  
-Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 10:38:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 August 2010.