



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

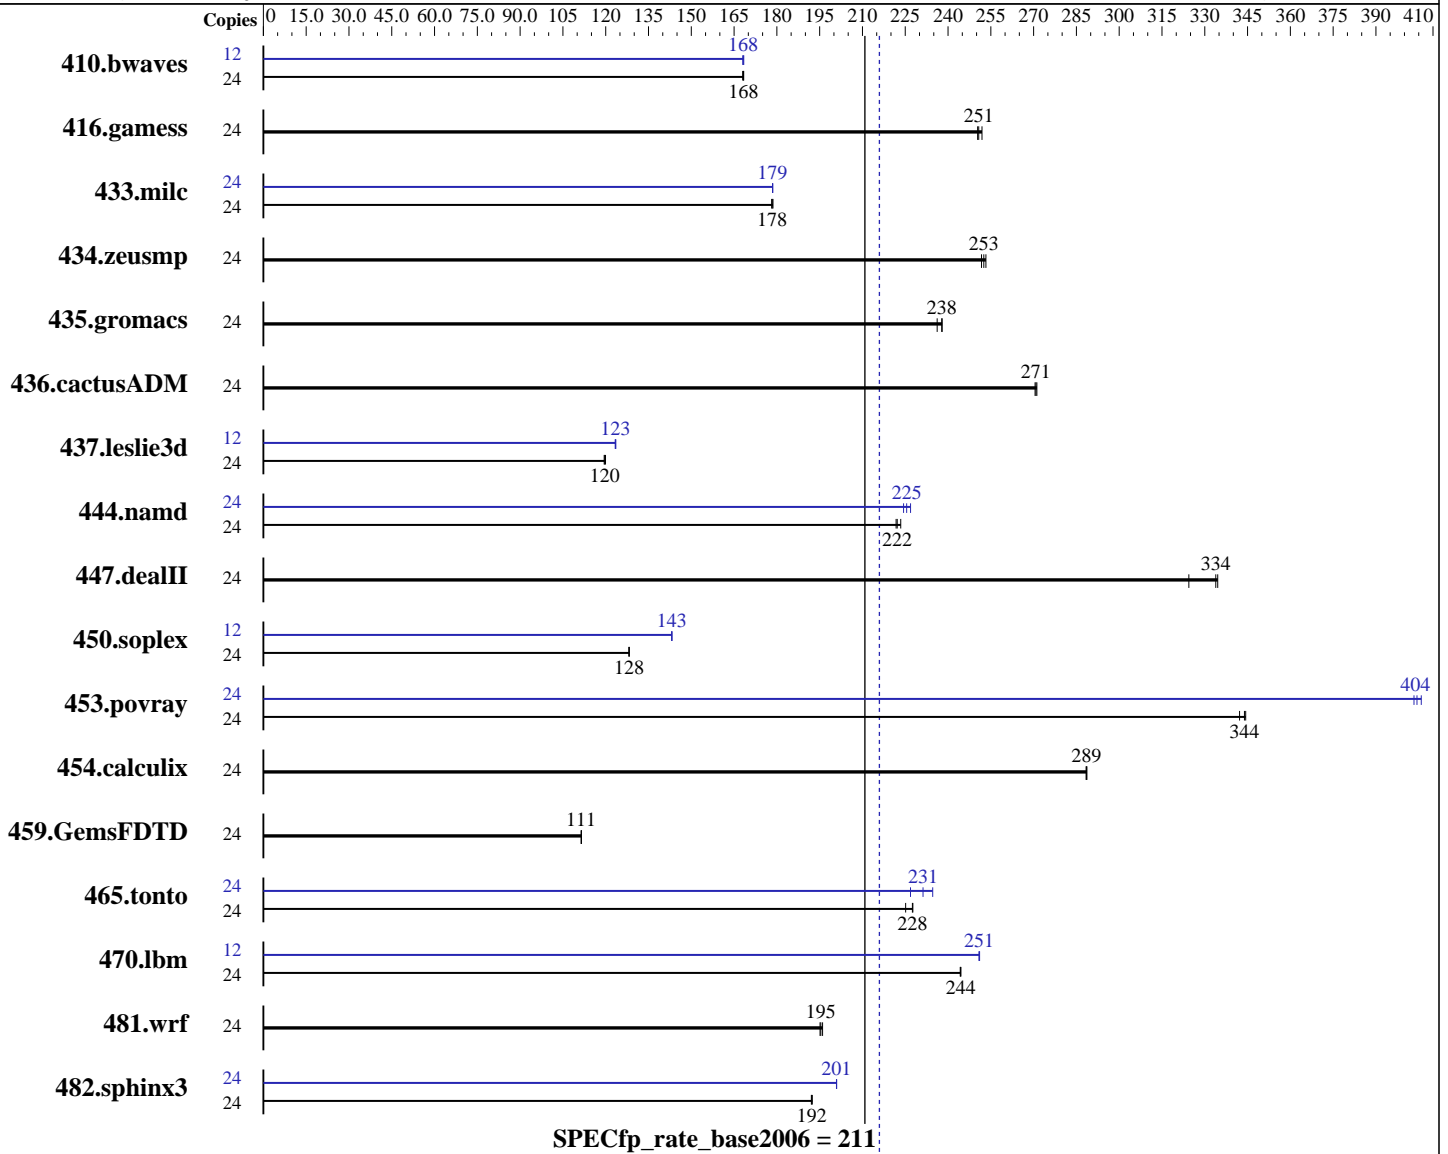

Hardware

CPU Name: Intel Xeon E5645
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19

Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
Other Hardware: --

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	<u>1938</u>	<u>168</u>	1937	168	1941	168	12	<u>969</u>	<u>168</u>	970	168	968	168		
416.gamess	24	1865	252	<u>1874</u>	<u>251</u>	1877	250	24	1865	252	<u>1874</u>	<u>251</u>	1877	250		
433.milc	24	1233	179	<u>1235</u>	<u>178</u>	1237	178	24	1234	179	<u>1234</u>	<u>179</u>	1234	178		
434.zeusmp	24	868	252	862	253	<u>865</u>	<u>253</u>	24	868	252	862	253	<u>865</u>	<u>253</u>		
435.gromacs	24	720	238	<u>721</u>	<u>238</u>	726	236	24	720	238	<u>721</u>	<u>238</u>	726	236		
436.cactusADM	24	1060	271	<u>1059</u>	<u>271</u>	1058	271	24	1060	271	<u>1059</u>	<u>271</u>	1058	271		
437.leslie3d	24	<u>1886</u>	<u>120</u>	1881	120	1888	119	12	915	123	<u>914</u>	<u>123</u>	913	124		
444.namd	24	868	222	<u>866</u>	<u>222</u>	862	223	24	<u>854</u>	<u>225</u>	858	224	848	227		
447.dealII	24	821	335	<u>822</u>	<u>334</u>	846	324	24	821	335	<u>822</u>	<u>334</u>	846	324		
450.soplex	24	1562	128	<u>1561</u>	<u>128</u>	1561	128	12	<u>699</u>	<u>143</u>	699	143	699	143		
453.povray	24	<u>371</u>	<u>344</u>	373	342	371	344	24	315	406	317	403	<u>316</u>	<u>404</u>		
454.calculix	24	687	288	<u>686</u>	<u>289</u>	686	289	24	687	288	<u>686</u>	<u>289</u>	686	289		
459.GemsFDTD	24	<u>2285</u>	<u>111</u>	2284	111	2285	111	24	<u>2285</u>	<u>111</u>	2284	111	2285	111		
465.tonto	24	1037	228	1049	225	<u>1038</u>	<u>228</u>	24	1041	227	1007	235	<u>1021</u>	<u>231</u>		
470.lbm	24	1349	244	1350	244	<u>1349</u>	<u>244</u>	12	<u>657</u>	<u>251</u>	657	251	657	251		
481.wrf	24	1374	195	<u>1372</u>	<u>195</u>	1368	196	24	1374	195	<u>1372</u>	<u>195</u>	1368	196		
482.sphinx3	24	2431	192	2435	192	<u>2433</u>	<u>192</u>	24	<u>2328</u>	<u>201</u>	2328	201	2328	201		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Hugepages were not configured on the system

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2011
Hardware Availability: Feb-2011
Software Availability: Jan-2011

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on RHEL5.5 with binutils-2.17.50.0.6-14.el5

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19

Test date: Feb-2011

Test sponsor: Fujitsu

Hardware Availability: Feb-2011

Tested by: Fujitsu

Software Availability: Jan-2011

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 216

PRIMERGY CX122 S1, Intel Xeon E5645, 2.40 GHz

SPECfp_rate_base2006 = 211

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.20110316.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:47:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 16 March 2011.