



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

## SPECint®\_rate2006 = 242

## Huawei XH620, Intel Xeon E5630

## SPECint\_rate\_base2006 = 229

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

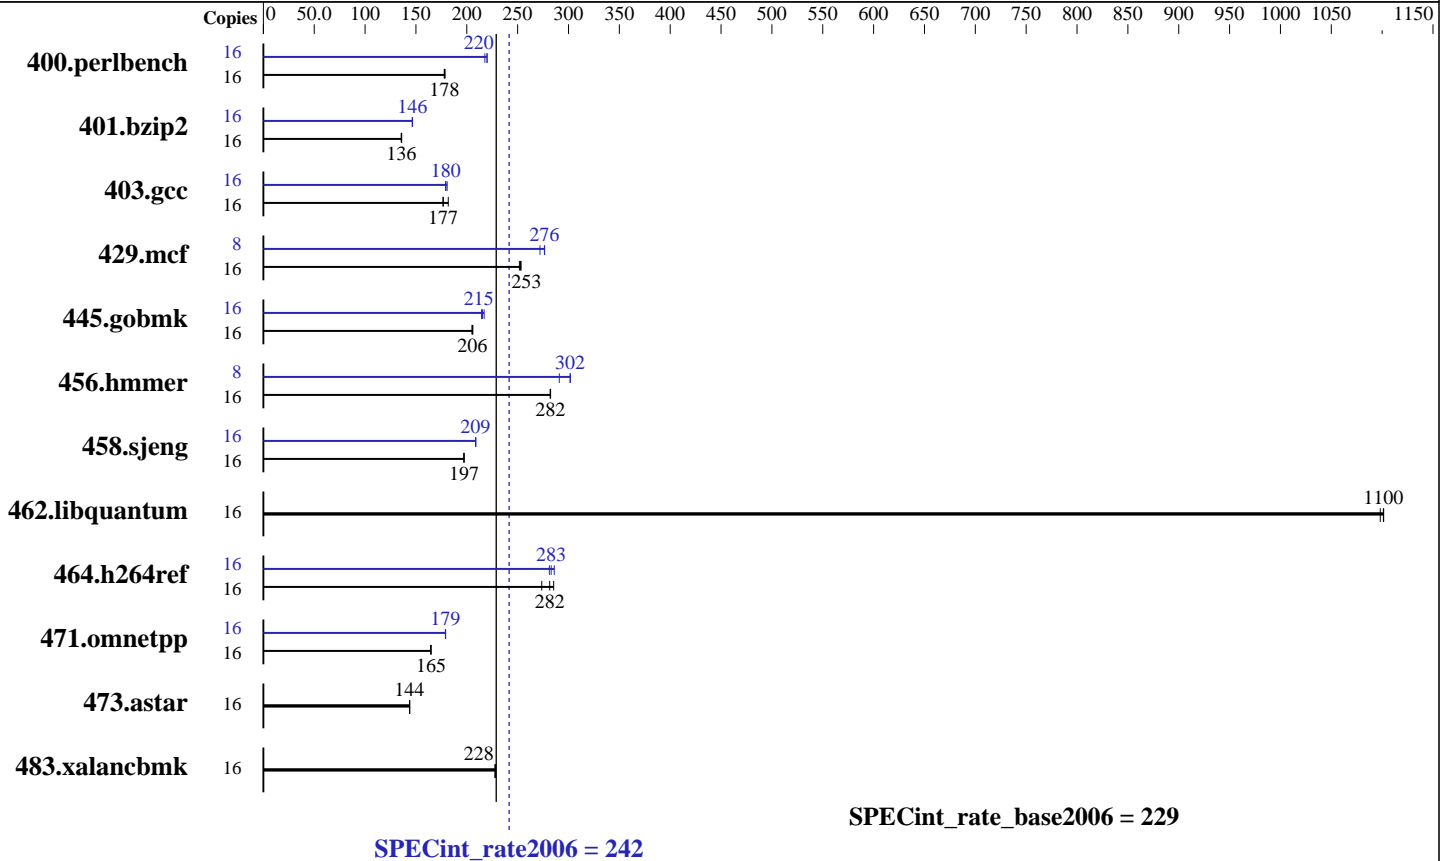

### Hardware

CPU Name: Intel Xeon E5630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 15K RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 242

Huawei XH620, Intel Xeon E5630

SPECint\_rate\_base2006 = 229

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Mar-2011  
Hardware Availability: Apr-2011  
Software Availability: Jan-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>878</b>	<b>178</b>	879	178	875	179	16	711	220	718	218	<b>711</b>	<b>220</b>
401.bzip2	16	1139	136	1135	136	<b>1137</b>	<b>136</b>	16	<b>1054</b>	<b>146</b>	1055	146	1053	147
403.gcc	16	709	182	729	177	<b>728</b>	<b>177</b>	16	713	181	<b>717</b>	<b>180</b>	719	179
429.mcf	16	580	252	<b>577</b>	<b>253</b>	576	253	8	268	272	<b>264</b>	<b>276</b>	264	277
445.gobmk	16	818	205	815	206	<b>816</b>	<b>206</b>	16	773	217	783	214	<b>779</b>	<b>215</b>
456.hammer	16	529	282	529	282	<b>529</b>	<b>282</b>	8	<b>248</b>	<b>302</b>	247	302	257	291
458.sjeng	16	982	197	981	197	<b>981</b>	<b>197</b>	16	<b>928</b>	<b>209</b>	926	209	928	209
462.libquantum	16	301	1100	302	1100	<b>301</b>	<b>1100</b>	16	301	1100	302	1100	<b>301</b>	<b>1100</b>
464.h264ref	16	1240	285	<b>1258</b>	<b>282</b>	1294	274	16	1238	286	1259	281	<b>1251</b>	<b>283</b>
471.omnetpp	16	<b>607</b>	<b>165</b>	607	165	608	164	16	<b>559</b>	<b>179</b>	558	179	559	179
473.astar	16	780	144	782	144	<b>781</b>	<b>144</b>	16	780	144	782	144	<b>781</b>	<b>144</b>
483.xalancbmk	16	<b>484</b>	<b>228</b>	484	228	485	228	16	<b>484</b>	<b>228</b>	484	228	485	228

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Hugepages were not configured on the system.

## Platform Notes

Data Reuse disabled in BIOS.

## General Notes

Binaries compiled on RHEL 5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 242

Huawei XH620, Intel Xeon E5630

SPECint\_rate\_base2006 = 229

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 242

Huawei XH620, Intel Xeon E5630

SPECint\_rate\_base2006 = 229

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 242

Huawei XH620, Intel Xeon E5630

SPECint\_rate\_base2006 = 229

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HUAWEI-platform-linux64-revA.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:15:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 April 2011.