



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

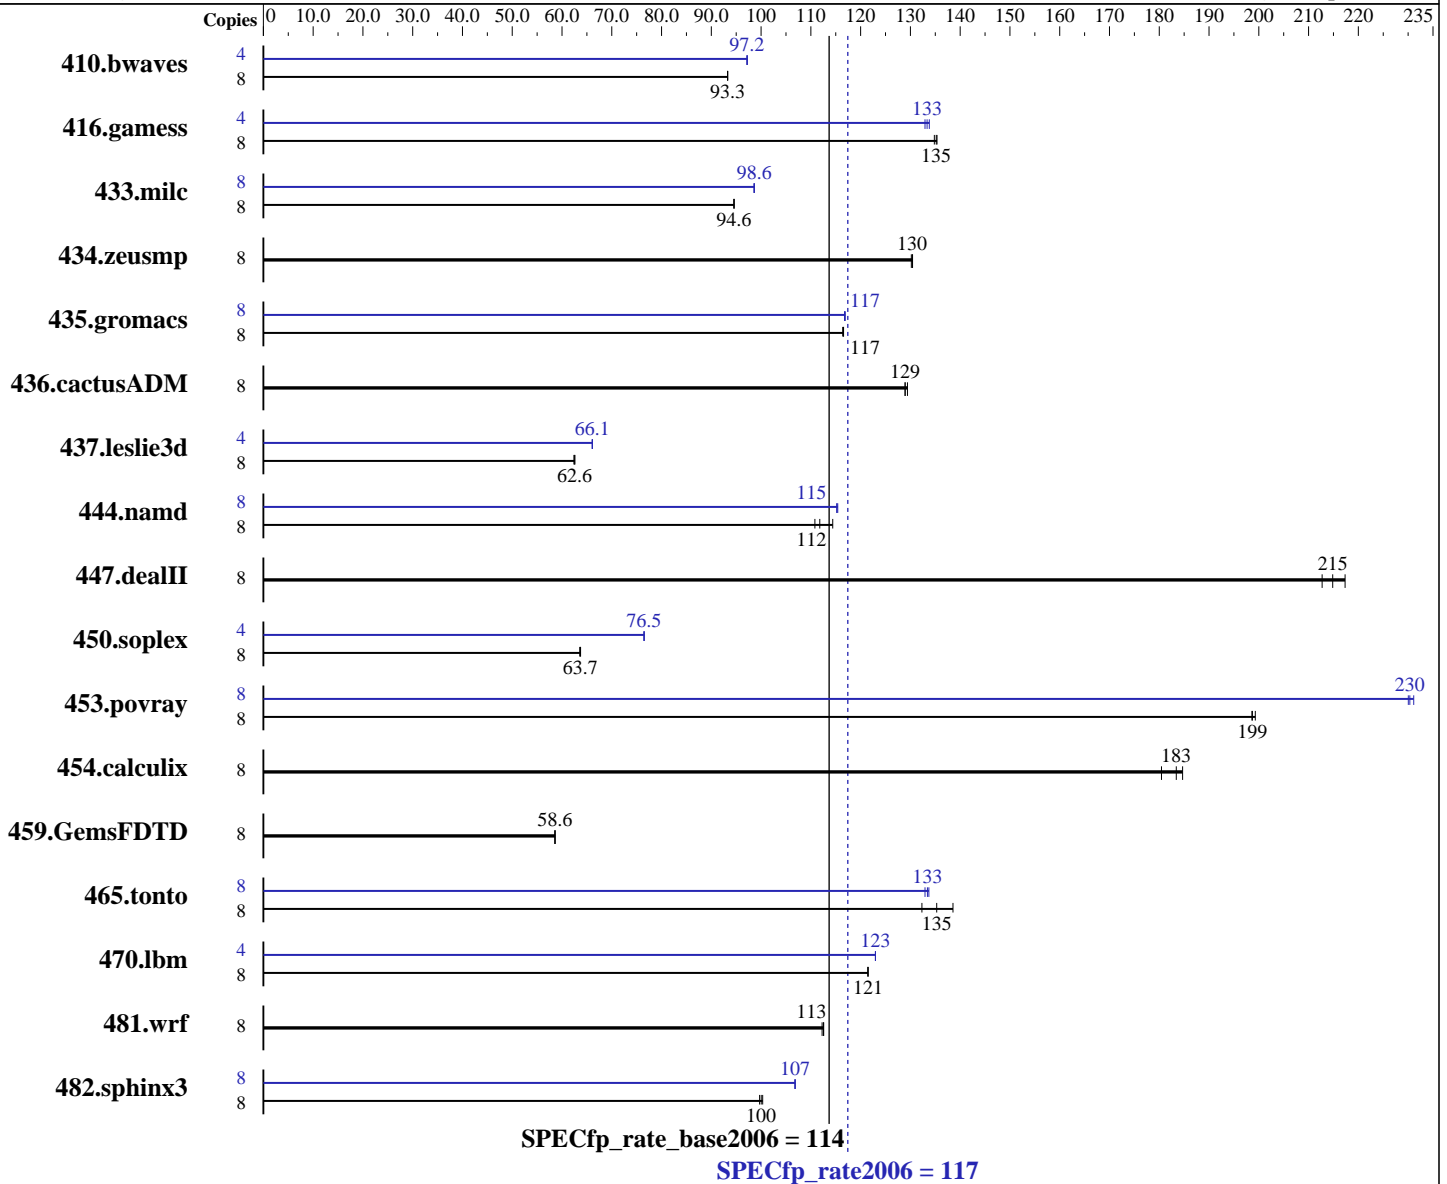

Hardware

CPU Name: Intel Xeon E3-1240
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1165	93.3	<u>1166</u>	<u>93.3</u>	1166	93.3	4	560	97.2	559	97.2	<u>559</u>	<u>97.2</u>
416.gamess	8	<u>1159</u>	<u>135</u>	1157	135	1162	135	4	<u>587</u>	<u>133</u>	589	133	585	134
433.milc	8	776	94.6	<u>777</u>	<u>94.6</u>	777	94.5	8	<u>745</u>	<u>98.6</u>	745	98.6	744	98.7
434.zeusmp	8	559	130	558	130	<u>558</u>	<u>130</u>	8	559	130	558	130	<u>558</u>	<u>130</u>
435.gromacs	8	490	117	<u>490</u>	<u>117</u>	491	116	8	489	117	<u>489</u>	<u>117</u>	489	117
436.cactusADM	8	741	129	739	129	<u>741</u>	<u>129</u>	8	741	129	739	129	<u>741</u>	<u>129</u>
437.leslie3d	8	1205	62.4	<u>1202</u>	<u>62.6</u>	1202	62.6	4	569	66.1	<u>569</u>	<u>66.1</u>	569	66.1
444.namd	8	561	114	<u>574</u>	<u>112</u>	579	111	8	<u>557</u>	<u>115</u>	557	115	556	115
447.dealII	8	421	217	<u>426</u>	<u>215</u>	430	213	8	421	217	<u>426</u>	<u>215</u>	430	213
450.soplex	8	1047	63.7	1050	63.6	<u>1048</u>	<u>63.7</u>	4	436	76.5	436	76.5	<u>436</u>	<u>76.5</u>
453.povray	8	<u>214</u>	<u>199</u>	214	199	214	199	8	<u>185</u>	<u>230</u>	184	231	185	230
454.calculix	8	357	185	366	180	<u>360</u>	<u>183</u>	8	357	185	366	180	<u>360</u>	<u>183</u>
459.GemsFDTD	8	1448	58.6	1449	58.6	<u>1449</u>	<u>58.6</u>	8	1448	58.6	1449	58.6	<u>1449</u>	<u>58.6</u>
465.tonto	8	595	132	<u>582</u>	<u>135</u>	568	139	8	592	133	<u>590</u>	<u>133</u>	589	134
470.lbm	8	905	121	<u>905</u>	<u>121</u>	905	121	4	447	123	<u>447</u>	<u>123</u>	447	123
481.wrf	8	<u>794</u>	<u>113</u>	794	113	796	112	8	<u>794</u>	<u>113</u>	794	113	796	112
482.sphinx3	8	1554	100	1564	99.7	<u>1559</u>	<u>100</u>	8	1459	107	1460	107	<u>1459</u>	<u>107</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 3600> /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge T110 II and the Bull NovaScale T810B F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge T110 II model. Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

Peak Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static
434.zeusmp: basepeak = yes
437.leslie3d: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 117

NovaScale T810B F2 (Intel Xeon E3-1240, 3.30 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32
```

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 17:55:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 June 2011.