



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

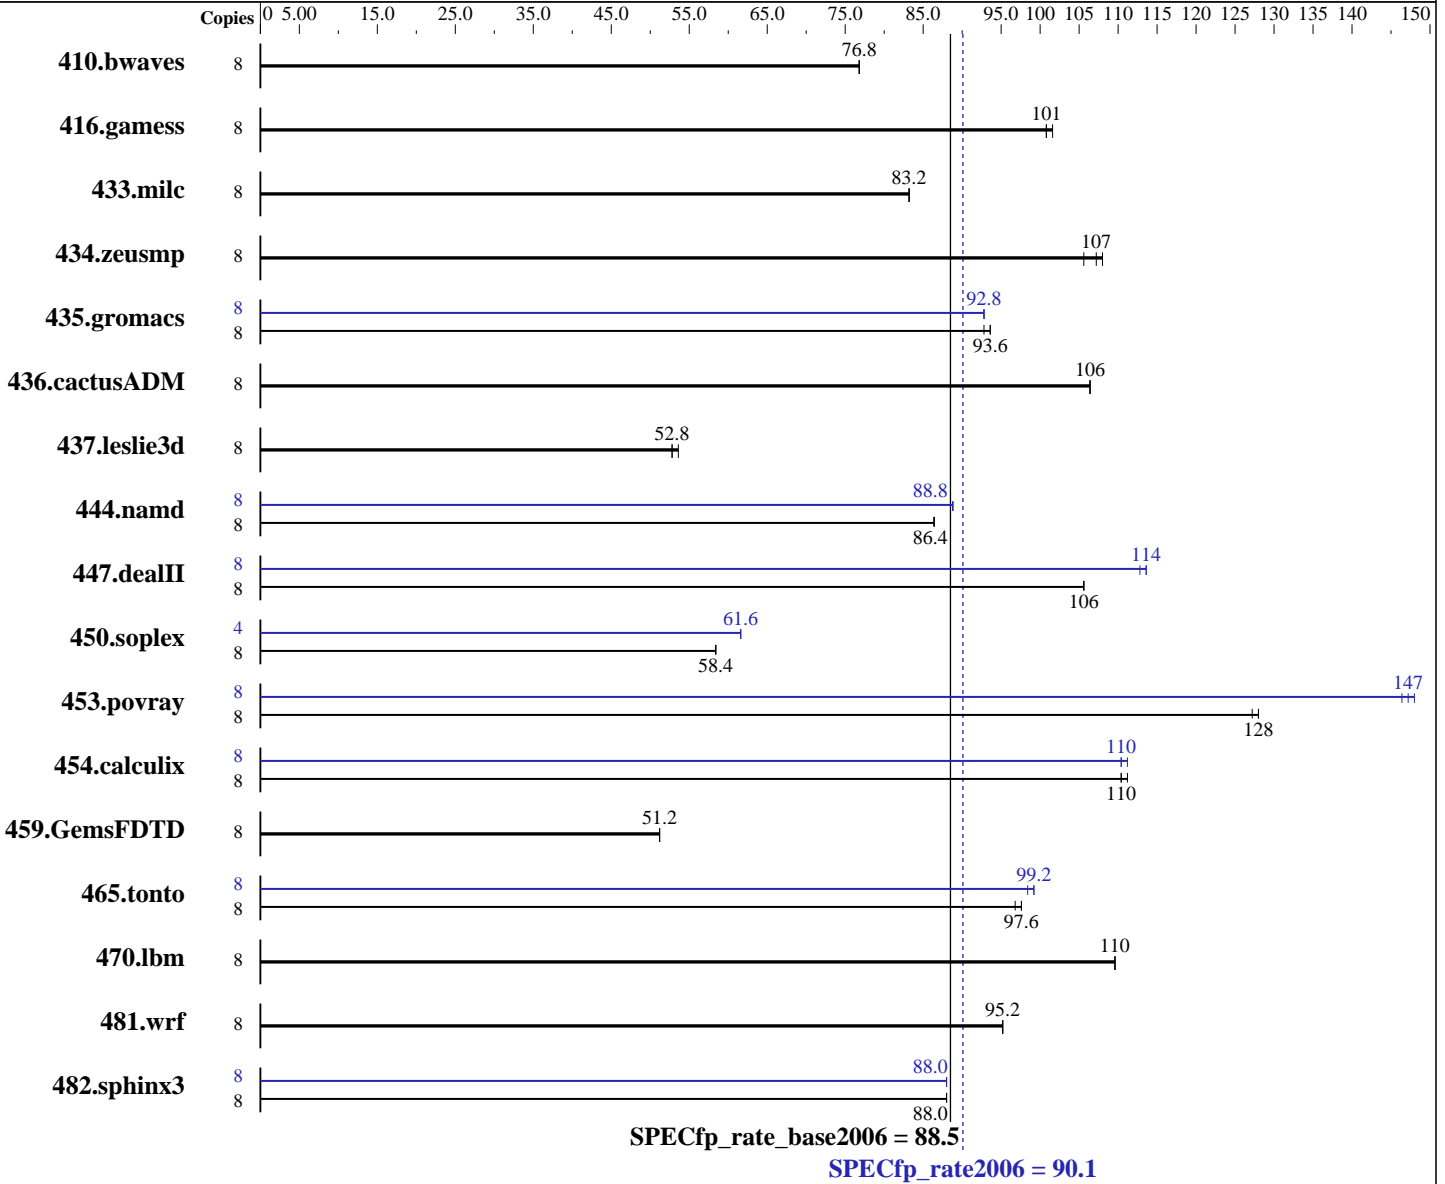

Hardware

CPU Name: Intel Core i7-860
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309
 Intel Visual Fortran Compiler XE for Intel 64 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)

Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-9)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1418	76.8	1411	76.8	1414	76.8	8	1418	76.8	1411	76.8	1414	76.8
416.gamess	8	1557	101	1552	101	1541	102	8	1557	101	1552	101	1541	102
433.milc	8	885	83.2	885	83.2	885	83.2	8	885	83.2	885	83.2	885	83.2
434.zeusmp	8	677	107	676	108	689	106	8	677	107	676	108	689	106
435.gromacs	8	611	93.6	614	92.8	609	93.6	8	616	92.8	615	92.8	615	92.8
436.cactusADM	8	897	106	898	106	896	106	8	897	106	898	106	896	106
437.leslie3d	8	1417	52.8	1421	52.8	1413	53.6	8	1417	52.8	1421	52.8	1413	53.6
444.namd	8	741	86.4	741	86.4	740	86.4	8	720	88.8	720	88.8	720	88.8
447.dealII	8	868	106	865	106	867	106	8	809	113	804	114	807	114
450.soplex	8	1149	58.4	1144	58.4	1150	58.4	4	541	61.6	542	61.6	542	61.6
453.povray	8	334	128	333	128	334	127	8	288	148	290	147	291	146
454.calculix	8	599	110	594	111	598	110	8	595	111	599	110	598	110
459.GemsFDTD	8	1658	51.2	1659	51.2	1660	51.2	8	1658	51.2	1659	51.2	1660	51.2
465.tonto	8	805	97.6	808	97.6	814	96.8	8	797	98.4	795	99.2	794	99.2
470.lbm	8	1005	110	1004	110	1005	110	8	1005	110	1004	110	1005	110
481.wrf	8	941	95.2	941	95.2	941	95.2	8	941	95.2	941	95.2	941	95.2
482.sphinx3	8	1769	88.0	1773	88.0	1769	88.0	8	1770	88.0	1771	88.0	1771	88.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 System was configured with an ATI HD5770 discrete graphics card



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
 437.lelie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlw64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlw64M.lib -link /FORCE:MULTIPLE
```

```
447.dealIII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Mar-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 -link /FORCE:MULTIPLE

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.20110808.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revB.20110808.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 90.1

Intel DP55KG Motherboard (Intel Core i7-860)

SPECfp_rate_base2006 = 88.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Mar-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 00:07:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 August 2011.