



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Unisys Corporation

**SPECint®\_rate2006 = 1080**

Unisys ES7000 Model 7600R G3 (Intel Xeon E7-8870)

**SPECint\_rate\_base2006 = 1010**

CPU2006 license: 15


Test date: Jul-2011

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2011

Tested by: Unisys Corporation

Software Availability: Apr-2011

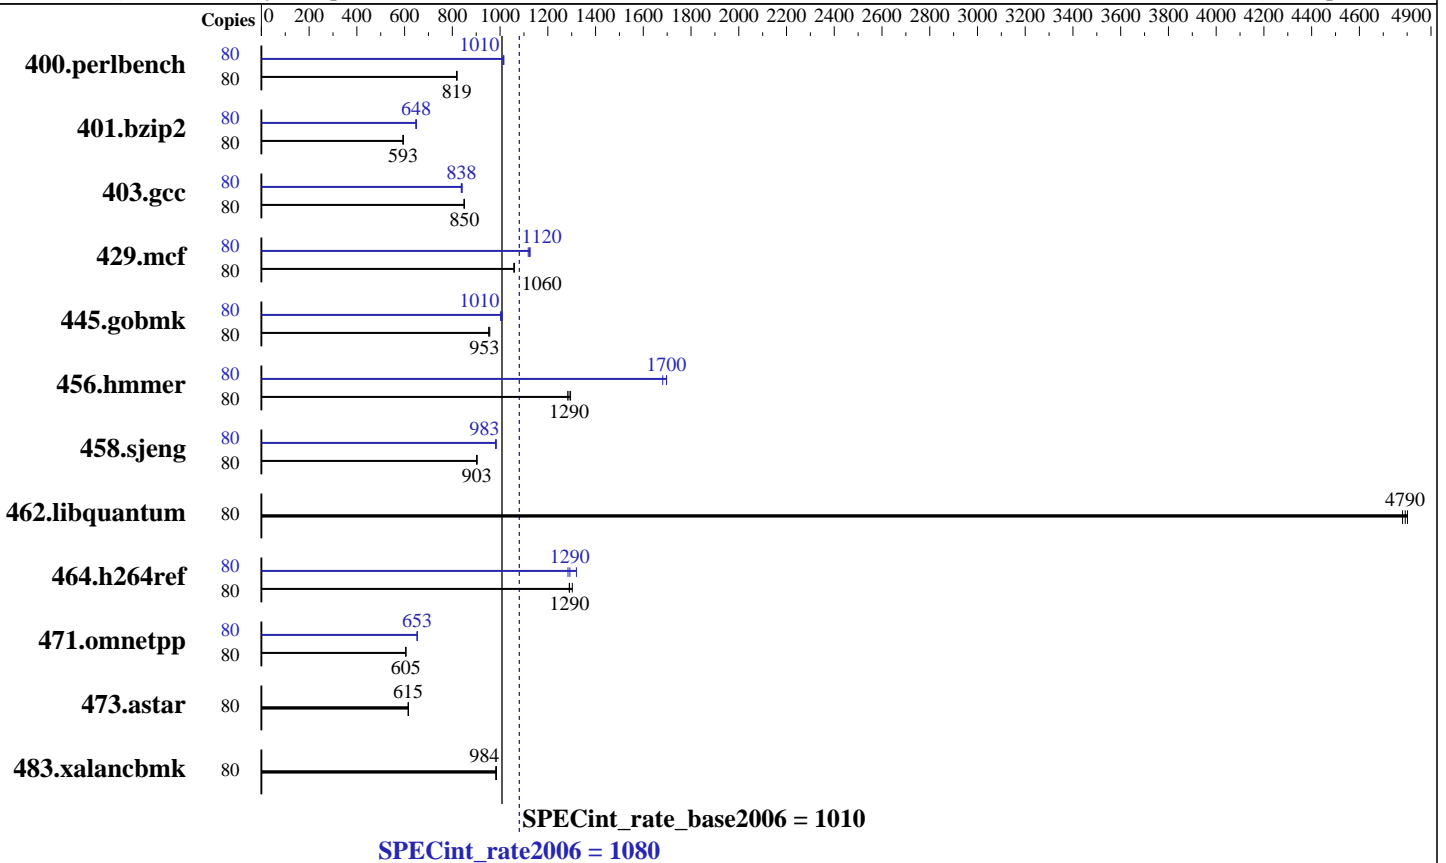

### Hardware

CPU Name: Intel Xeon E7-8870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,8 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3L-8500R-7, ECC)  
 Disk Subsystem: 3 x 146 GB SAS, 15000 RPM, RAID 0  
 Other Hardware: None

### Software

Operating System: SuSe Linux SLES10 SP1  
 Compiler: Intel C++ Compiler XE for applications running on IA-32  
 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01  
 libhugetlbfs V2.12



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Unisys Corporation

SPECint\_rate2006 = 1080

Unisys ES7000 Model 7600R G3 (Intel Xeon E7-8870)

SPECint\_rate\_base2006 = 1010

CPU2006 license: 15

Test date: Jul-2011

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2011

Tested by: Unisys Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	956	818	<u>954</u>	<u>819</u>	954	819	80	<u>771</u>	<u>1010</u>	771	1010	769	1020
401.bzip2	80	1297	595	<u>1301</u>	<u>593</u>	1301	593	80	1188	650	<u>1192</u>	<u>648</u>	1192	647
403.gcc	80	757	850	759	849	<u>757</u>	<u>850</u>	80	765	841	<u>769</u>	<u>838</u>	769	838
429.mcf	80	689	1060	<u>689</u>	<u>1060</u>	690	1060	80	653	1120	648	1130	<u>650</u>	<u>1120</u>
445.gobmk	80	877	957	<u>880</u>	<u>953</u>	881	953	80	838	1000	<u>835</u>	<u>1010</u>	832	1010
456.hammer	80	582	1280	<u>579</u>	<u>1290</u>	576	1300	80	<u>440</u>	<u>1700</u>	440	1700	444	1680
458.sjeng	80	1071	903	<u>1072</u>	<u>903</u>	1074	901	80	984	984	987	981	<u>985</u>	<u>983</u>
462.libquantum	80	<u>346</u>	<u>4790</u>	345	4800	347	4780	80	<u>346</u>	<u>4790</u>	345	4800	347	4780
464.h264ref	80	1359	1300	1373	1290	<u>1371</u>	<u>1290</u>	80	1341	1320	<u>1370</u>	<u>1290</u>	1378	1280
471.omnetpp	80	826	606	827	605	<u>827</u>	<u>605</u>	80	766	653	<u>766</u>	<u>653</u>	766	653
473.astar	80	911	616	<u>912</u>	<u>615</u>	913	615	80	911	616	<u>912</u>	<u>615</u>	913	615
483.xalancbmk	80	<u>561</u>	<u>984</u>	562	982	561	985	80	<u>561</u>	<u>984</u>	562	982	561	985

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 52000 > /proc/sys/vm/nr_hugepages'
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## General Notes

Binaries compiled on RHEL5.5 with  
binutils-2.17.50.0.6-14.el5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint\_rate2006 = 1080

Unisys ES7000 Model 7600R G3 (Intel Xeon E7-8870)

SPECint\_rate\_base2006 = 1010

CPU2006 license: 15

Test sponsor: Unisys Corporation

Tested by: Unisys Corporation

Test date: Jul-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint\_rate2006 = 1080

Unisys ES7000 Model 7600R G3 (Intel Xeon E7-8870)

SPECint\_rate\_base2006 = 1010

CPU2006 license: 15

Test sponsor: Unisys Corporation

Tested by: Unisys Corporation

Test date: Jul-2011

Hardware Availability: Jun-2011

Software Availability: Apr-2011

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

SPECint\_rate2006 = 1080

Unisys ES7000 Model 7600R G3 (Intel Xeon E7-8870)

SPECint\_rate\_base2006 = 1010

CPU2006 license: 15

Test date: Jul-2011

Test sponsor: Unisys Corporation

Hardware Availability: Jun-2011

Tested by: Unisys Corporation

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110818.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/IBM-platform-linux64-revA.20110818.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:15:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 August 2011.