



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp®2006 = **53.3**

Express5800/E110d-1 (Intel Xeon E3-1260L)

SPECfp\_base2006 = **50.0**

CPU2006 license: 9006


Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

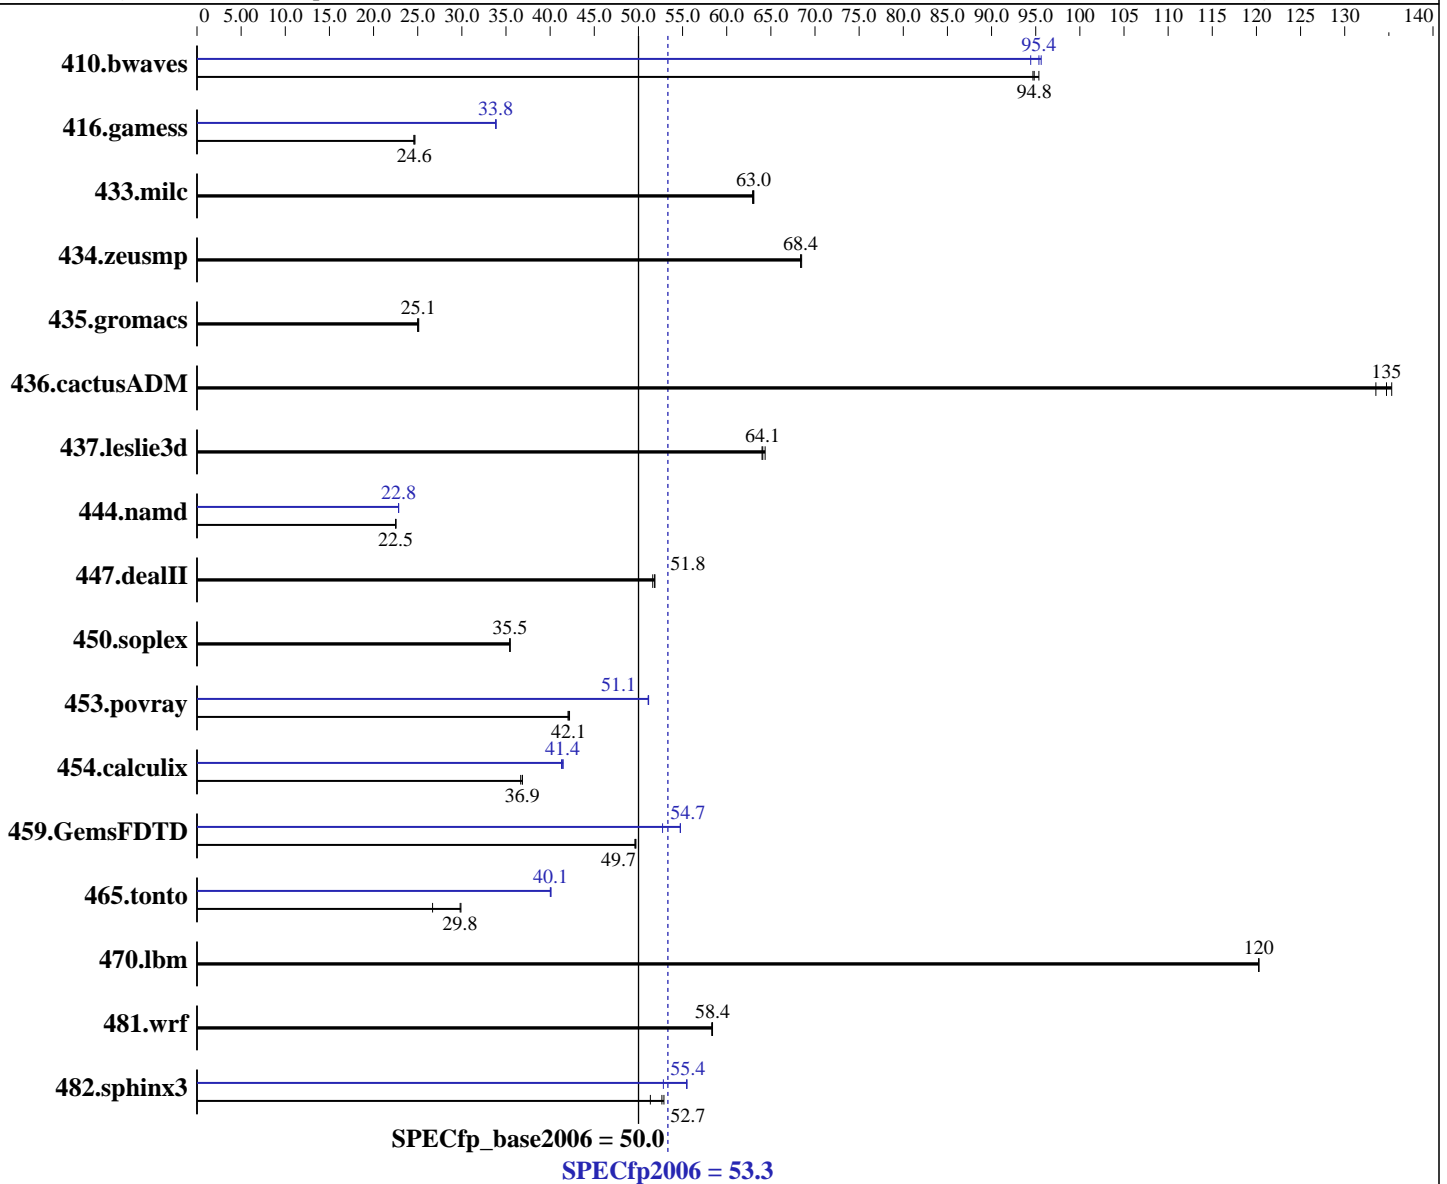

### Hardware

CPU Name: Intel Xeon E3-1260L  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.3.174 Build 20110309  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **53.3**

Express5800/E110d-1 (Intel Xeon E3-1260L)

SPECfp\_base2006 = **50.0**

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600E-9, ECC)  
Disk Subsystem: 1 x 160 GB SATA, 7200 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	144	94.7	143	95.4	<b>143</b>	<b>94.8</b>	142	95.6	144	94.4	<b>143</b>	<b>95.4</b>
416.gamess	797	24.6	793	24.7	<b>796</b>	<b>24.6</b>	<b>579</b>	<b>33.8</b>	579	33.8	578	33.9
433.milc	<b>146</b>	<b>63.0</b>	146	62.9	146	63.1	<b>146</b>	<b>63.0</b>	146	62.9	146	63.1
434.zeusmp	<b>133</b>	<b>68.4</b>	133	68.4	133	68.5	<b>133</b>	<b>68.4</b>	133	68.4	133	68.5
435.gromacs	286	25.0	284	25.1	<b>285</b>	<b>25.1</b>	286	25.0	284	25.1	<b>285</b>	<b>25.1</b>
436.cactusADM	88.3	135	<b>88.7</b>	<b>135</b>	89.5	134	88.3	135	<b>88.7</b>	<b>135</b>	89.5	134
437.leslie3d	<b>147</b>	<b>64.1</b>	147	64.0	146	64.4	<b>147</b>	<b>64.1</b>	147	64.0	146	64.4
444.namd	356	22.5	<b>356</b>	<b>22.5</b>	356	22.5	351	22.8	351	22.8	<b>351</b>	<b>22.8</b>
447.dealII	222	51.6	221	51.9	<b>221</b>	<b>51.8</b>	222	51.6	221	51.9	<b>221</b>	<b>51.8</b>
450.soplex	235	35.5	235	35.4	<b>235</b>	<b>35.5</b>	235	35.5	235	35.4	<b>235</b>	<b>35.5</b>
453.povray	126	42.2	127	42.0	<b>126</b>	<b>42.1</b>	104	51.2	<b>104</b>	<b>51.1</b>	104	51.1
454.calculix	<b>224</b>	<b>36.9</b>	225	36.7	224	36.9	200	41.3	199	41.5	<b>199</b>	<b>41.4</b>
459.GemsFDTD	214	49.6	213	49.7	<b>214</b>	<b>49.7</b>	<b>194</b>	<b>54.7</b>	201	52.7	194	54.7
465.tonto	369	26.7	329	29.9	<b>330</b>	<b>29.8</b>	<b>246</b>	<b>40.1</b>	245	40.1	246	40.0
470.lbm	114	120	<b>114</b>	<b>120</b>	114	120	114	120	<b>114</b>	<b>120</b>	114	120
481.wrf	192	58.3	<b>191</b>	<b>58.4</b>	191	58.4	192	58.3	<b>191</b>	<b>58.4</b>	191	58.4
482.sphinx3	380	51.4	<b>370</b>	<b>52.7</b>	369	52.9	369	52.8	<b>352</b>	<b>55.4</b>	351	55.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 1800 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:  
Hyper-Threading Technology: Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>NEC Corporation</b>	<b>SPECfp2006 =</b>	<b>53.3</b>
<b>Express5800/E110d-1 (Intel Xeon E3-1260L)</b>	<b>SPECfp_base2006 =</b>	<b>50.0</b>

<b>CPU2006 license:</b> 9006	<b>Test date:</b> Jul-2011
<b>Test sponsor:</b> NEC Corporation	<b>Hardware Availability:</b> Jun-2011
<b>Tested by:</b> NEC Corporation	<b>Software Availability:</b> Mar-2011

## General Notes

OMP\_NUM\_THREADS set to number of cores

## Base Compiler Invocation

### C benchmarks:

icc -m64

### C++ benchmarks:

icpc -m64

### Fortran benchmarks:

ifort -m64

### Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

### C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 53.3

Express5800/E110d-1 (Intel Xeon E3-1260L)

SPECfp\_base2006 = 50.0

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 53.3

Express5800/E110d-1 (Intel Xeon E3-1260L)

SPECfp\_base2006 = 50.0

CPU2006 license: 9006

Test date: Jul-2011

Test sponsor: NEC Corporation

Hardware Availability: Jun-2011

Tested by: NEC Corporation

Software Availability: Mar-2011

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revF.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 53.3

Express5800/E110d-1 (Intel Xeon E3-1260L)

SPECfp\_base2006 = 50.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2011

Hardware Availability: Jun-2011

Software Availability: Mar-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 23:09:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 August 2011.