



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itaotec

SPECfp®\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001


Test date: Aug-2011

Test sponsor: Itaotec

Hardware Availability: Jul-2011

Tested by: Itaotec

Software Availability: Jan-2011

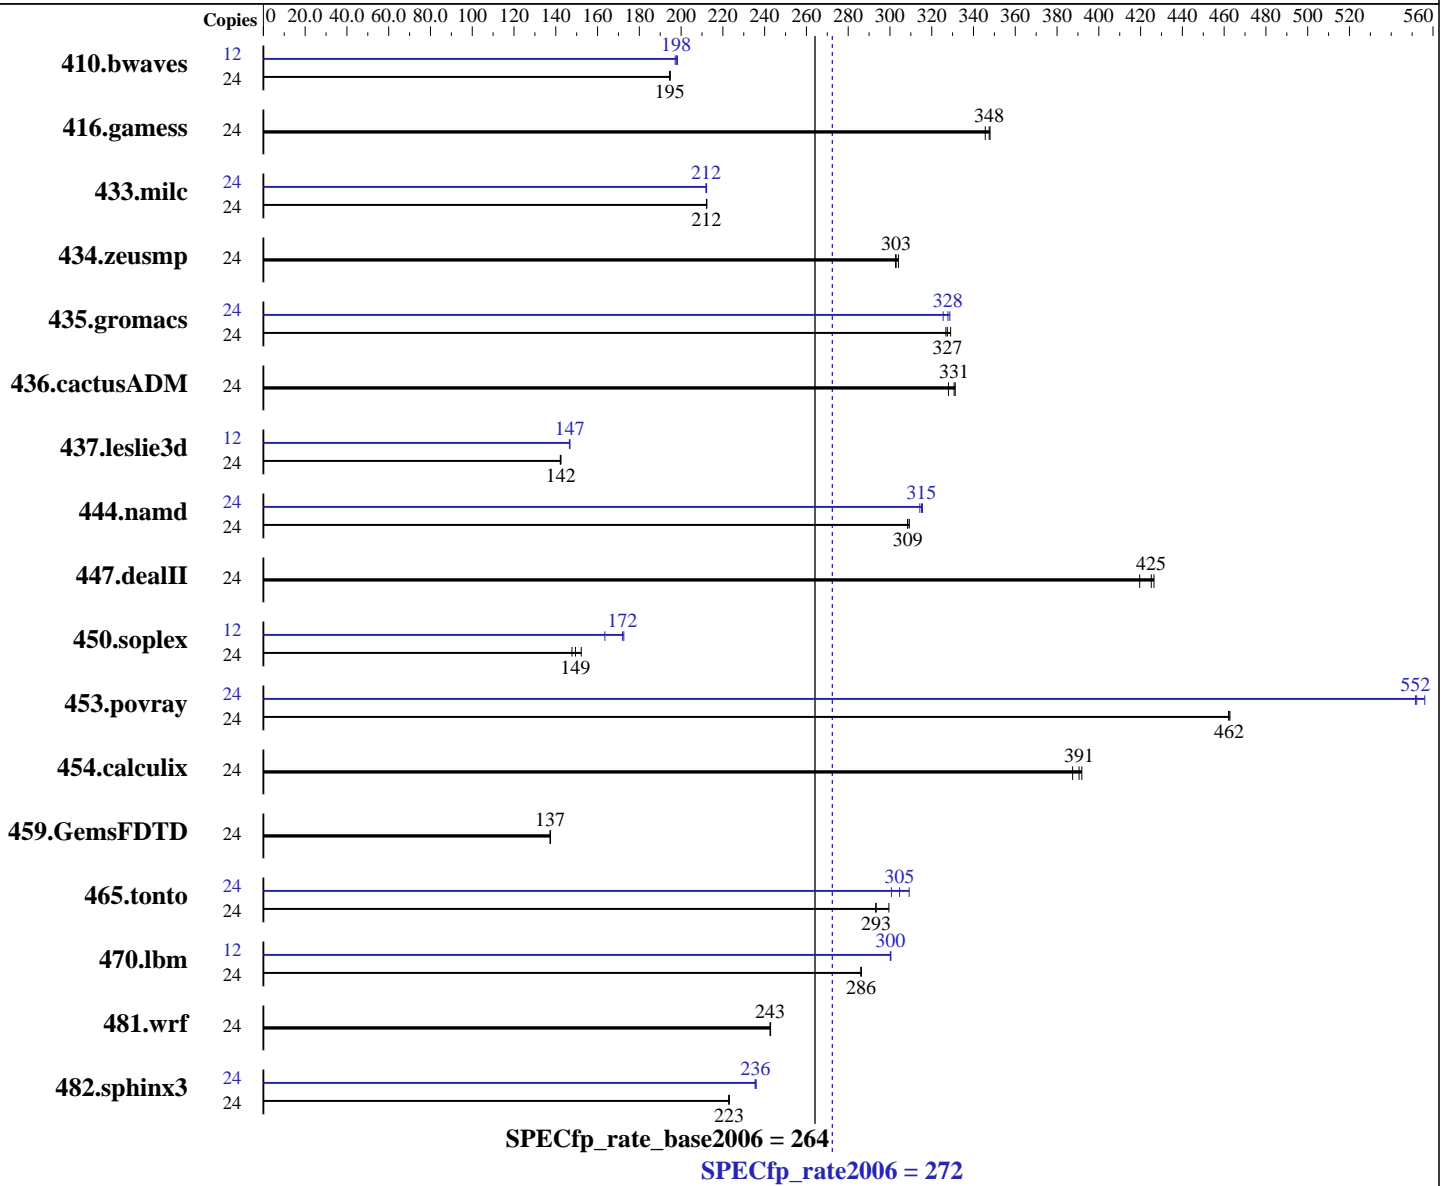

### Hardware

CPU Name: Intel Xeon X5690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz  
 CPU MHz: 3467  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.2 Build 20110112  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1674	195	1677	195	<b>1676</b>	<b>195</b>	12	822	198	<b>825</b>	<b>198</b>	827	197
416.gamess	24	<b>1352</b>	<b>348</b>	1351	348	1360	346	24	<b>1352</b>	<b>348</b>	1351	348	1360	346
433.milc	24	1038	212	<b>1038</b>	<b>212</b>	1038	212	24	1040	212	<b>1039</b>	<b>212</b>	1038	212
434.zeusmp	24	<b>721</b>	<b>303</b>	722	303	718	304	24	<b>721</b>	<b>303</b>	722	303	718	304
435.gromacs	24	<b>523</b>	<b>327</b>	524	327	521	329	24	<b>523</b>	<b>328</b>	521	329	527	325
436.cactusADM	24	874	328	866	331	<b>867</b>	<b>331</b>	24	874	328	866	331	<b>867</b>	<b>331</b>
437.leslie3d	24	1584	142	<b>1585</b>	<b>142</b>	1587	142	12	770	147	769	147	<b>769</b>	<b>147</b>
444.namd	24	622	309	624	308	<b>624</b>	<b>309</b>	24	<b>611</b>	<b>315</b>	610	316	612	314
447.dealII	24	644	426	654	420	<b>646</b>	<b>425</b>	24	644	426	654	420	<b>646</b>	<b>425</b>
450.soplex	24	1355	148	<b>1340</b>	<b>149</b>	1315	152	12	612	164	<b>582</b>	<b>172</b>	580	173
453.povray	24	276	462	<b>276</b>	<b>462</b>	276	463	24	230	556	<b>231</b>	<b>552</b>	231	552
454.calculix	24	505	392	<b>507</b>	<b>391</b>	511	387	24	505	392	<b>507</b>	<b>391</b>	511	387
459.GemsFDTD	24	<b>1854</b>	<b>137</b>	1855	137	1852	137	24	<b>1854</b>	<b>137</b>	1855	137	1852	137
465.tonto	24	<b>805</b>	<b>293</b>	789	299	806	293	24	<b>775</b>	<b>305</b>	785	301	764	309
470.lbm	24	<b>1152</b>	<b>286</b>	1153	286	1152	286	12	549	300	<b>549</b>	<b>300</b>	549	300
481.wrf	24	1104	243	<b>1105</b>	<b>243</b>	1105	243	24	1104	243	<b>1105</b>	<b>243</b>	1105	243
482.sphinx3	24	2100	223	2097	223	<b>2098</b>	<b>223</b>	24	1987	235	1982	236	<b>1985</b>	<b>236</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## General Notes

This result was measured on the Servidor Itaotec MX224.  
The Servidor Itaotec MX203+, Servidor Itaotec MX223+ and the Servidor Itaotec MX224 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## Peak Optimization Flags

### C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 272

Servidor Itaotec MX203+ (Intel Xeon X5690)

SPECfp\_rate\_base2006 = 264

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: Aug-2011  
Hardware Availability: Jul-2011  
Software Availability: Jan-2011

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.html>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itaotec-Intel-Linux64-Platform.xml>  
<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 00:30:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 August 2011.