



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

SPECfp<sup>®</sup>\_rate2006 = 755

SPECfp\_rate\_base2006 = 697

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

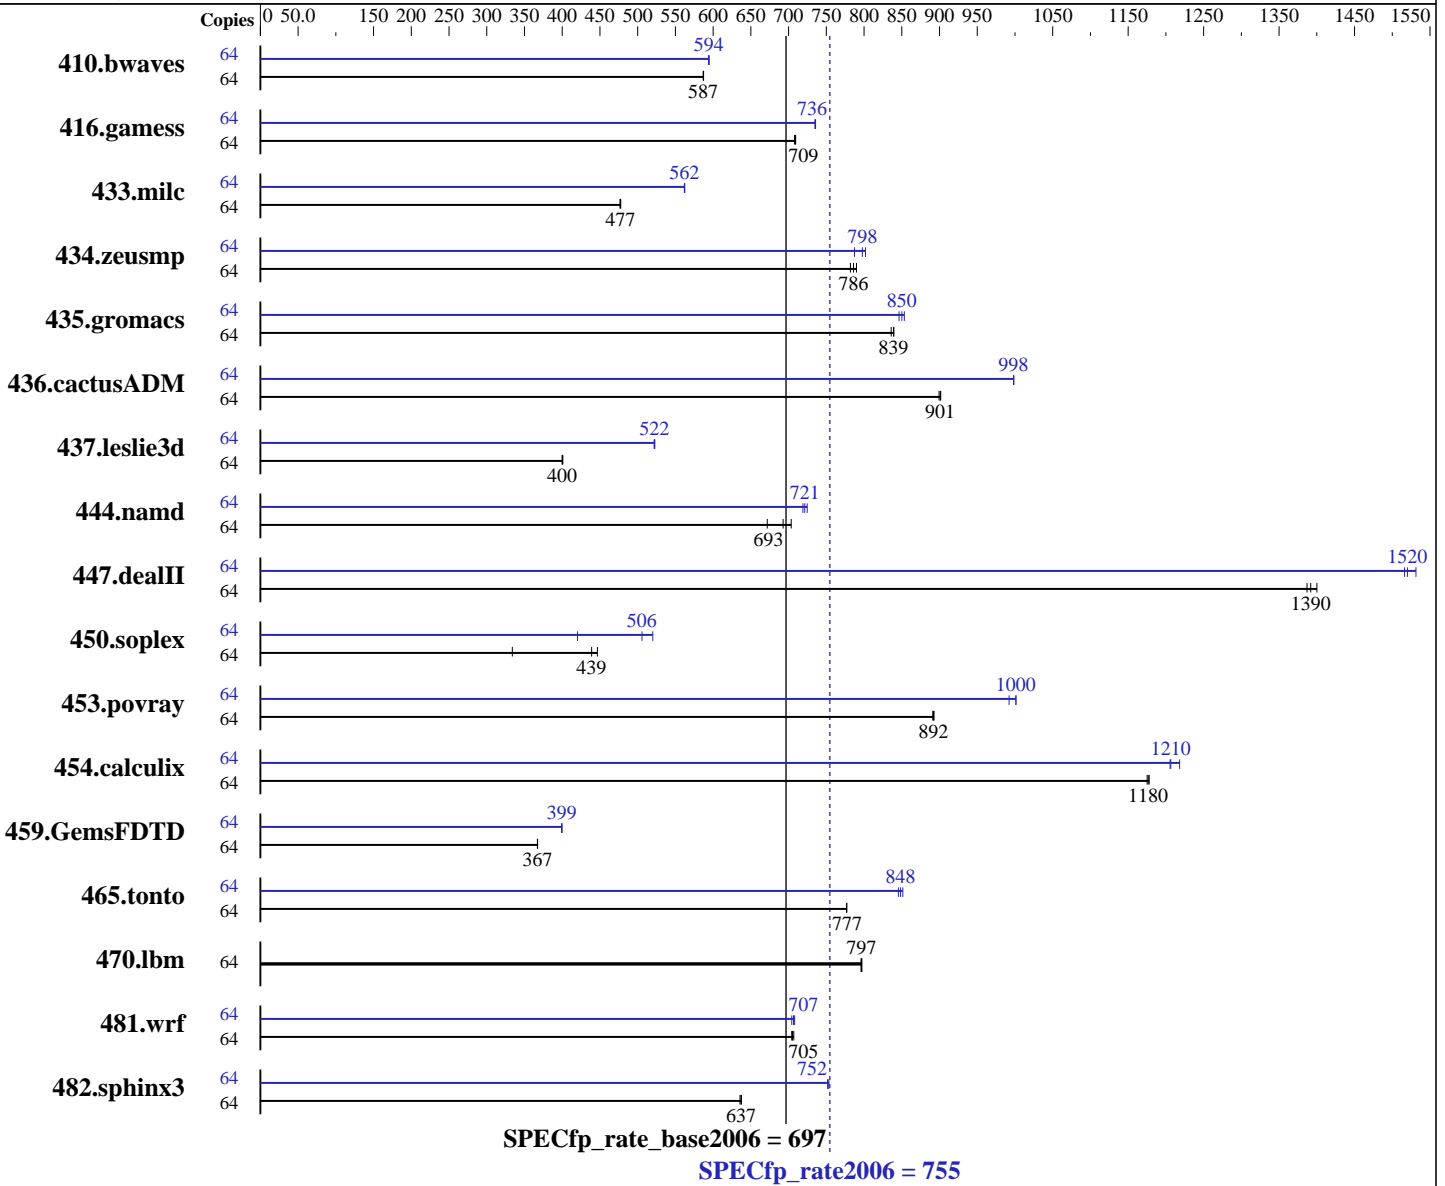

### Hardware

CPU Name: AMD Opteron 6282 SE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip  
 CPU(s) orderable: 2,4 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1, Kernel 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

SPECfp\_rate2006 = **755**

SPECfp\_rate\_base2006 = **697**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Jul-2011

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core

Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores

Other Cache: None

Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-10600R-9, ECC)

Disk Subsystem: 1 x 300 GB SAS, 10000 RPM

Other Hardware: None

Other Software: SmartHeap 10.0 32-bit Library for Linux

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1481	587	<b>1482</b>	<b>587</b>	1482	587	64	1463	595	<b>1463</b>	<b>594</b>	1464	594
416.gamess	64	1770	708	1767	709	<b>1768</b>	<b>709</b>	64	<b>1704</b>	<b>736</b>	1703	736	1705	735
433.milc	64	1230	478	<b>1231</b>	<b>477</b>	1233	477	64	1045	562	1046	562	<b>1045</b>	<b>562</b>
434.zeusmp	64	745	782	737	790	<b>741</b>	<b>786</b>	64	<b>730</b>	<b>798</b>	740	787	726	802
435.gromacs	64	547	836	<b>545</b>	<b>839</b>	544	839	64	<b>538</b>	<b>850</b>	540	846	535	853
436.cactusADM	64	848	902	<b>849</b>	<b>901</b>	850	899	64	<b>766</b>	<b>998</b>	766	999	766	998
437.leslie3d	64	1504	400	1501	401	<b>1504</b>	<b>400</b>	64	<b>1152</b>	<b>522</b>	1153	522	1151	523
444.namd	64	764	672	730	703	<b>741</b>	<b>693</b>	64	708	725	<b>711</b>	<b>721</b>	714	719
447.dealII	64	<b>526</b>	<b>1390</b>	523	1400	528	1390	64	483	1520	478	1530	<b>482</b>	<b>1520</b>
450.soplex	64	1599	334	<b>1216</b>	<b>439</b>	1195	447	64	1270	420	<b>1056</b>	<b>506</b>	1026	520
453.povray	64	<b>382</b>	<b>892</b>	382	891	381	893	64	<b>340</b>	<b>1000</b>	343	992	340	1000
454.calculix	64	<b>449</b>	<b>1180</b>	449	1180	448	1180	64	438	1210	433	1220	<b>438</b>	<b>1210</b>
459.GemsFDTD	64	1848	367	<b>1849</b>	<b>367</b>	1850	367	64	<b>1700</b>	<b>399</b>	1699	400	1701	399
465.tonto	64	811	777	810	777	<b>811</b>	<b>777</b>	64	<b>742</b>	<b>848</b>	745	846	740	851
470.lbm	64	1103	797	1105	796	<b>1104</b>	<b>797</b>	64	1103	797	1105	796	<b>1104</b>	<b>797</b>
481.wrf	64	1011	707	1015	704	<b>1014</b>	<b>705</b>	64	<b>1012</b>	<b>707</b>	1010	708	1015	704
482.sphinx3	64	1957	637	1962	636	<b>1958</b>	<b>637</b>	64	<b>1658</b>	<b>752</b>	1656	753	1659	752

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Binaries were compiled on a system with 2x AMD Opteron 6276 chips + 128GB Memory using RHEL 6.1  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

**SPECfp\_rate2006 = 755**

**SPECfp\_rate\_base2006 = 697**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Operating System Notes (Continued)

Huge pages, transparent Huge pages, and space randomization controlled with the following settings:  
echo 57344 > /proc/sys/vm/nr\_hugepages  
mount -t hugetlbfs nodev /mnt/hugepages  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
echo 0 > /proc/sys/kernel/randomize\_va\_space=0

## Platform Notes

'Power Management' set to 'Maximum Performance' in BIOS  
Core Boost Technology Disabled in BIOS

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1104-rate-libs-revA/32:/root/cpu2006-1.1/amd1104-rate-libs-revA/64"  
  
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

## Base Compiler Invocation

C benchmarks:  
opencC  
  
C++ benchmarks:  
openCC  
  
Fortran benchmarks:  
openf95  
  
Benchmarks using both Fortran and C:  
opencC openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

**SPECfp\_rate2006 = 755**

**SPECfp\_rate\_base2006 = 697**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Base Portability Flags (Continued)

450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso

C++ benchmarks:  
-march=bdver1 -Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET

Fortran benchmarks:  
-march=bdver1 -Ofast -LNO:blocking=off -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso

Benchmarks using both Fortran and C:  
-march=bdver1 -Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m  
-IPA:plimit=8000 -IPA:small\_pu=100 -mso -LNO:blocking=off  
-OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

**SPECfp\_rate2006 = 755**

**SPECfp\_rate\_base2006 = 697**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -march=bdver1 -Ofast -CG:movnti=1 -CG:locs_best=on
-HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso

470.lbm: basepeak = yes

482.sphinx3: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:local_sched_alg=2 -INLINE:aggressive=on
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso

```

### C++ benchmarks:

```

444.namd: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m

447.dealII: -march=bdver1 -Ofast -D__OPEN64_FAST_SET -static
-INLINE:aggressive=on -LNO:opt=0 -LNO:simd=0
-fno-emit-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off
-TENV:frame_pointer=off

450.soplex: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

**SPECfp\_rate2006 = 755**

**SPECfp\_rate\_base2006 = 697**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

450.soplex (continued):

-OPT:fold\_unsigned\_relops=on -fno-exceptions -m32  
-HP:bd=2m:heap=2m -WOPT:sib=on

453.povray:

-march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:pre\_local\_sched=off  
-INLINE:aggressive=on -HP:bd=2m:heap=2m -OPT:transform=2  
-OPT:alias=disjoint -WOPT:aggcm=0

Fortran benchmarks:

410.bwaves:

-march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:ignore\_feedback=off -LNO:fu=4  
-LNO:loop\_model\_simd=on -LNO:simd\_rm\_unity\_remainder=on  
-WOPT:aggstr=0 -HP:bd=2m:heap=2m -CG:cmp\_peep=on

416.gamess:

-march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:simd=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -CG:local\_sched\_alg=1  
-HP:bd=2m:heap=2m -WOPT:sib=on

434.zeusmp:

-march=bdver1 -Ofast -LNO:blocking=off -LNO:interchange=off  
-HP:bd=2m:heap=2m

437.leslie3d:

-march=bdver1 -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0  
-LNO:fusion=2 -HP:bd=2m:heap=2m -mso

459.GemsFDTD:

-march=bdver1 -Ofast -OPT:unroll\_size=0 -LNO:fission=2  
-CG:load\_exe=0 -CG:local\_sched\_alg=2 -HP

465.tonto:

-march=bdver1 -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-HP:bd=2m:heap=2m

Benchmarks using both Fortran and C:

435.gromacs:

-march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:rsqrt=2  
-HP:bd=2m:heap=2m

436.cactusADM:

-march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:blocking=off  
-LNO:prefetch=2 -HP -CG:locs\_shallow\_depth=1 -CG:load\_exe=0  
-WOPT:sib=on

454.calculix:

-march=bdver1 -Ofast -OPT:unroll\_size=256  
-GRA:optimize\_boundary=on -HP:bd=2m:heap=2m

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M915  
(AMD Opteron 6282 SE, 2.60 GHz)

**SPECfp\_rate2006 = 755**

**SPECfp\_rate\_base2006 = 697**

**CPU2006 license:** 55  
**Test sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test date:** Nov-2011  
**Hardware Availability:** Nov-2011  
**Software Availability:** Jul-2011

## Peak Optimization Flags (Continued)

```
481.wrf: -march=bdver1 -Ofast -LNO:blocking=off -LANG:copyinout=off
        -IPA:callee_limit=5000 -GRA:prioritize_by_density=on
        -CG:load_exe=1 -HP -WOPT:sib=on
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.html>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd1104-platform-rate-revA.20111122.xml>  
<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Thu Jul 24 01:35:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 November 2011.