



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp[®]_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

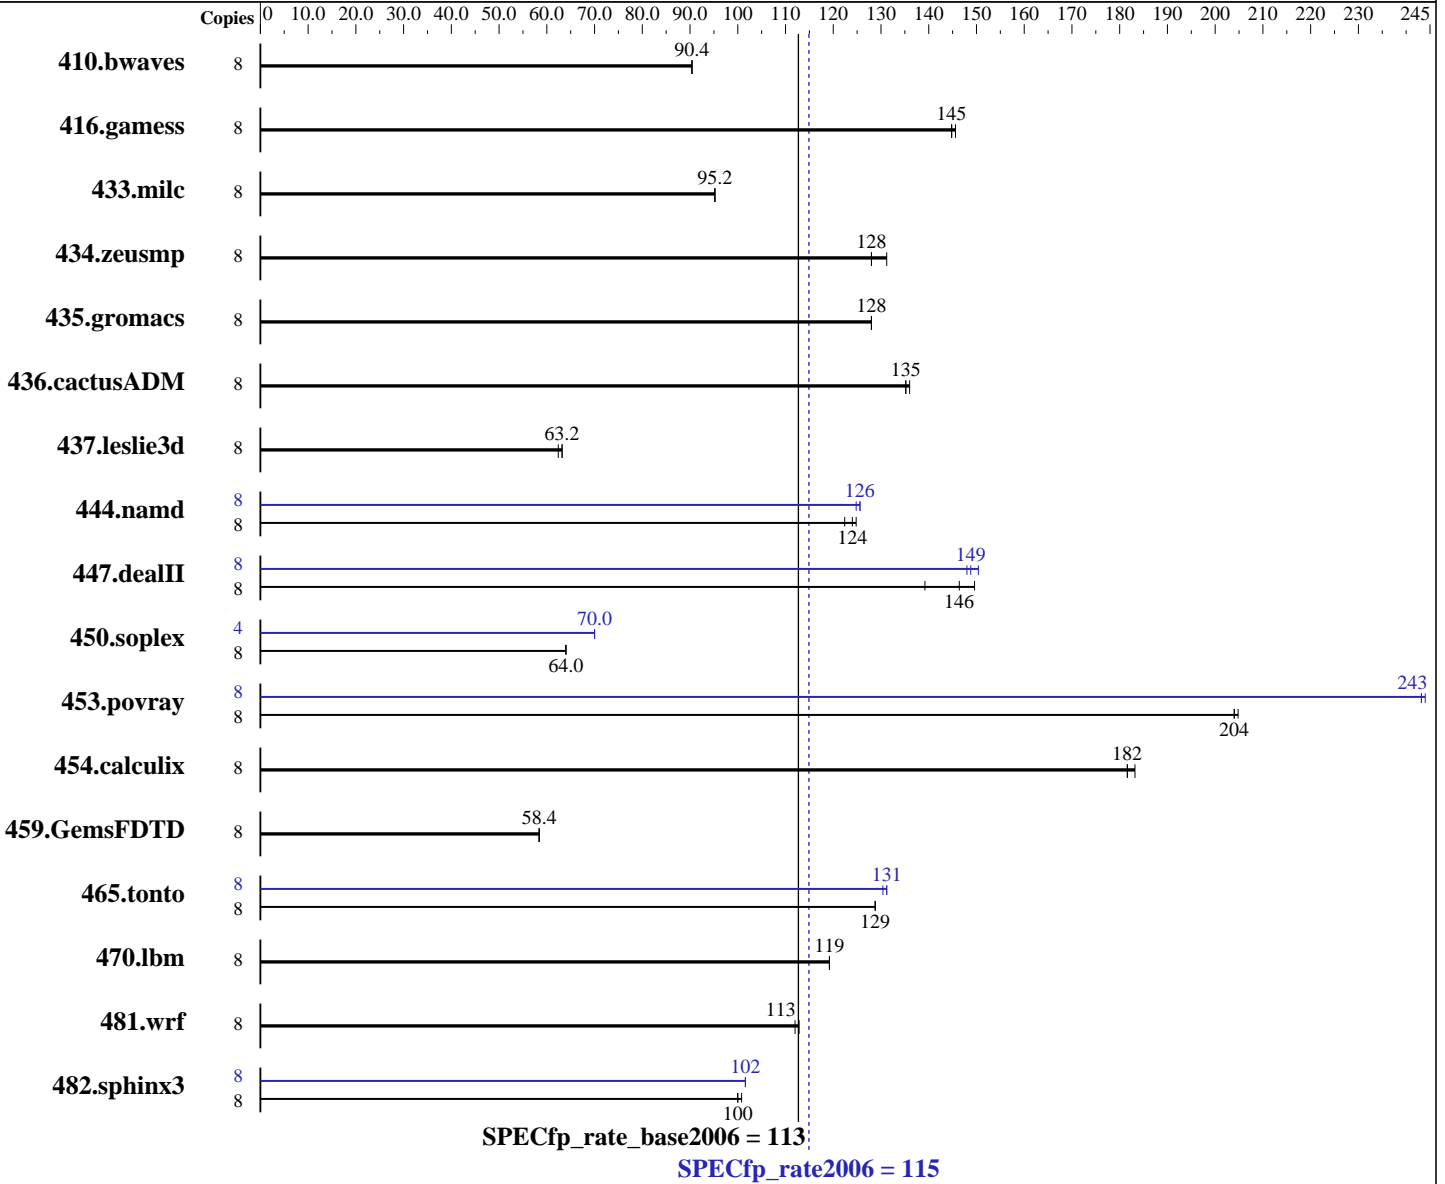

Hardware

CPU Name: Intel Core i7-2700K
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate SP1 (64-bit)
 Compiler: C/C++: Version 12.0.3.176 of Intel C++ Studio XE for Windows;
 Fortran: Version 12.0.3.176 of Intel Visual Fortran Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13

Test date: Nov-2011

Test sponsor: Intel Corporation

Hardware Availability: Nov-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (2 x 4 GB 2Rx8 PC3-10600U-11)
 Disk Subsystem: Intel 160 GB SSD
 Other Hardware: None

System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1202	90.4	1199	90.4	<u>1199</u>	<u>90.4</u>	8	1202	90.4	1199	90.4	<u>1199</u>	<u>90.4</u>
416.gamess	8	1083	145	1074	146	<u>1080</u>	<u>145</u>	8	1083	145	1074	146	<u>1080</u>	<u>145</u>
433.milc	8	773	95.2	<u>774</u>	<u>95.2</u>	774	95.2	8	773	95.2	<u>774</u>	<u>95.2</u>	774	95.2
434.zeusmp	8	<u>567</u>	<u>128</u>	556	131	568	128	8	<u>567</u>	<u>128</u>	556	131	568	128
435.gromacs	8	447	128	448	128	<u>447</u>	<u>128</u>	8	447	128	448	128	<u>447</u>	<u>128</u>
436.cactusADM	8	707	135	705	136	<u>705</u>	<u>135</u>	8	707	135	705	136	<u>705</u>	<u>135</u>
437.leslie3d	8	<u>1197</u>	<u>63.2</u>	1203	62.4	1196	63.2	8	<u>1197</u>	<u>63.2</u>	1203	62.4	1196	63.2
444.namd	8	526	122	<u>518</u>	<u>124</u>	514	125	8	515	125	510	126	<u>510</u>	<u>126</u>
447.dealII	8	656	139	613	150	<u>624</u>	<u>146</u>	8	620	148	609	150	<u>614</u>	<u>149</u>
450.soplex	8	1043	64.0	<u>1043</u>	<u>64.0</u>	1043	64.0	4	477	70.0	477	70.0	<u>477</u>	<u>70.0</u>
453.povray	8	209	204	208	205	<u>209</u>	<u>204</u>	8	175	244	<u>175</u>	<u>243</u>	175	243
454.calculix	8	363	182	360	183	<u>363</u>	<u>182</u>	8	363	182	360	183	<u>363</u>	<u>182</u>
459.GemsFDTD	8	1454	58.4	1453	58.4	<u>1453</u>	<u>58.4</u>	8	1454	58.4	1453	58.4	<u>1453</u>	<u>58.4</u>
465.tonto	8	611	129	<u>611</u>	<u>129</u>	610	129	8	<u>601</u>	<u>131</u>	600	131	602	130
470.lbm	8	<u>921</u>	<u>119</u>	921	119	921	119	8	<u>921</u>	<u>119</u>	921	119	921	119
481.wrf	8	<u>794</u>	<u>113</u>	793	113	796	112	8	<u>794</u>	<u>113</u>	793	113	796	112
482.sphinx3	8	<u>1553</u>	<u>100</u>	1553	101	1554	100	8	1535	102	1536	102	<u>1536</u>	<u>102</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

Component Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 System was configured with an ATI HD 6990 discrete graphics card



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13

Test date: Nov-2011

Test sponsor: Intel Corporation

Hardware Availability: Nov-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qcxx-features
-Qauto-ilp32 /F1000000000 shlw64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias /F1000000000
-link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13

Test date: Nov-2011

Test sponsor: Intel Corporation

Hardware Availability: Nov-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-QxAVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qauto-ilp32 /F1000000000
-link /FORCE:MULTIPLE
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc9 -Qstd=c99 ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -QxAVX -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE
```

```
447.dealIII: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Qansi-alias -Qscalar-rep-
-Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13

Test date: Nov-2011

Test sponsor: Intel Corporation

Hardware Availability: Nov-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

450.soplex: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000
-link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.20111012.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 115

Intel DH67BLB3 motherboard (Intel Core i7-2700K)

SPECfp_rate_base2006 = 113

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2011

Hardware Availability: Nov-2011

Software Availability: Apr-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:07:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 December 2011.