



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec


SPECint®\_rate2006 = 335

Servidor Itautec MX203 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 317

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

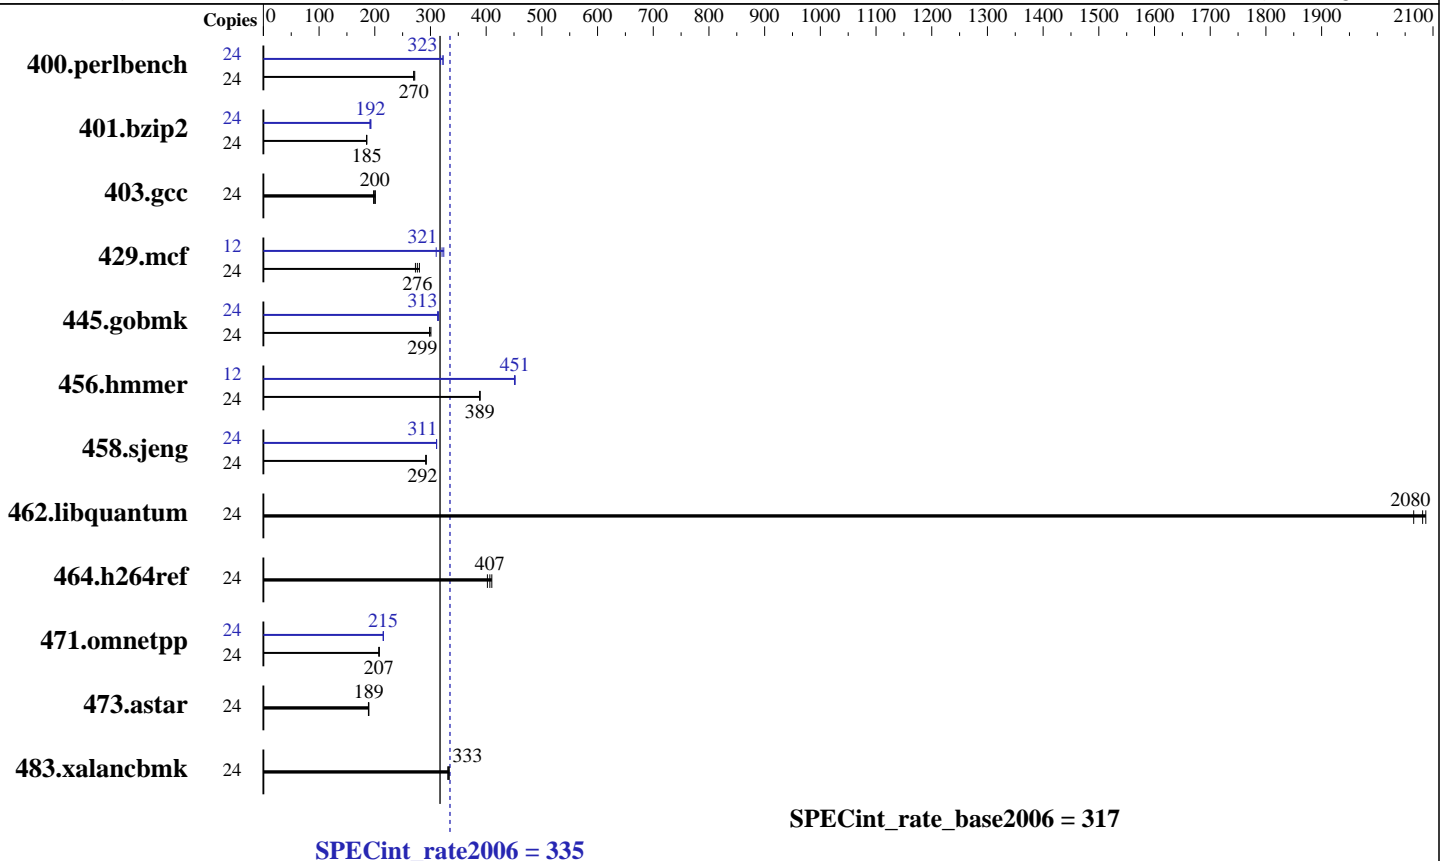

## Hardware

CPU Name: Intel Xeon E5649  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 1 x 500 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: C/C++: Version 12.1.0 of Intel Compiler XE Build 20110811  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 335

Servidor Itautec MX203 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 317

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>868</b>	<b>270</b>	868	270	863	272	24	727	323	737	318	<b>727</b>	<b>323</b>
401.bzip2	24	<b>1249</b>	<b>185</b>	1248	186	1250	185	24	1199	193	1210	191	<b>1205</b>	<b>192</b>
403.gcc	24	977	198	961	201	<b>967</b>	<b>200</b>	24	977	198	961	201	<b>967</b>	<b>200</b>
429.mcf	24	781	280	802	273	<b>792</b>	<b>276</b>	12	353	310	<b>341</b>	<b>321</b>	338	324
445.gobmk	24	837	301	843	299	<b>843</b>	<b>299</b>	24	800	315	<b>804</b>	<b>313</b>	804	313
456.hammer	24	<b>576</b>	<b>389</b>	576	389	577	388	12	<b>248</b>	<b>451</b>	248	452	248	451
458.sjeng	24	<b>994</b>	<b>292</b>	993	292	996	292	24	934	311	934	311	<b>934</b>	<b>311</b>
462.libquantum	24	241	2070	238	2090	<b>239</b>	<b>2080</b>	24	241	2070	238	2090	<b>239</b>	<b>2080</b>
464.h264ref	24	1295	410	<b>1306</b>	<b>407</b>	1321	402	24	1295	410	<b>1306</b>	<b>407</b>	1321	402
471.omnetpp	24	723	207	<b>723</b>	<b>207</b>	721	208	24	<b>697</b>	<b>215</b>	696	216	697	215
473.astar	24	893	189	<b>891</b>	<b>189</b>	891	189	24	893	189	<b>891</b>	<b>189</b>	891	189
483.xalancbmk	24	496	334	<b>498</b>	<b>333</b>	500	331	24	496	334	<b>498</b>	<b>333</b>	500	331

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
Large pages were not enabled for this run

## Platform Notes

Data Reuse disabled in BIOS.

## General Notes

This result was measured on the Servidor Itautec MX223.  
The Servidor Itautec MX203 and the Servidor Itautec MX223  
are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 335

Servidor Itautec MX203 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 317

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 335

Servidor Itautec MX203 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 317

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: Dec-2011  
Hardware Availability: Jul-2011  
Software Availability: Aug-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/rcaneca/sh/SmartHeap\_8.1/lib -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECint\_rate2006 = 335

Servidor Itautec MX203 (Intel Xeon E5649)

SPECint\_rate\_base2006 = 317

CPU2006 license: 9001

Test date: Dec-2011

Test sponsor: Itautec

Hardware Availability: Jul-2011

Tested by: Itautec

Software Availability: Aug-2011

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Itautec-Intel-Linux64-Platform.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-linux64.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 03:24:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 January 2012.