



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp®_rate2006 = 213

ACTINA SOLAR 220 S4 (Intel Xeon E5645)

SPECfp_rate_base2006 = 212

CPU2006 license: 9008


Test date: Jan-2012

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2011

Tested by: ACTION S.A.

Software Availability: Oct-2011

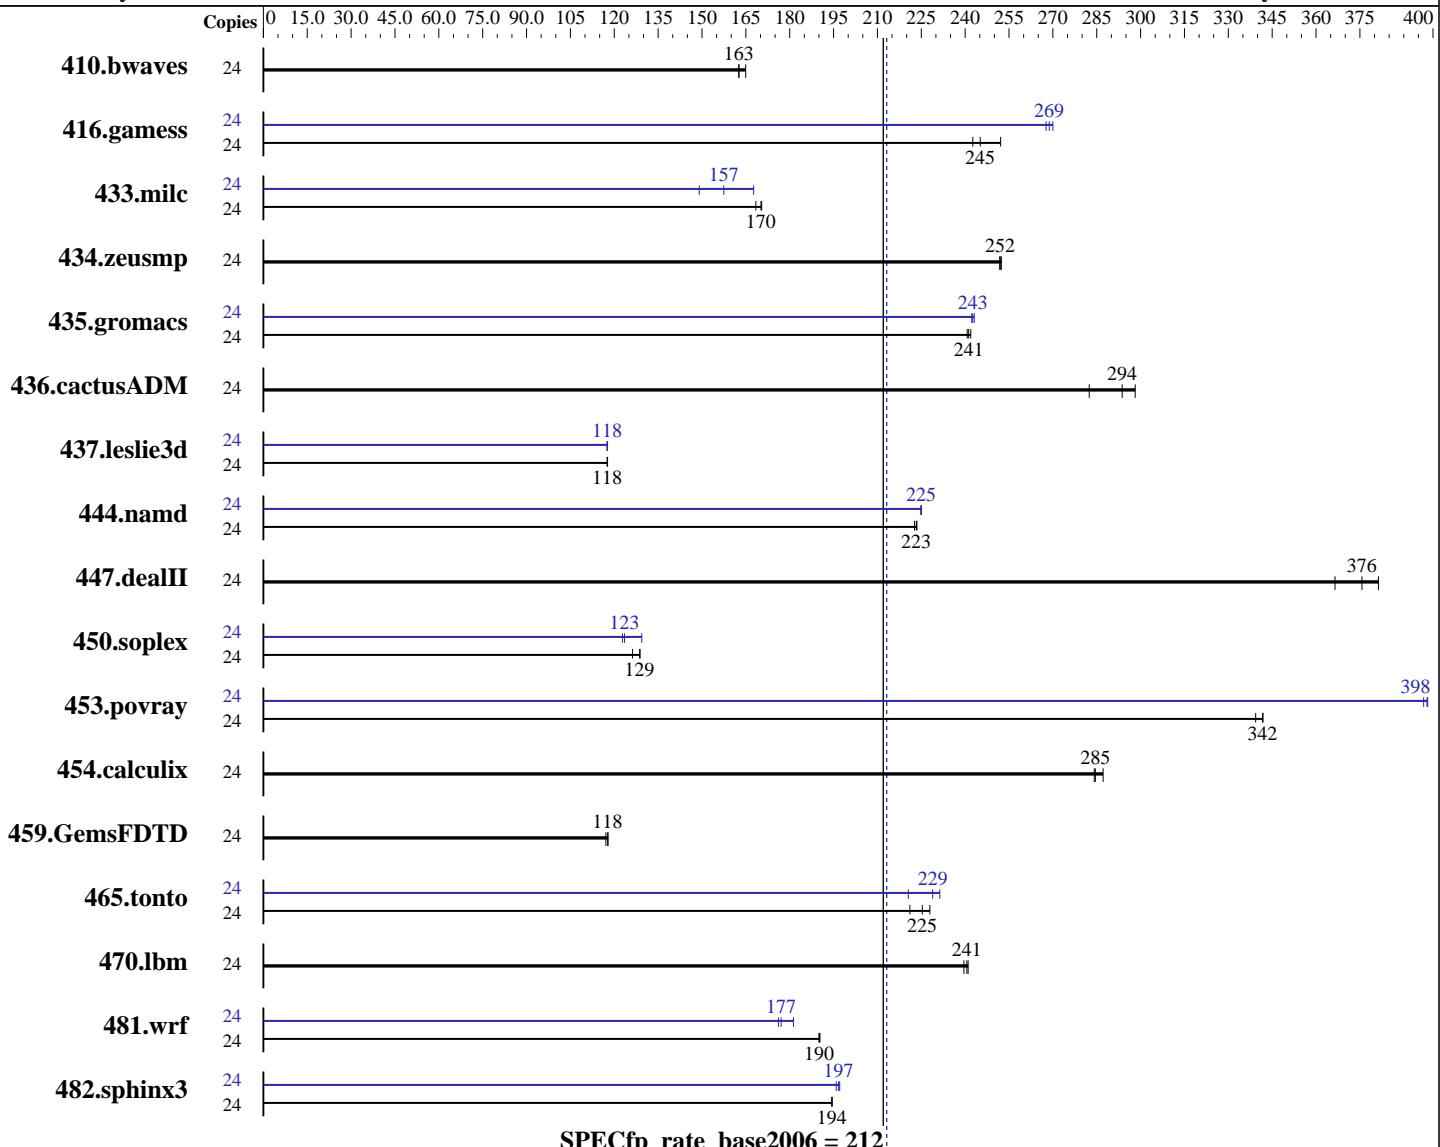

SPECfp_rate_base2006 = 212

SPECfp_rate2006 = 213

Hardware

CPU Name: Intel Xeon E5645
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP2, kernel 3.0.13-0.9-default
Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 = 213
ACTINA SOLAR 220 S4 (Intel Xeon E5645)	SPECfp_rate_base2006 = 212
CPU2006 license: 9008	Test date: Jan-2012
Test sponsor: ACTION S.A.	Hardware Availability: Sep-2011
Tested by: ACTION S.A.	Software Availability: Oct-2011
L3 Cache: 12 MB I+D on chip per chip Other Cache: None Memory: 48 GB (6 x 8 GB 2Rx4 PC3-10600R-9, ECC) Disk Subsystem: 2 TB SATA, 7200 RPM Other Hardware: None	Base Pointers: 32/64-bit Peak Pointers: 32/64-bit Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1977	165	2006	163	2005	163	24	1977	165	2006	163	2005	163
416.gamess	24	1917	245	1937	243	1864	252	24	1748	269	1755	268	1740	270
433.milc	24	1293	170	1295	170	1308	168	24	1314	168	1478	149	1399	157
434.zeusmp	24	867	252	865	252	867	252	24	867	252	865	252	867	252
435.gromacs	24	708	242	710	241	712	241	24	707	242	705	243	706	243
436.cactusADM	24	976	294	962	298	1015	282	24	976	294	962	298	1015	282
437.leslie3d	24	1918	118	1917	118	1918	118	24	1919	118	1917	118	1919	118
444.namd	24	864	223	861	224	862	223	24	856	225	856	225	855	225
447.dealII	24	720	381	731	376	749	366	24	720	381	731	376	749	366
450.soplex	24	1554	129	1586	126	1555	129	24	1630	123	1621	123	1547	129
453.povray	24	373	342	376	339	374	342	24	322	397	321	398	321	398
454.calculix	24	697	284	696	285	689	287	24	697	284	696	285	689	287
459.GemsFDTD	24	2174	117	2160	118	2163	118	24	2174	117	2160	118	2163	118
465.tonto	24	1036	228	1048	225	1068	221	24	1071	221	1021	231	1032	229
470.lbm	24	1368	241	1376	240	1371	241	24	1368	241	1376	240	1371	241
481.wrf	24	1408	190	1410	190	1410	190	24	1522	176	1514	177	1479	181
482.sphinx3	24	2406	194	2406	194	2405	194	24	2378	197	2388	196	2373	197

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 =	213
ACTINA SOLAR 220 S4 (Intel Xeon E5645)	SPECfp_rate_base2006 =	212
CPU2006 license: 9008	Test date:	Jan-2012
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2011
Tested by: ACTION S.A.	Software Availability:	Oct-2011

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
 Filesystem page cache cleared with:
 echo 1> /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
        433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
        465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
  
```

Base Optimization Flags

C benchmarks:
 -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
 -ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 =	213
ACTINA SOLAR 220 S4 (Intel Xeon E5645)	SPECfp_rate_base2006 =	212
CPU2006 license: 9008	Test date:	Jan-2012
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2011
Tested by: ACTION S.A.	Software Availability:	Oct-2011

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECfp_rate2006 =	213
ACTINA SOLAR 220 S4 (Intel Xeon E5645)	SPECfp_rate_base2006 =	212
CPU2006 license: 9008	Test date:	Jan-2012
Test sponsor: ACTION S.A.	Hardware Availability:	Sep-2011
Tested by: ACTION S.A.	Software Availability:	Oct-2011

Peak Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECfp_rate2006 = 213

ACTINA SOLAR 220 S4 (Intel Xeon E5645)

SPECfp_rate_base2006 = 212

CPU2006 license: 9008

Test date: Jan-2012

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2011

Tested by: ACTION S.A.

Software Availability: Oct-2011

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
               -prof-use(pass 2) -opt-prefetch -static -auto-ilp32
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 03:38:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 March 2012.