



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp®\_rate2006 = 114

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

### SPECfp\_rate\_base2006 = 110

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

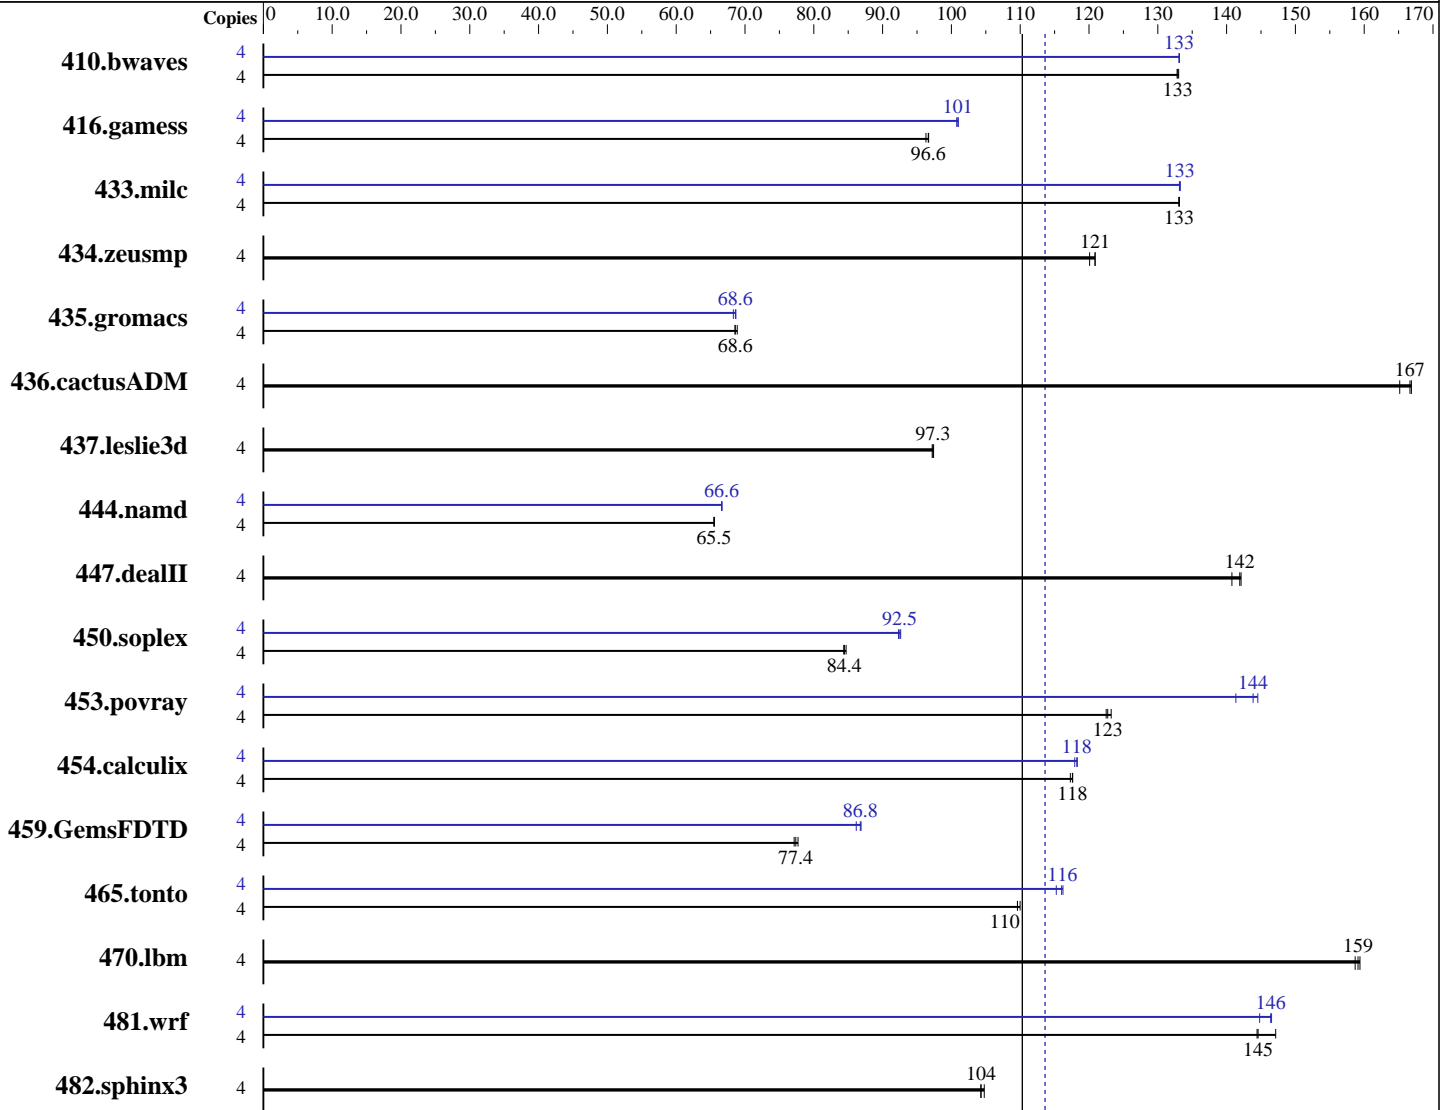

SPECfp\_rate\_base2006 = 110

SPECfp\_rate2006 = 114

### Hardware

CPU Name: Intel Xeon E5-2609  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 114

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

SPECfp\_rate\_base2006 = 110

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Mar-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1067 MHz and CL7)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	409	133	<b>409</b>	<b>133</b>	409	133	4	<b>408</b>	<b>133</b>	408	133	408	133		
416.gamess	4	813	96.3	<b>810</b>	<b>96.6</b>	810	96.7	4	<b>776</b>	<b>101</b>	775	101	777	101		
433.milc	4	276	133	276	133	<b>276</b>	<b>133</b>	4	276	133	276	133	<b>276</b>	<b>133</b>		
434.zeusmp	4	301	121	303	120	<b>301</b>	<b>121</b>	4	301	121	303	120	<b>301</b>	<b>121</b>		
435.gromacs	4	<b>416</b>	<b>68.6</b>	417	68.6	415	68.9	4	<b>416</b>	<b>68.6</b>	416	68.7	418	68.3		
436.cactusADM	4	286	167	<b>287</b>	<b>167</b>	289	165	4	286	167	<b>287</b>	<b>167</b>	289	165		
437.leslie3d	4	387	97.2	386	97.4	<b>386</b>	<b>97.3</b>	4	387	97.2	386	97.4	<b>386</b>	<b>97.3</b>		
444.namd	4	490	65.5	<b>490</b>	<b>65.5</b>	489	65.5	4	482	66.6	481	66.6	<b>482</b>	<b>66.6</b>		
447.dealII	4	322	142	<b>322</b>	<b>142</b>	325	141	4	322	142	<b>322</b>	<b>142</b>	325	141		
450.soplex	4	395	84.3	<b>395</b>	<b>84.4</b>	394	84.7	4	360	92.6	<b>361</b>	<b>92.5</b>	361	92.3		
453.povray	4	173	123	174	122	<b>173</b>	<b>123</b>	4	<b>148</b>	<b>144</b>	147	145	151	141		
454.calculix	4	281	118	<b>281</b>	<b>118</b>	281	117	4	280	118	<b>279</b>	<b>118</b>	279	118		
459.GemsFDTD	4	546	77.7	550	77.1	<b>548</b>	<b>77.4</b>	4	489	86.9	<b>489</b>	<b>86.8</b>	492	86.2		
465.tonto	4	359	110	358	110	<b>359</b>	<b>110</b>	4	342	115	<b>339</b>	<b>116</b>	339	116		
470.lbm	4	346	159	<b>345</b>	<b>159</b>	345	159	4	346	159	<b>345</b>	<b>159</b>	345	159		
481.wrf	4	304	147	309	144	<b>309</b>	<b>145</b>	4	305	147	<b>305</b>	<b>146</b>	309	145		
482.sphinx3	4	748	104	<b>747</b>	<b>104</b>	744	105	4	748	104	<b>747</b>	<b>104</b>	744	105		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 114

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

SPECfp\_rate\_base2006 = 110

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Mar-2012

Tested by: Fujitsu

Software Availability: Dec-2011

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>  
 This result was measured on the PRIMERGY RX350 S7. The PRIMERGY RX350 S7 and the PRIMERGY TX300 S7 are electronically equivalent.  
 For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 114**

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

**SPECfp\_rate\_base2006 = 110**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 114**

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

**SPECfp\_rate\_base2006 = 110**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Mar-2012  
**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 114**

PRIMERGY TX300 S7, Intel Xeon E5-2609, 2.40 GHz

**SPECfp\_rate\_base2006 = 110**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 07:48:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 April 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>