



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 612

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate_base2006 = 588

CPU2006 license: 3


Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

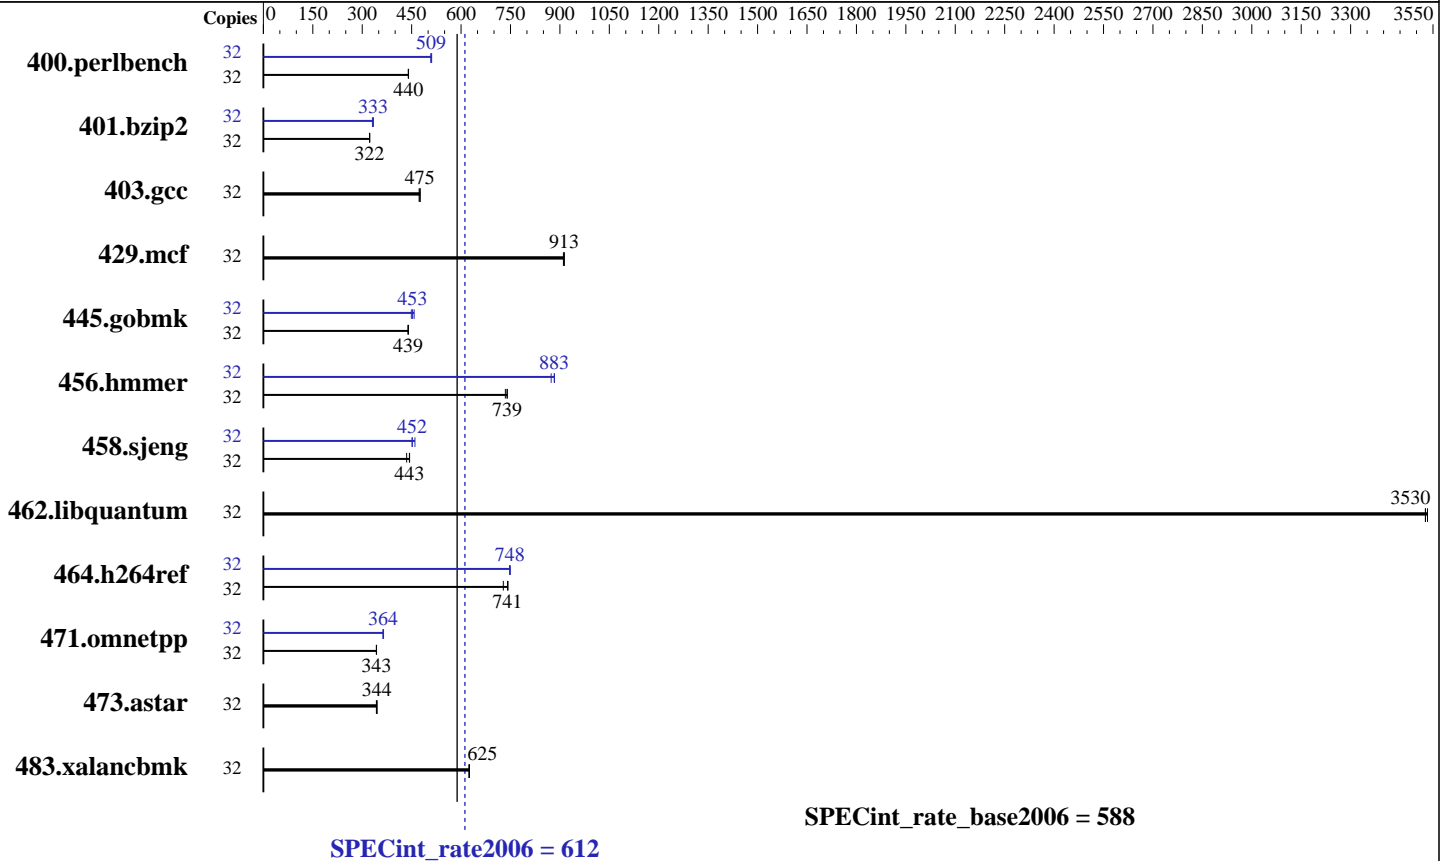

Hardware

CPU Name: Intel Xeon E5-2665
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 2 x 146 GB 15 K SAS, RAID 1
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01
 HP Array Configuration Utility, CLI version



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate2006 = 612

SPECint_rate_base2006 = 588

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Mar-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	710	440	710	441	711	440	32	612	511	614	509	615	508
401.bzip2	32	958	322	956	323	959	322	32	925	334	927	333	933	331
403.gcc	32	541	476	542	475	545	473	32	541	476	542	475	545	473
429.mcf	32	320	911	320	913	320	913	32	320	911	320	913	320	913
445.gobmk	32	764	439	763	440	764	439	32	748	449	734	458	741	453
456.hammer	32	407	734	404	739	403	740	32	342	873	338	883	338	883
458.sjeng	32	873	444	874	443	890	435	32	842	460	858	451	857	452
462.libquantum	32	188	3530	188	3530	188	3530	32	188	3530	188	3530	188	3530
464.h264ref	32	954	743	956	741	972	728	32	945	749	947	748	948	747
471.omnetpp	32	582	343	583	343	583	343	32	551	363	548	365	550	364
473.astar	32	655	343	651	345	652	344	32	655	343	651	345	652	344
483.xalancbmk	32	354	624	353	625	353	626	32	354	624	353	625	353	626

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Drive Write Cache set to Enabled in HP Array Configuration Utility, CLI version

Accelerator Ratio for Reads/Writes set to = 100% Read / 0% Write in HP Array Configuration Utility, CLI version

Platform Notes

BIOS Configuration:
HP Power Profile set to Custom
Energy/Performance Bias is set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Processor Power and Utilization Monitoring set to Disabled

Sysinfo program /cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on rh62 Sun Apr 22 16:36:04 2012

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 612

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate_base2006 = 588

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2665 0 @ 2.40GHz
 2 "physical id"s (chips)
 32 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 8
siblings       : 16
physical 0:    : cores 0 1 2 3 4 5 6 7
physical 1:    : cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB
```

From /proc/meminfo

```
MemTotal:      132120004 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

/usr/bin/lsb_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux rh62 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 22 14:59

SPEC is set to: /cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_rh62-lv_root
                ext4      50G   16G   32G   33% /
```

Additional information from dmidecode:

BIOS HP P70 02/21/2012

Memory:

```
16x Not Specified Not Specified 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 612

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate_base2006 = 588

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

-Wl,-z,muldefs -L/spec/libs2/32 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 612

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate_base2006 = 588

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 612

ProLiant DL380p Gen8
(2.40 GHz, Intel Xeon E5-2665)

SPECint_rate_base2006 = 588

CPU2006 license: 3

Test date: Apr-2012

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2012

Tested by: Hewlett-Packard Company

Software Availability: Mar-2012

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/libs2/32 -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120523.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120523.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:55:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 May 2012.