



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

### SPECfp<sup>®</sup>\_rate2006 = 161

### Express5800/R120d-2E (Intel Xeon E5-2430)

### SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006


Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

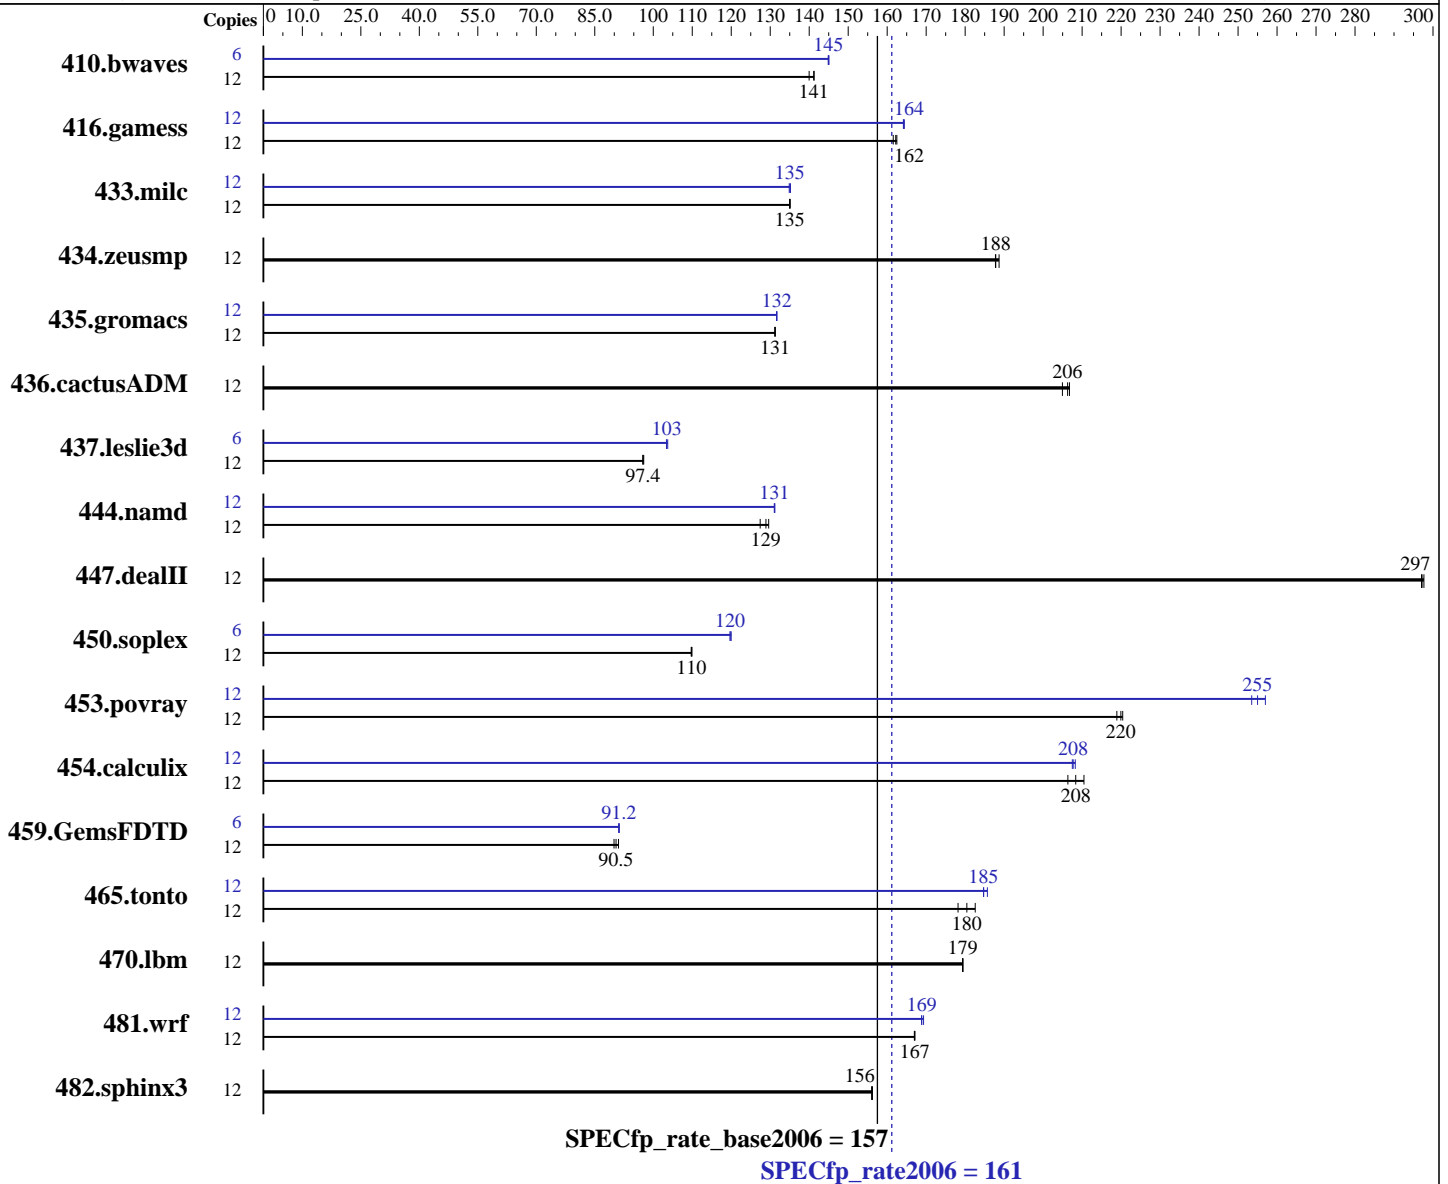

#### Hardware

CPU Name: Intel Xeon E5-2430  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp\_rate2006 = 161

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (3 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	12	<b>1155</b>	<b>141</b>	1165	140	1154	141	6	562	145	<b>563</b>	<b>145</b>	563	145		
416.gamess	12	1446	162	<b>1449</b>	<b>162</b>	1454	162	12	1431	164	1429	164	<b>1431</b>	<b>164</b>		
433.milc	12	815	135	816	135	<b>816</b>	<b>135</b>	12	815	135	<b>816</b>	<b>135</b>	817	135		
434.zeusmp	12	582	188	<b>581</b>	<b>188</b>	579	189	12	582	188	<b>581</b>	<b>188</b>	579	189		
435.gromacs	12	653	131	652	131	<b>653</b>	<b>131</b>	12	651	132	<b>651</b>	<b>132</b>	651	132		
436.cactusADM	12	694	207	700	205	<b>695</b>	<b>206</b>	12	694	207	700	205	<b>695</b>	<b>206</b>		
437.leslie3d	12	1156	97.6	1159	97.3	<b>1158</b>	<b>97.4</b>	6	<b>545</b>	<b>103</b>	544	104	545	103		
444.namd	12	743	130	<b>747</b>	<b>129</b>	755	127	12	734	131	<b>734</b>	<b>131</b>	734	131		
447.dealII	12	461	298	462	297	<b>462</b>	<b>297</b>	12	461	298	462	297	<b>462</b>	<b>297</b>		
450.soplex	12	912	110	911	110	<b>911</b>	<b>110</b>	6	<b>418</b>	<b>120</b>	417	120	418	120		
453.povray	12	292	219	290	220	<b>290</b>	<b>220</b>	12	<b>250</b>	<b>255</b>	248	257	252	253		
454.calculix	12	470	210	<b>475</b>	<b>208</b>	480	206	12	<b>477</b>	<b>208</b>	477	207	475	208		
459.GemsFDTD	12	1416	89.9	<b>1408</b>	<b>90.5</b>	1398	91.1	6	698	91.1	697	91.3	<b>698</b>	<b>91.2</b>		
465.tonto	12	663	178	647	183	<b>654</b>	<b>180</b>	12	636	186	639	185	<b>639</b>	<b>185</b>		
470.lbm	12	<b>919</b>	<b>179</b>	919	179	919	179	12	<b>919</b>	<b>179</b>	919	179	919	179		
481.wrf	12	803	167	<b>802</b>	<b>167</b>	802	167	12	792	169	794	169	<b>794</b>	<b>169</b>		
482.sphinx3	12	1497	156	1499	156	<b>1498</b>	<b>156</b>	12	1497	156	1499	156	<b>1498</b>	<b>156</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 161

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

The Express5800/R120d-1E and  
the Express5800/R120d-2E models are electronically equivalent.  
The results have been measured on the Express5800/R120d-2E model.

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 161

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 161

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp\_rate2006 = 161

Express5800/R120d-2E (Intel Xeon E5-2430)

SPECfp\_rate\_base2006 = 157

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:03:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 July 2012.