



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint®2006 = **44.2**

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = **41.7**

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

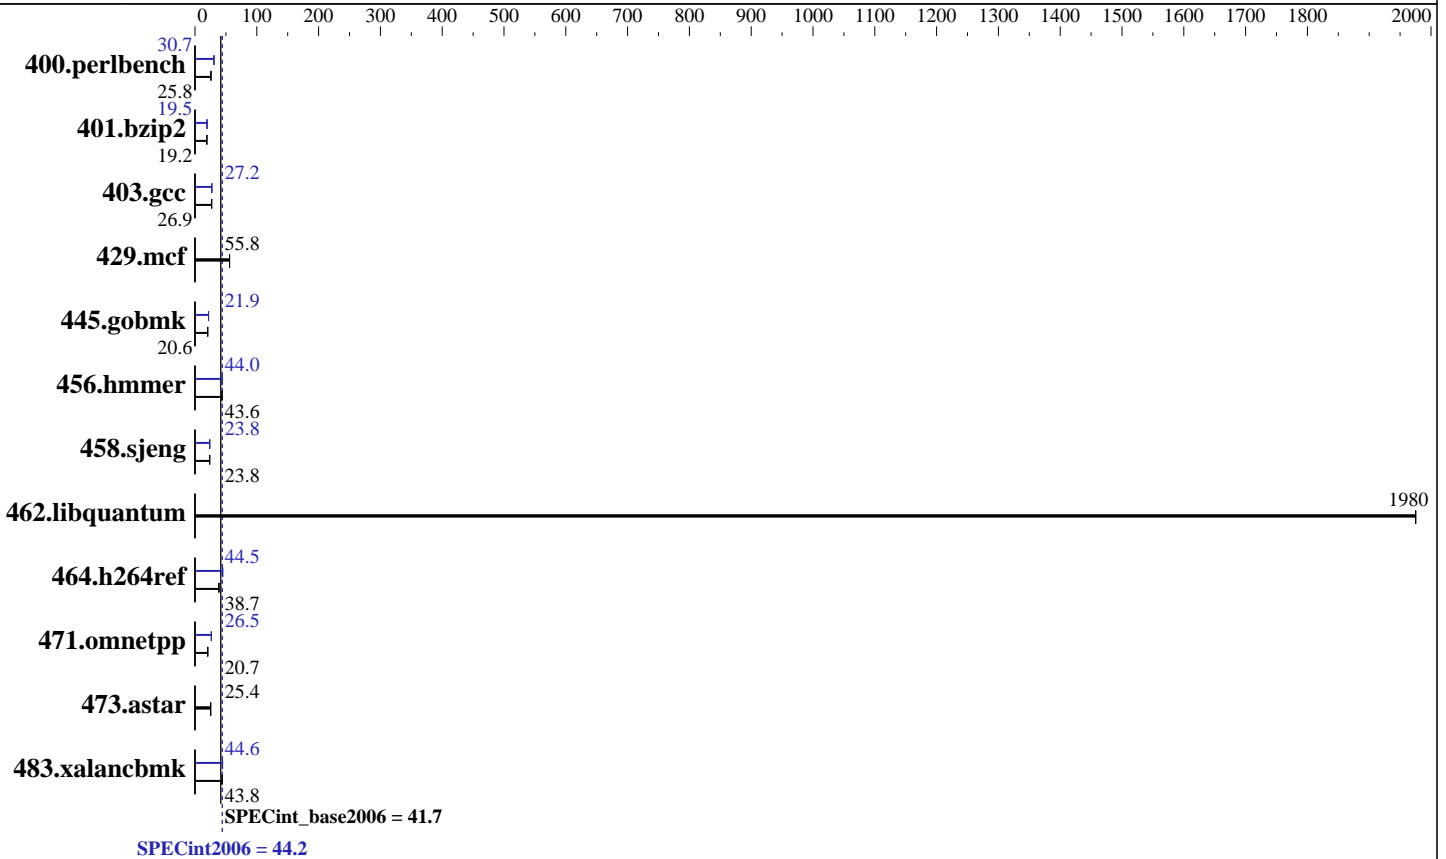

Hardware

CPU Name: Intel Xeon E5-2440
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-10600R-9, ECC)
Disk Subsystem: 2 x 147 GB SAS, 15000 RPM RAID1 configuration
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86_64
Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 44.2

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = 41.7

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Jul-2012
Hardware Availability: Jun-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	378	25.8	<u>379</u>	<u>25.8</u>	379	25.8	<u>319</u>	<u>30.7</u>	318	30.7	320	30.6
401.bzip2	502	19.2	<u>503</u>	<u>19.2</u>	504	19.2	494	19.5	494	19.5	<u>494</u>	<u>19.5</u>
403.gcc	298	27.0	<u>299</u>	<u>26.9</u>	299	26.9	<u>296</u>	<u>27.2</u>	296	27.2	296	27.2
429.mcf	163	56.1	163	55.8	<u>163</u>	<u>55.8</u>	163	56.1	163	55.8	<u>163</u>	<u>55.8</u>
445.gobmk	510	20.6	<u>510</u>	<u>20.6</u>	510	20.6	479	21.9	<u>479</u>	<u>21.9</u>	478	21.9
456.hammer	214	43.6	214	43.7	<u>214</u>	<u>43.6</u>	<u>212</u>	<u>44.0</u>	212	44.0	212	44.0
458.sjeng	509	23.8	510	23.7	<u>509</u>	<u>23.8</u>	508	23.8	507	23.8	<u>508</u>	<u>23.8</u>
462.libquantum	10.5	1980	10.5	1980	<u>10.5</u>	<u>1980</u>	10.5	1980	10.5	1980	<u>10.5</u>	<u>1980</u>
464.h264ref	<u>571</u>	<u>38.7</u>	570	38.9	572	38.7	490	45.2	497	44.5	<u>497</u>	<u>44.5</u>
471.omnetpp	<u>302</u>	<u>20.7</u>	304	20.6	302	20.7	236	26.5	236	26.5	<u>236</u>	<u>26.5</u>
473.astar	278	25.3	<u>277</u>	<u>25.4</u>	276	25.4	278	25.3	<u>277</u>	<u>25.4</u>	276	25.4
483.xalancbmk	<u>157</u>	<u>43.8</u>	157	44.0	158	43.8	<u>155</u>	<u>44.6</u>	155	44.6	155	44.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Wed Jul 11 14:48:31 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2440 0 @ 2.40GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal: 99009112 kB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 44.2

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = 41.7

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 11 14:42
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 44.2

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = 41.7

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Base Portability Flags (Continued)

```

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmarheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 44.2

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = 41.7

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
           -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
         -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
           -ansi-alias

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
           -ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2)
             -opt-ra-region-strategy=block -ansi-alias
             -Wl,-z,muldefs -L/smartheap -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECint2006 = 44.2

BladeSymphony BS320 (Intel Xeon E5-2440)

SPECint_base2006 = 41.7

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Jul-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 11:52:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 July 2012.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 6