



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

## SPECint®\_rate2006 = 555

### Huawei XH320 V2 (Intel Xeon E5-2450)

## SPECint\_rate\_base2006 = 535

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

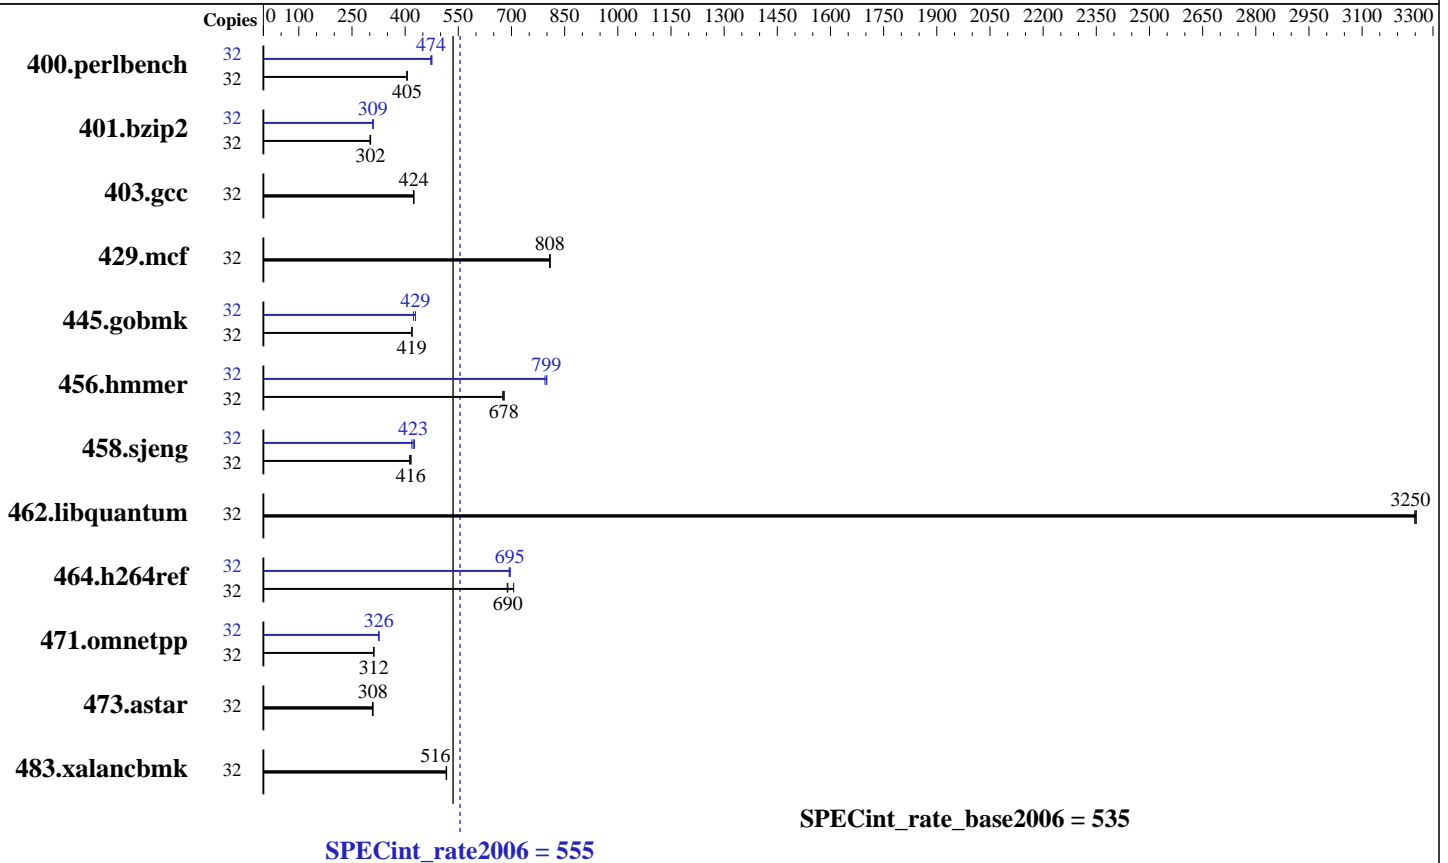

### Hardware

CPU Name: Intel Xeon E5-2450  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 555

## Huawei XH320 V2 (Intel Xeon E5-2450)

SPECint\_rate\_base2006 = 535

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jul-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	770	406	773	404	<u>771</u>	<u>405</u>	32	<u>660</u>	<u>474</u>	662	472	657	476
401.bzip2	32	<u>1021</u>	<u>302</u>	1027	301	1021	303	32	996	310	999	309	<u>999</u>	<u>309</u>
403.gcc	32	606	425	608	424	<u>607</u>	<u>424</u>	32	606	425	608	424	<u>607</u>	<u>424</u>
429.mcf	32	361	809	361	808	<u>361</u>	<u>808</u>	32	361	809	361	808	<u>361</u>	<u>808</u>
445.gobmk	32	801	419	800	419	<u>801</u>	<u>419</u>	32	793	423	<u>782</u>	<u>429</u>	782	429
456.hmmer	32	442	675	<u>440</u>	<u>678</u>	439	679	32	374	799	376	794	<u>374</u>	<u>799</u>
458.sjeng	32	938	413	<u>931</u>	<u>416</u>	930	416	32	908	426	<u>916</u>	<u>423</u>	925	419
462.libquantum	32	204	3250	<u>204</u>	<u>3250</u>	204	3250	32	204	3250	<u>204</u>	<u>3250</u>	204	3250
464.h264ref	32	<u>1027</u>	<u>690</u>	1029	688	1003	706	32	<u>1018</u>	<u>695</u>	1017	696	1021	693
471.omnetpp	32	641	312	<u>642</u>	<u>312</u>	642	311	32	<u>614</u>	<u>326</u>	614	326	614	326
473.astar	32	726	309	<u>728</u>	<u>308</u>	730	308	32	726	309	<u>728</u>	<u>308</u>	730	308
483.xalancbmk	32	428	516	427	517	<u>428</u>	<u>516</u>	32	428	516	427	517	<u>428</u>	<u>516</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
Select only test related files when installing the operating system

### Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Baseboard Management Controller used to adjust the fan speed to 100%  
Sysinfo program /spec/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on DH310-2 Mon Jul 2 18:29:42 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 555

Huawei XH320 V2 (Intel Xeon E5-2450)

SPECint\_rate\_base2006 = 535

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz
 2 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      99030424 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux DH310-2 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Jul 2 18:12

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      289G  23G  252G   9% /

Additional information from dmidecode:

(End of data from sysinfo program)

```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64"

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory  
using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 555

Huawei XH320 V2 (Intel Xeon E5-2450)

SPECint\_rate\_base2006 = 535

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jul-2012  
Hardware Availability: May-2012  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64  
  
456.hmmer: icc -m64  
  
458.sjeng: icc -m64  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 555

Huawei XH320 V2 (Intel Xeon E5-2450)

SPECint\_rate\_base2006 = 535

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 555

Huawei XH320 V2 (Intel Xeon E5-2450)

SPECint\_rate\_base2006 = 535

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20120703.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:14:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 August 2012.