



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint®2006 = 34.2**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint\_base2006 = 31.8**

**CPU2006 license:** 11


**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Nov-2012

**Hardware Availability:** Mar-2012

**Software Availability:** Jun-2012

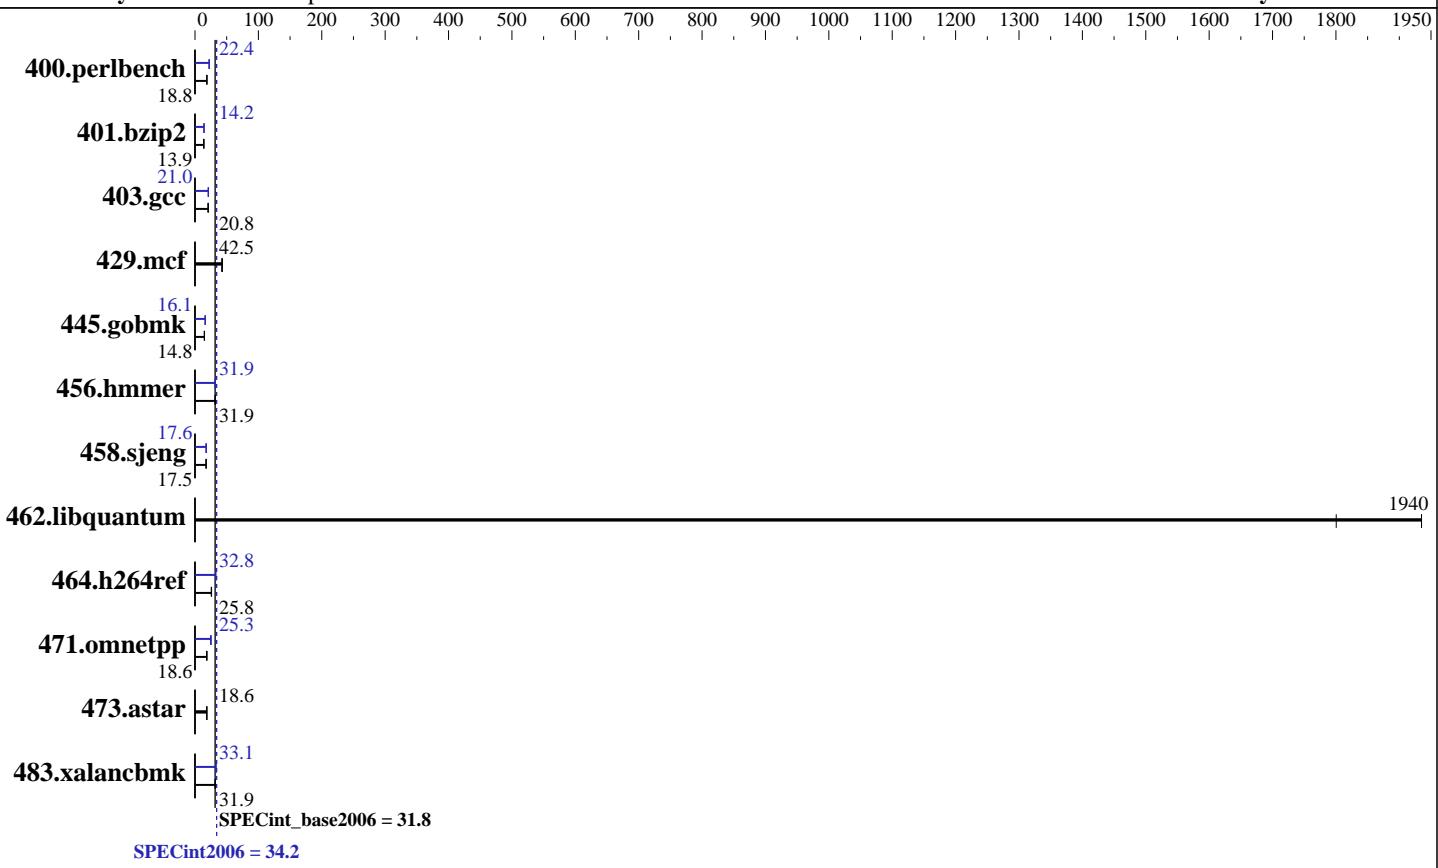

## Hardware

CPU Name: Intel Xeon E5-2648L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 15000 RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)  
 Compiler: 2.6.32-279.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint2006 = 34.2**

**SPECint\_base2006 = 31.8**

**CPU2006 license:** 11

**Test date:** Nov-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2012

**Tested by:** IBM Corporation

**Software Availability:** Jun-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	520	18.8	522	18.7	<b>521</b>	<b>18.8</b>	437	22.4	<b>437</b>	<b>22.4</b>	437	22.4
401.bzip2	692	13.9	<b>693</b>	<b>13.9</b>	693	13.9	<b>678</b>	<b>14.2</b>	678	14.2	679	14.2
403.gcc	388	20.8	388	20.8	<b>388</b>	<b>20.8</b>	384	21.0	383	21.0	<b>384</b>	<b>21.0</b>
429.mcf	215	42.5	211	43.2	<b>215</b>	<b>42.5</b>	215	42.5	211	43.2	<b>215</b>	<b>42.5</b>
445.gobmk	709	14.8	709	14.8	<b>709</b>	<b>14.8</b>	653	16.1	653	16.1	<b>653</b>	<b>16.1</b>
456.hmmer	293	31.9	293	31.9	<b>293</b>	<b>31.9</b>	292	32.0	<b>292</b>	<b>31.9</b>	292	31.9
458.sjeng	<b>690</b>	<b>17.5</b>	690	17.5	691	17.5	687	17.6	<b>687</b>	<b>17.6</b>	687	17.6
462.libquantum	<b>10.7</b>	<b>1940</b>	10.7	1940	11.5	1800	<b>10.7</b>	<b>1940</b>	10.7	1940	11.5	1800
464.h264ref	859	25.8	845	26.2	<b>857</b>	<b>25.8</b>	684	32.4	<b>675</b>	<b>32.8</b>	675	32.8
471.omnetpp	334	18.7	337	18.6	<b>336</b>	<b>18.6</b>	<b>247</b>	<b>25.3</b>	256	24.5	247	25.3
473.astar	<b>377</b>	<b>18.6</b>	375	18.7	378	18.6	<b>377</b>	<b>18.6</b>	375	18.7	378	18.6
483.xalancbmk	216	32.0	216	31.9	<b>216</b>	<b>31.9</b>	209	33.1	<b>209</b>	<b>33.1</b>	210	32.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS Settings:

Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-v1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on x3650M4 Sun Nov 11 10:22:43 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2648L 0 @ 1.80GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 34.2**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint\_base2006 = 31.8**

CPU2006 license: 11

**Test date:** Nov-2012

Test sponsor: IBM Corporation

**Hardware Availability:** Mar-2012

Tested by: IBM Corporation

**Software Availability:** Jun-2012

## Platform Notes (Continued)

```
cache size : 20480 kB

From /proc/meminfo
  MemTotal:       132107616 kB
  HugePages_Total:      0
  Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux x3650M4 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 9 12:39

SPEC is set to: /home/SPECcpu-v1.2
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/mapper/vg_x3650m4-lv_home
            ext4   221G   61G  149G  30%  /home

Additional information from dmidecode:
  Memory:
    16x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu-v1.2/libs/32:/home/SPECcpu-v1.2/libs/64"

OMP\_NUM\_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 34.2**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint\_base2006 = 31.8**

CPU2006 license: 11

Test date: Nov-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Jun-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/smartheap -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32`

`445.gobmk: icc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 34.2**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint\_base2006 = 31.8**

CPU2006 license: 11

**Test date:** Nov-2012

Test sponsor: IBM Corporation

**Hardware Availability:** Mar-2012

Tested by: IBM Corporation

**Software Availability:** Jun-2012

## Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias  
  
401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias  
  
403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32  
  
429.mcf: basepeak = yes  
  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias  
  
456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-ansi-alias  
  
458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint2006 = 34.2**

IBM System x3650 M4 (Intel Xeon E5-2648L)

**SPECint\_base2006 = 31.8**

CPU2006 license: 11

Test date: Nov-2012

Test sponsor: IBM Corporation

Hardware Availability: Mar-2012

Tested by: IBM Corporation

Software Availability: Jun-2012

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
              -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/smartheap -lsmartheap
```

473.astar: basepeak = yes

```
483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
                -Wl,-z,muldefs -L/smartheap -lsmartheap
```

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 13:28:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 December 2012.