



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp®\_rate2006 = 402

SPECfp\_rate\_base2006 = 392

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

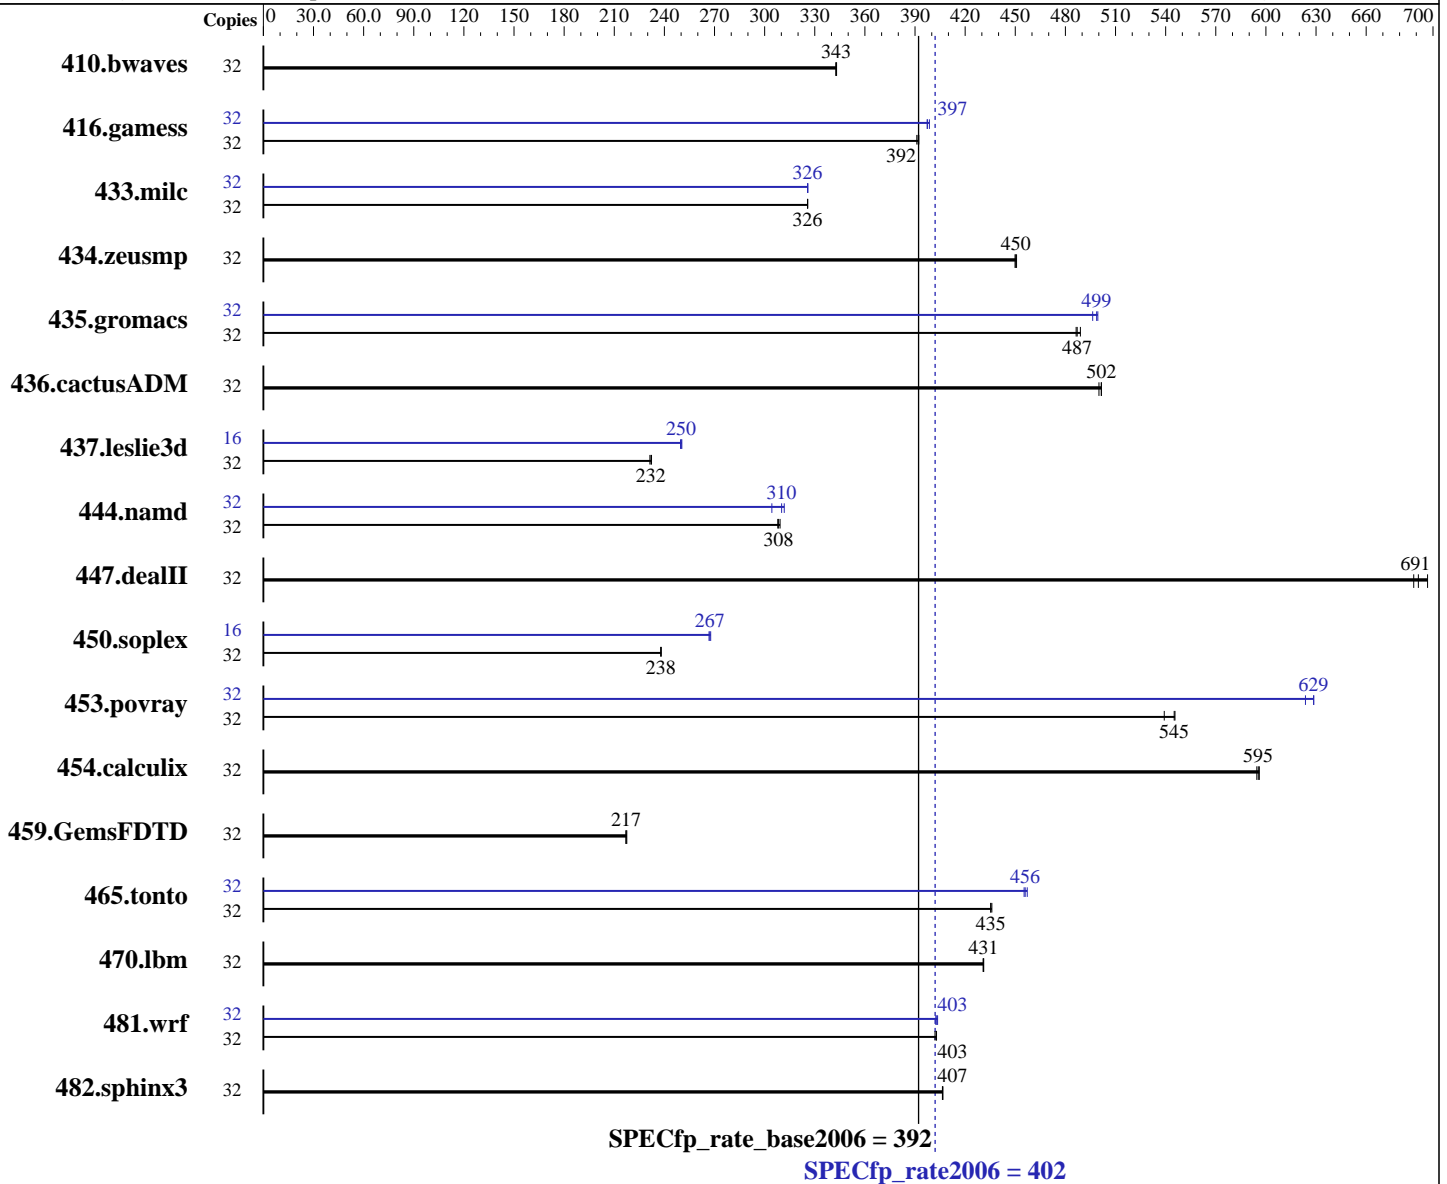

### Hardware

CPU Name: Intel Xeon E5-2440 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

SPECfp\_rate2006 = 402

SPECfp\_rate\_base2006 = 392

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Mar-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1268	343	<u>1269</u>	<u>343</u>	1269	343	32	1268	343	<u>1269</u>	<u>343</u>	1269	343
416.gamess	32	1602	391	1597	392	<u>1599</u>	<u>392</u>	32	1572	399	<u>1577</u>	<u>397</u>	1577	397
433.milc	32	<u>902</u>	<u>326</u>	902	326	902	326	32	<u>902</u>	<u>326</u>	902	326	902	326
434.zeusmp	32	646	451	647	450	<u>647</u>	<u>450</u>	32	646	451	647	450	<u>647</u>	<u>450</u>
435.gromacs	32	<u>469</u>	<u>487</u>	467	489	470	486	32	458	499	<u>458</u>	<u>499</u>	460	496
436.cactusADM	32	762	502	765	500	<u>763</u>	<u>502</u>	32	762	502	765	500	<u>763</u>	<u>502</u>
437.leslie3d	32	1300	231	1295	232	<u>1297</u>	<u>232</u>	16	<u>601</u>	<u>250</u>	601	250	602	250
444.namd	32	830	309	<u>832</u>	<u>308</u>	834	308	32	<u>827</u>	<u>310</u>	823	312	843	304
447.dealII	32	532	688	525	697	<u>530</u>	<u>691</u>	32	532	688	525	697	<u>530</u>	<u>691</u>
450.soplex	32	<u>1122</u>	<u>238</u>	1122	238	1121	238	16	<u>499</u>	<u>267</u>	500	267	498	268
453.povray	32	316	539	<u>312</u>	<u>545</u>	312	546	32	271	629	273	624	<u>271</u>	<u>629</u>
454.calculix	32	443	596	444	595	<u>443</u>	<u>595</u>	32	443	596	444	595	<u>443</u>	<u>595</u>
459.GemsFDTD	32	<u>1564</u>	<u>217</u>	1561	218	1565	217	32	<u>1564</u>	<u>217</u>	1561	218	1565	217
465.tonto	32	722	436	723	435	<u>723</u>	<u>435</u>	32	692	455	<u>691</u>	<u>456</u>	689	457
470.lbm	32	1021	431	1020	431	<u>1020</u>	<u>431</u>	32	1021	431	1020	431	<u>1020</u>	<u>431</u>
481.wrf	32	887	403	<u>888</u>	<u>403</u>	889	402	32	<u>887</u>	<u>403</u>	888	402	886	404
482.sphinx3	32	<u>1534</u>	<u>407</u>	1535	406	1534	407	32	<u>1534</u>	<u>407</u>	1535	406	1534	407

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

**SPECfp\_rate2006 = 402**

**SPECfp\_rate\_base2006 = 392**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

**SPECfp\_rate2006 = 402**

**SPECfp\_rate\_base2006 = 392**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Nov-2013

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 402**

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

**SPECfp\_rate\_base2006 = 392**

**CPU2006 license:** 11

**Test date:** Mar-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2014

**Tested by:** IBM Corporation

**Software Availability:** Nov-2013

## Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

```

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3630 M4  
(Intel Xeon E5-2440 v2, 1.90 GHz)

**SPECfp\_rate2006 = 402**

**SPECfp\_rate\_base2006 = 392**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Mar-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:57:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 April 2014.