



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 84.1

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_base2006 = 79.6

CPU2006 license: 3


Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

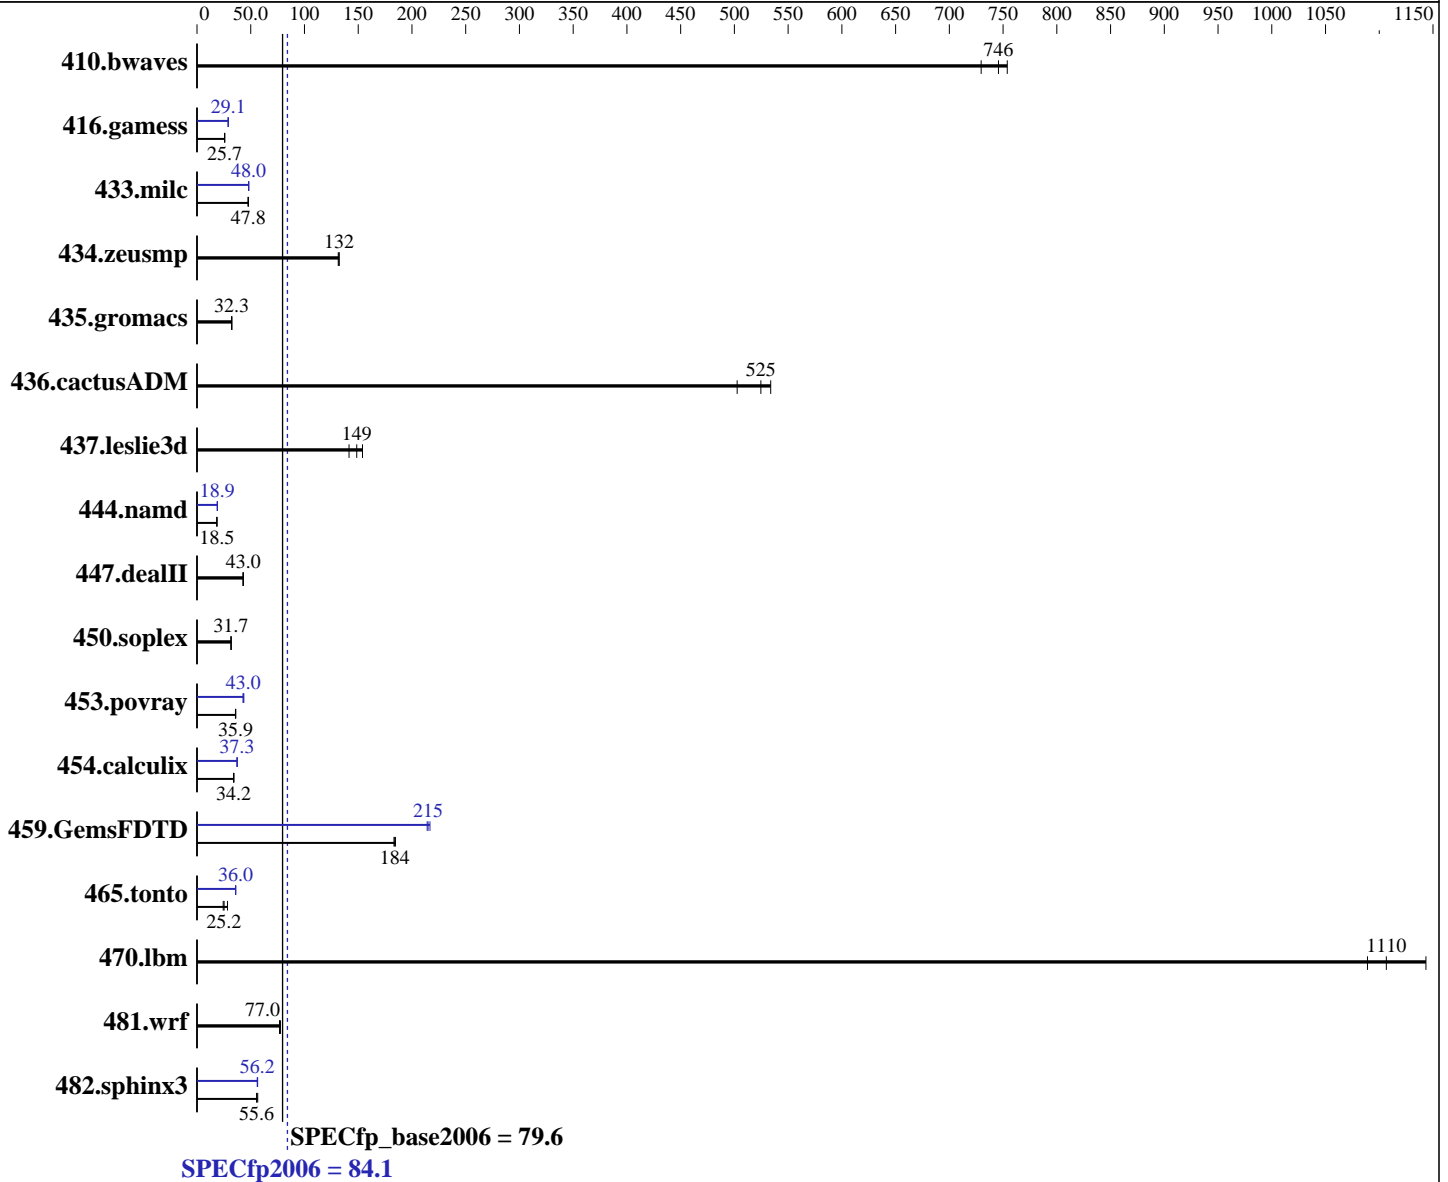

Hardware

CPU Name: Intel Xeon E7-4830 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **84.1**

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_base2006 = **79.6**

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)
Disk Subsystem: 1 x 400 GB SSD SAS, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	18.6	730	18.2	746	18.0	754	18.6	730	18.2	746	18.0	754
416.gamess	762	25.7	760	25.7	760	25.8	673	29.1	674	29.1	675	29.0
433.milc	192	47.8	192	47.8	193	47.5	191	48.0	190	48.3	191	48.0
434.zeusmp	69.2	131	68.8	132	68.8	132	69.2	131	68.8	132	68.8	132
435.gromacs	221	32.3	221	32.3	221	32.3	221	32.3	221	32.3	221	32.3
436.cactusADM	22.8	525	23.8	503	22.4	534	22.8	525	23.8	503	22.4	534
437.leslie3d	63.2	149	61.0	154	66.5	141	63.2	149	61.0	154	66.5	141
444.namd	434	18.5	433	18.5	433	18.5	424	18.9	424	18.9	424	18.9
447.dealII	267	42.8	266	43.0	265	43.1	267	42.8	266	43.0	265	43.1
450.soplex	263	31.7	262	31.8	263	31.7	263	31.7	262	31.8	263	31.7
453.povray	147	36.1	149	35.8	148	35.9	124	42.9	124	43.0	122	43.6
454.calculix	241	34.3	242	34.1	242	34.2	220	37.4	221	37.3	221	37.3
459.GemsFDTD	57.9	183	57.5	185	57.7	184	48.9	217	49.5	214	49.3	215
465.tonto	347	28.4	404	24.4	390	25.2	273	36.0	274	35.9	274	36.0
470.lbm	12.4	1110	12.0	1140	12.6	1090	12.4	1110	12.0	1140	12.6	1090
481.wrf	145	77.0	144	77.6	145	76.8	145	77.0	144	77.6	145	76.8
482.sphinx3	345	56.5	351	55.5	351	55.6	347	56.2	345	56.4	347	56.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
Disabled unused Linux services through "stop_services.sh" before running.
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 84.1

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_base2006 = 79.6

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes

BIOS Configuration:

```

HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C6 State to Enabled
Minimum Processor Idle Power Packages State set to Package C6 (non-retention) State
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to Disabled

```

```

Sysinfo program /cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on DL580-Gen8-sr Wed Apr 16 17:49:19 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E7-4830 v2 @ 2.20GHz
 4 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 10
siblings       : 20
physical 0:    : cores 0 1 2 3 4 8 9 10 11 12
physical 1:    : cores 0 1 2 3 4 8 9 10 11 12
physical 2:    : cores 0 1 2 3 4 8 9 10 11 12
physical 3:    : cores 0 1 2 3 4 8 9 10 11 12
cache size     : 20480 KB

```

From /proc/meminfo

```

MemTotal:      1058855444 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

uname -a:

```

Linux DL580-Gen8-sr 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux

```

```
run-level 3 Apr 16 17:47 last=S
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp2006 = 84.1

SPECfp_base2006 = 79.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext3	365G	13G	334G	4%	/

Additional information from dmidecode:

BIOS HP P79 02/21/2014

Memory:

64x HP 712383-081 16 GB 1333 MHz
32x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have one line reading as:

64x HP 712383-081 16 GB 1333 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Assuming that the memory populations rules found in the DL580 Gen8 QuickSpecs are followed, HP supports memory running at 1333 MHz on the E7-4850 v2, E7-4830 v2, E7-4820 v2, or E7-4809 v2 processors with any BIOS prior to the 1.03_06-27-2014 ROM. Any BIOS that is the 1.03_06-27-2014 ROM or later, does not support the memory running at 1333 MHz due to a change in the Intel MRC (Memory Reference Code).

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 84.1

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_base2006 = 79.6

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

```

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

```

Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 84.1

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp_base2006 = 79.6

CPU2006 license: 3

Test date: Apr-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen8
(2.20 GHz, Intel Xeon E7-4830 v2)

SPECfp2006 = 84.1

SPECfp_base2006 = 79.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Apr-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Sep 18 12:39:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 May 2014.